


SMART [4] 2.0 DALI

GEWISS

LOWBAY - HIGHBAY - FLOODLIGHTS

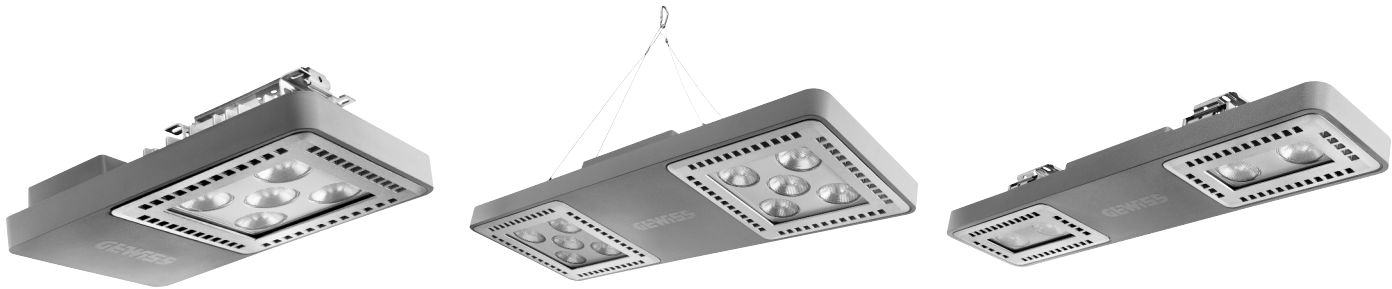

CE

IP66

⏏

💡

▽D

⚠

⚡

+50°C

-30°C

t_q


+25°C

💡

👤

					t _a
	1,8	Max 8 m	0,079 m²	0,01 m²	+50°C
	3	Max 8 m	0,117 m²	0,01 m²	+50°C
	3	Max 8 m	0,097 m²	0,029 m²	+50°C
	3,2	Max 8 m	0,097 m²	0,029 m²	+50°C
	5,3	Max 15 m	0,184 m²	0,022 m²	+40°C
	6	Max 15 m	0,184 m²	0,022 m²	+50°C
	12	Max 15 m	0,35 m²	0,045 m²	+40°C
	13	Max 15 m	0,35 m²	0,045 m²	+50°C

GW S4 xxxGV: ta 40°C

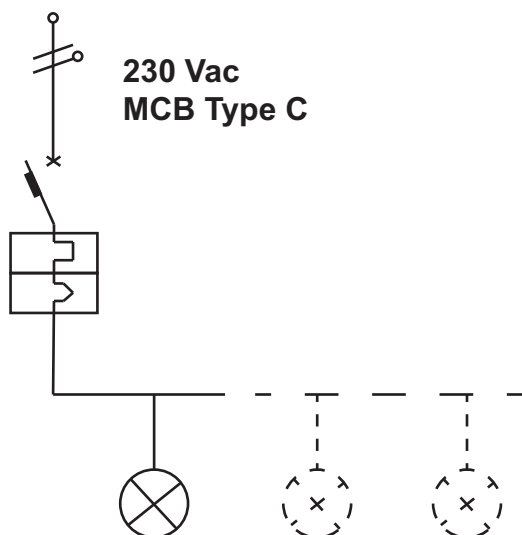

MCB current	10 A	16 A	20 A
Max number of SMART			
SMART [4] 2L	62	102	125
SMART [4] 2+2L	30	48	62
SMART [4] 4L	30	48	62
SMART [4] 5L	30	48	62
SMART [4] 4+4L	15	24	31
SMART [4] 5+5L	15	24	31
SMART [4] 4x4L	7	12	15
SMART [4] 4x5L	7	12	15

LED CCT:

Optics:


≤ 5700 K

	100°	60°	30°	10°	Elliptical	Asymmetrical
	RG1:	RG1:	RG1:	RG1:	RG1:	RG1:
SMART [4] 2L	1 m	1,7 m	2,2 m	4 m	5 m	5,5 m
SMART [4] 2+2L	1 m	1,7 m	2,2 m	4 m	5 m	5,5 m
SMART [4] 4L	1 m	1,7 m	2,2 m	4 m	5 m	5,5 m
SMART [4] 5L	1 m	1,7 m	2,2 m	4 m	5 m	5,5 m
SMART [4] 4+4L	1 m	1,7 m	2,2 m	4 m	5 m	5,5 m
SMART [4] 5+5L	1 m	1,7 m	2,2 m	4 m	5 m	5,5 m
SMART [4] 4x4L	1 m	1,7 m	2,2 m	4 m	5 m	5,5 m
SMART [4] 4x5L	1 m	1,7 m	2,2 m	4 m	5 m	5,5 m







1

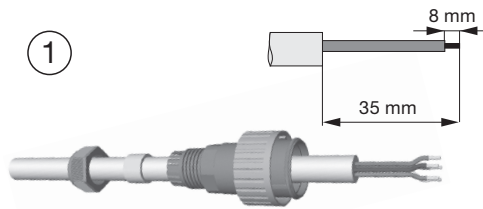


3

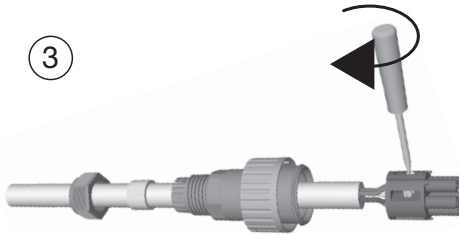


5

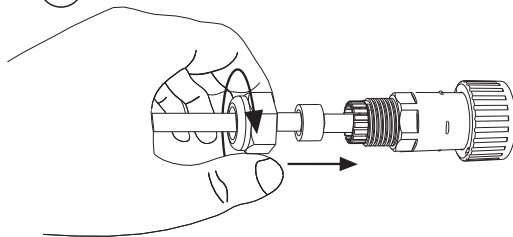


7

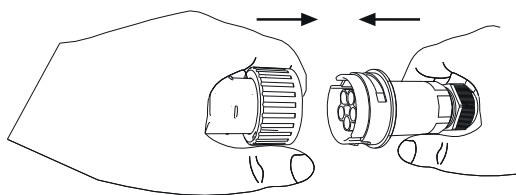


2

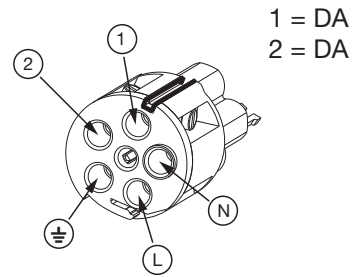


4

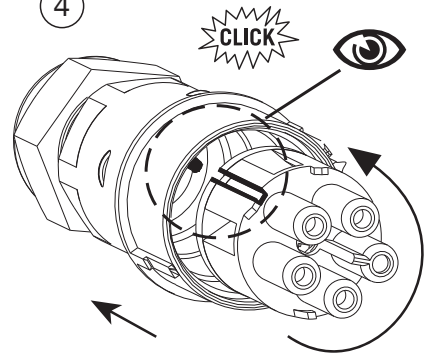



6

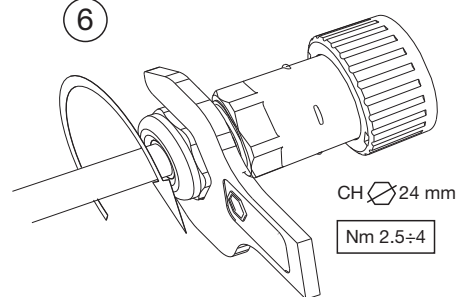





8

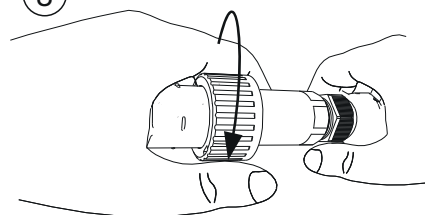

Min. + 30 cm

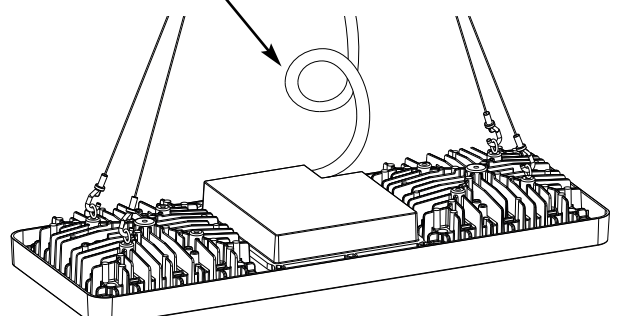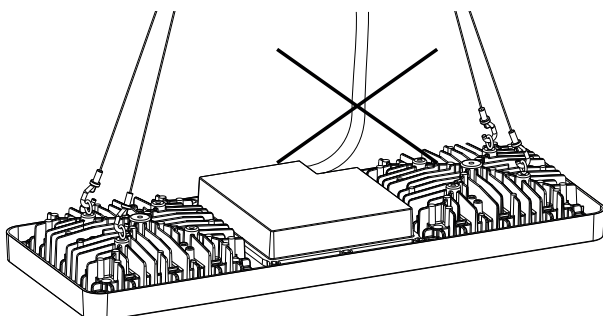


SMART [4] 4X4L - 4x5L

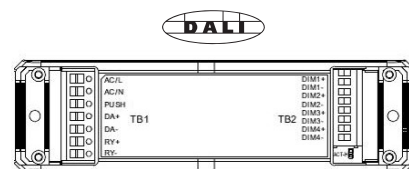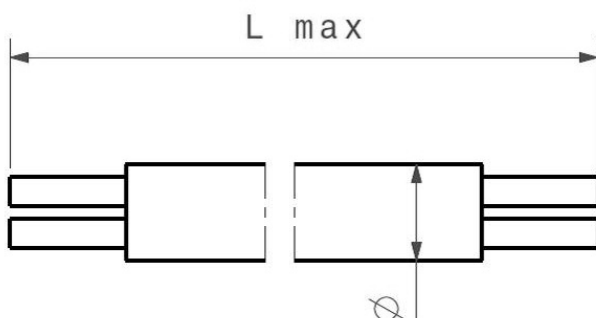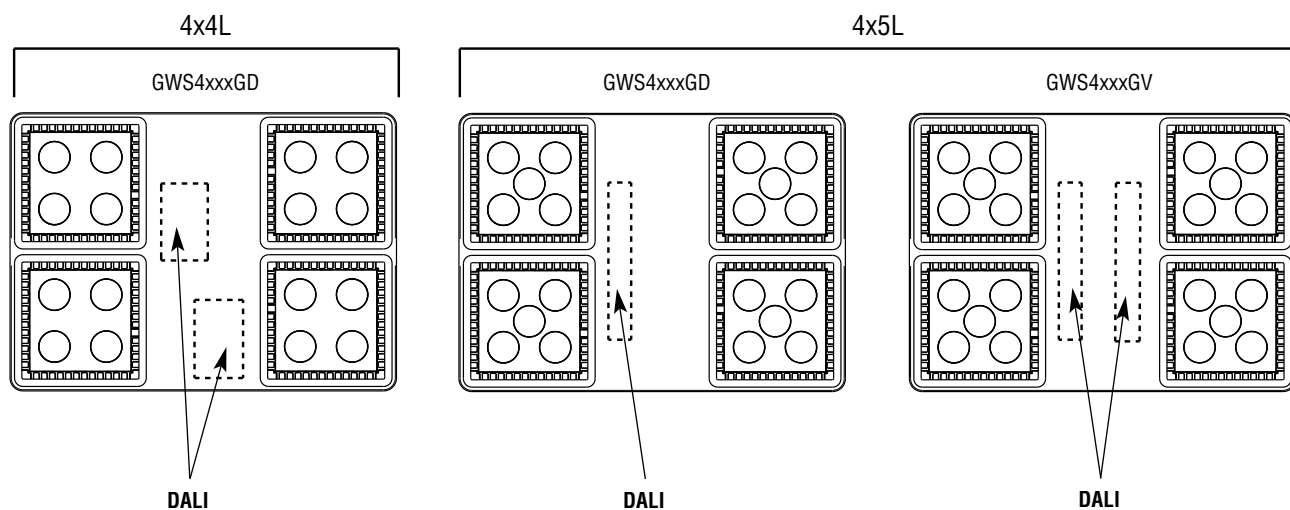

Ø	1,5 mm ²	1 mm ²	0,75 mm ²	0,5 mm ²
L max	300 m	180 m	110 m	80 m









Bus DALI




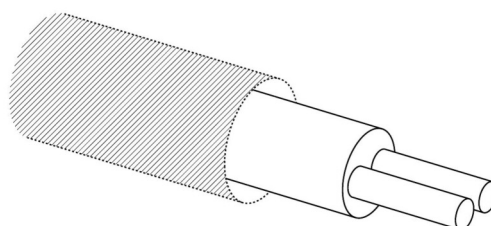





SMART [4] LOWBAY 2L

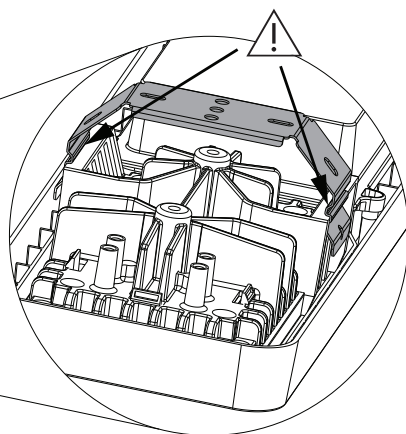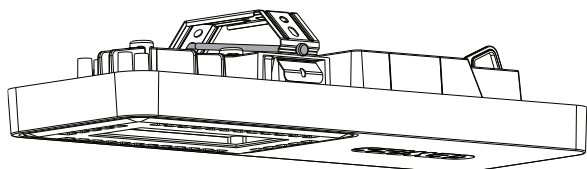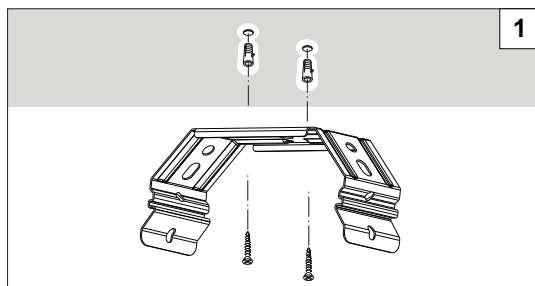








2 Nm


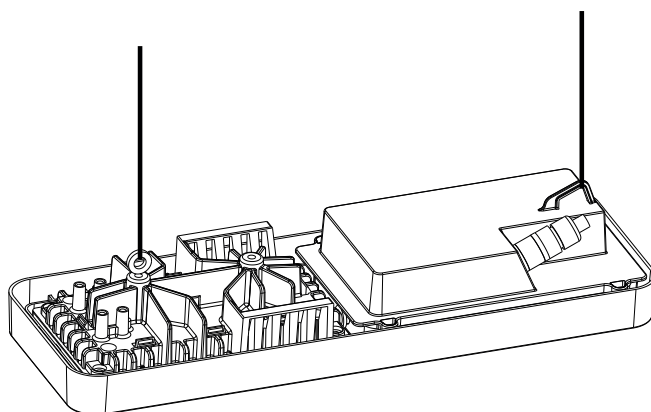
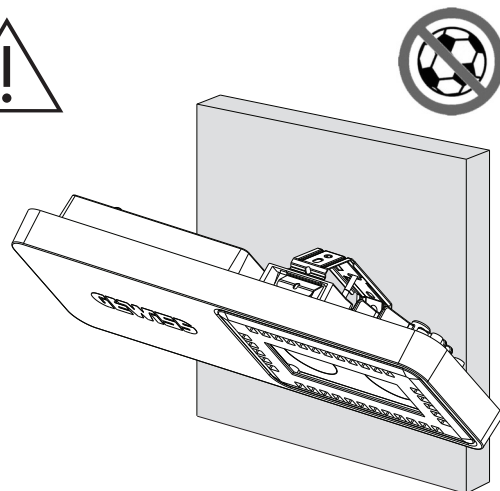
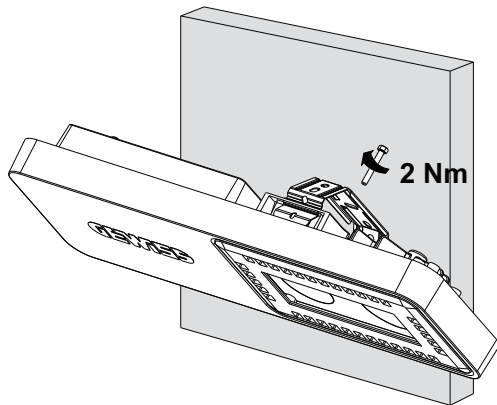
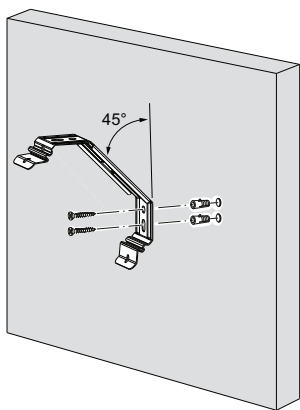


SMART [4] LOWBAY 2+2L

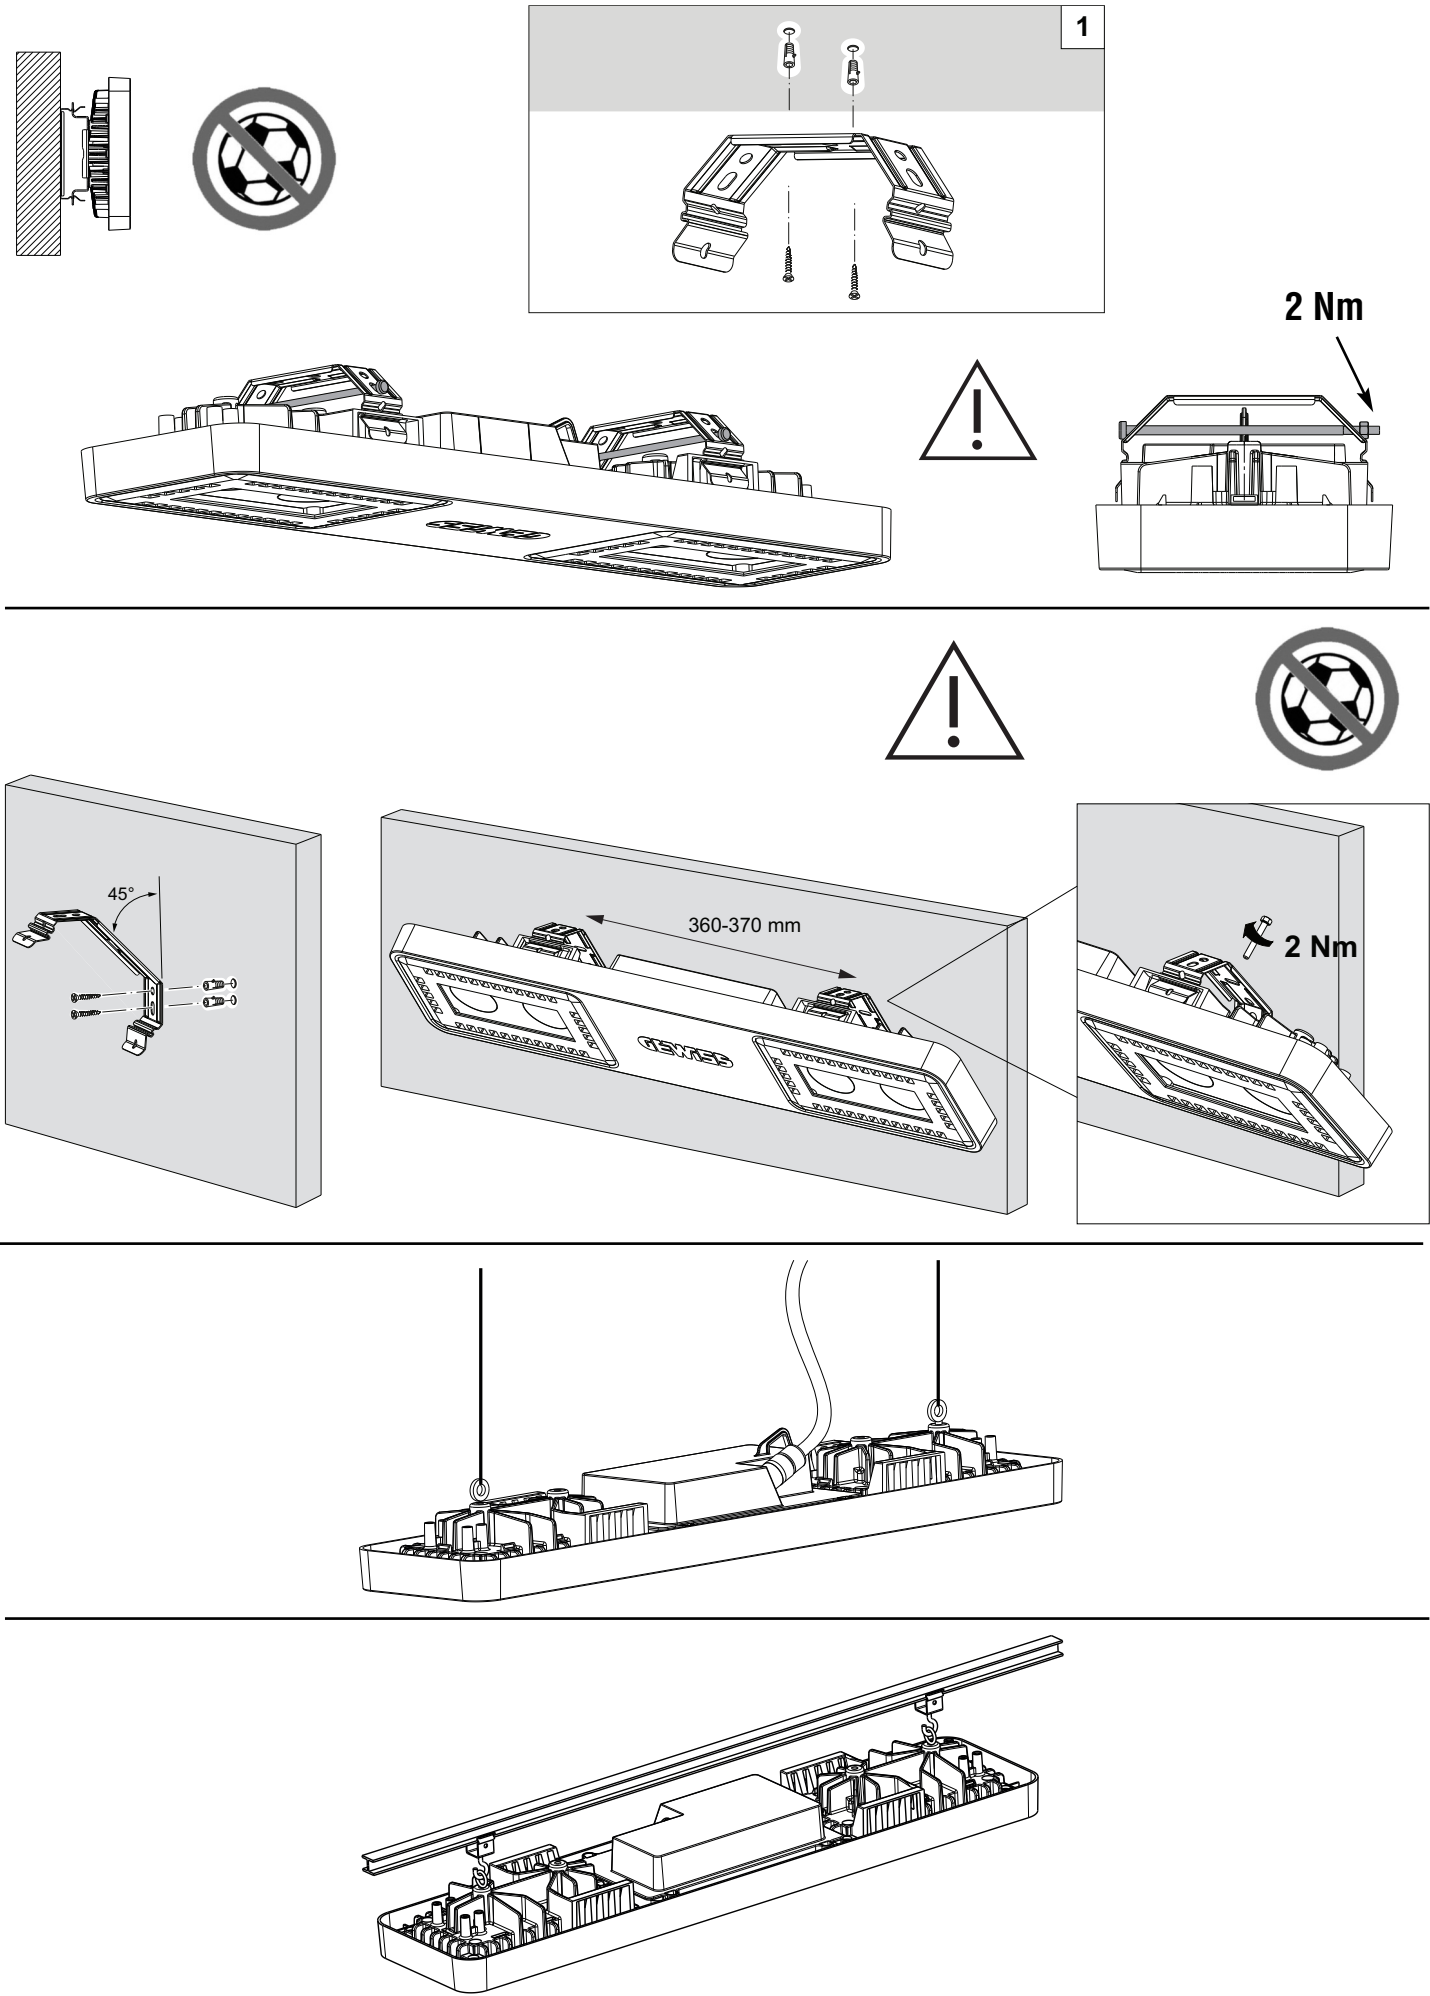

SMART [4] LOWBAY 4L/5L

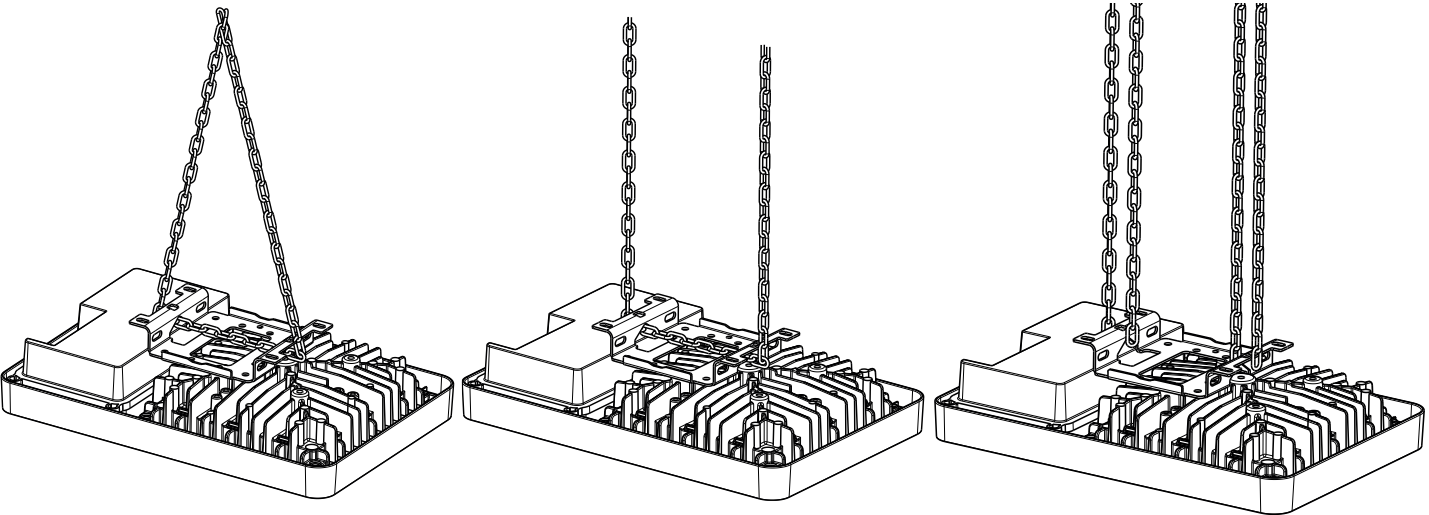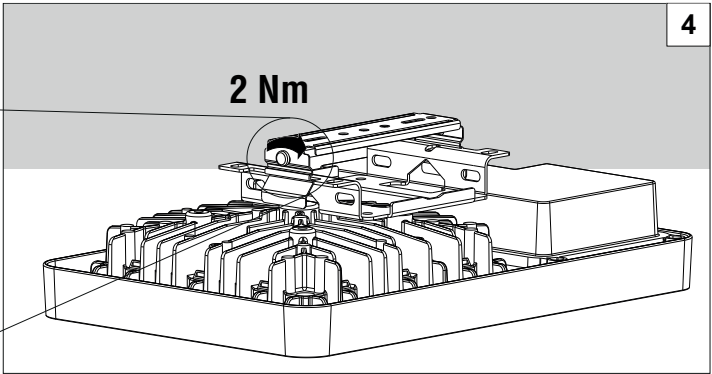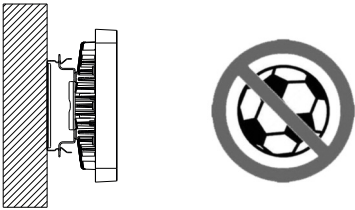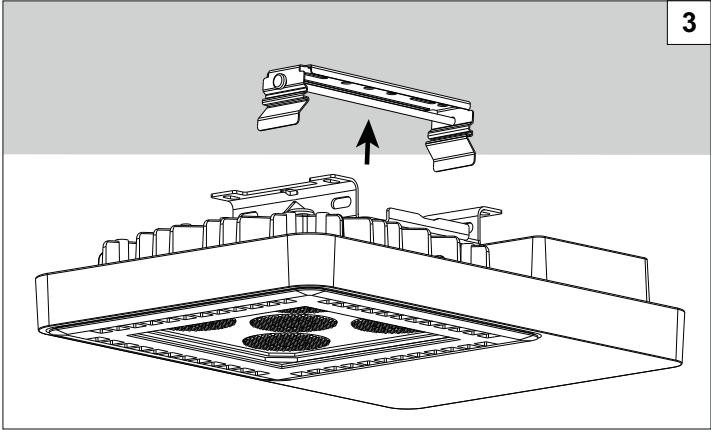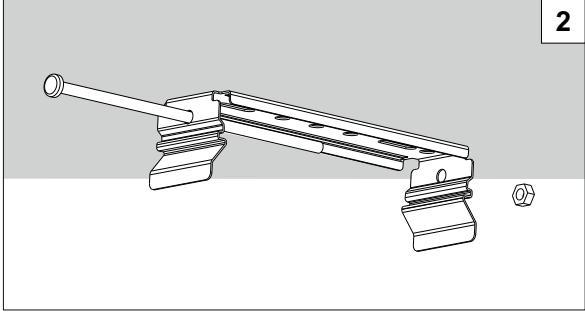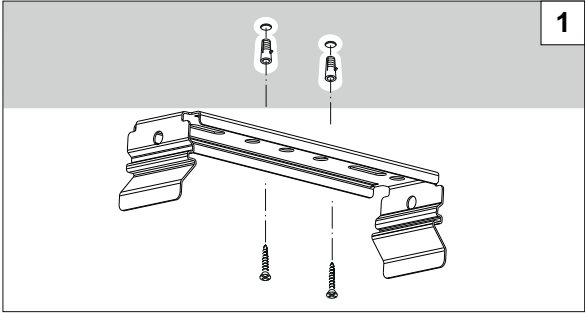

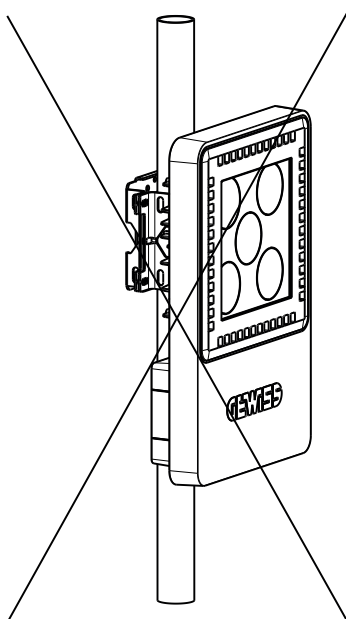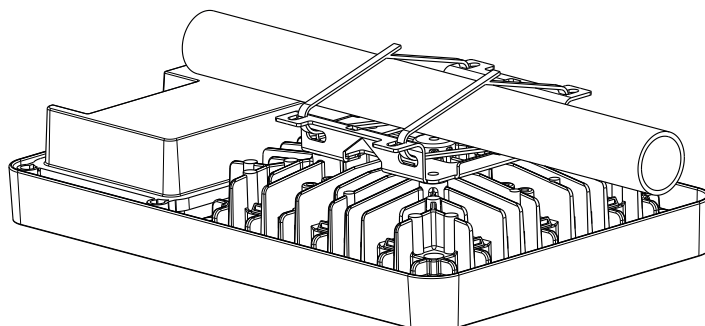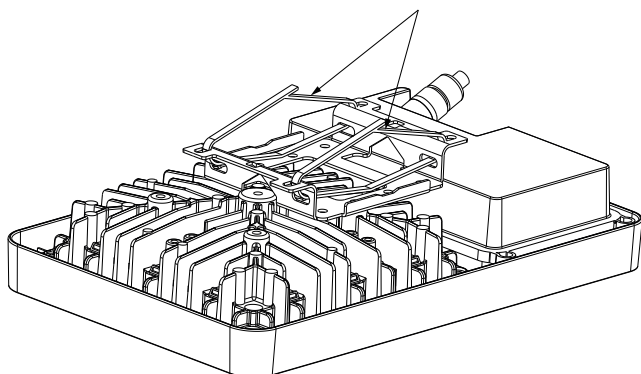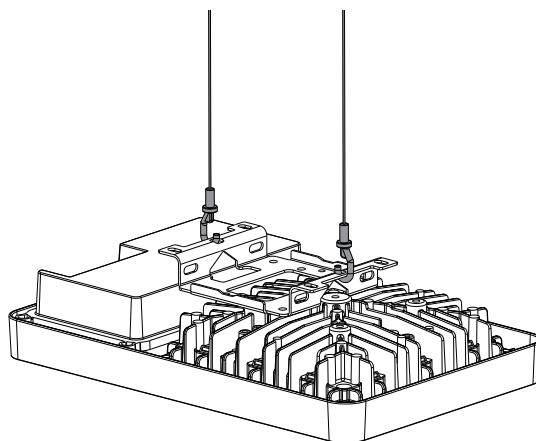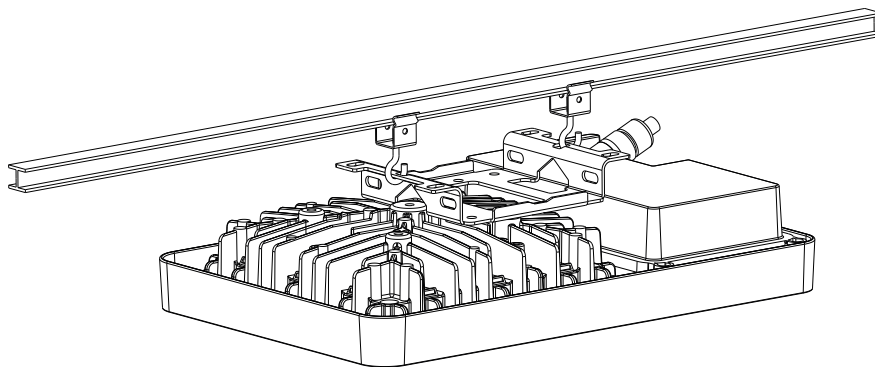


N°4 M6x40



N°4 D6







N°4 M6


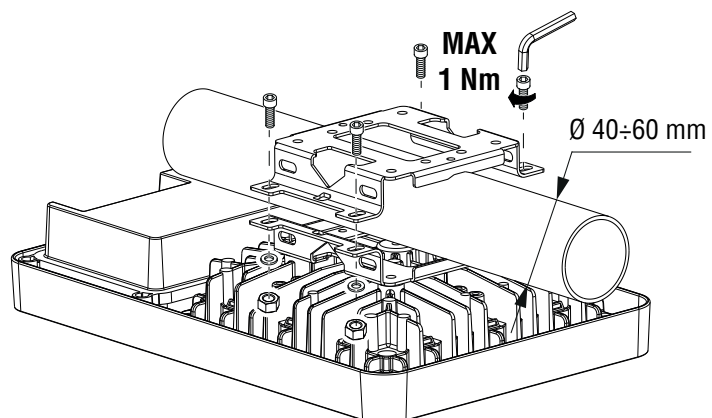


GWL1926 for SMART 4L / 5L
GWL1930 for SMART 4+4L / 5+5L




SMART [4] HIGHBAY 4+4L/5+5L

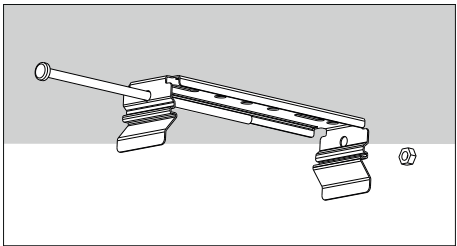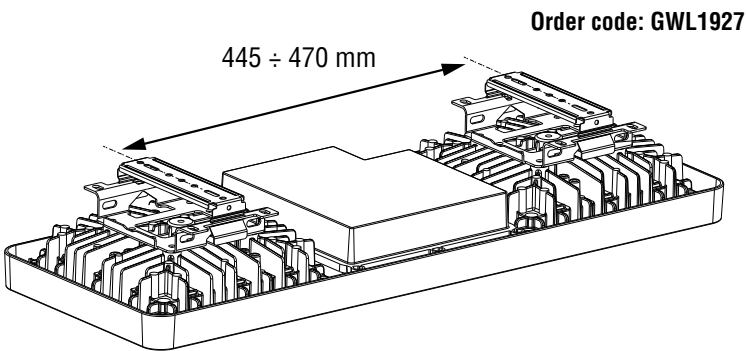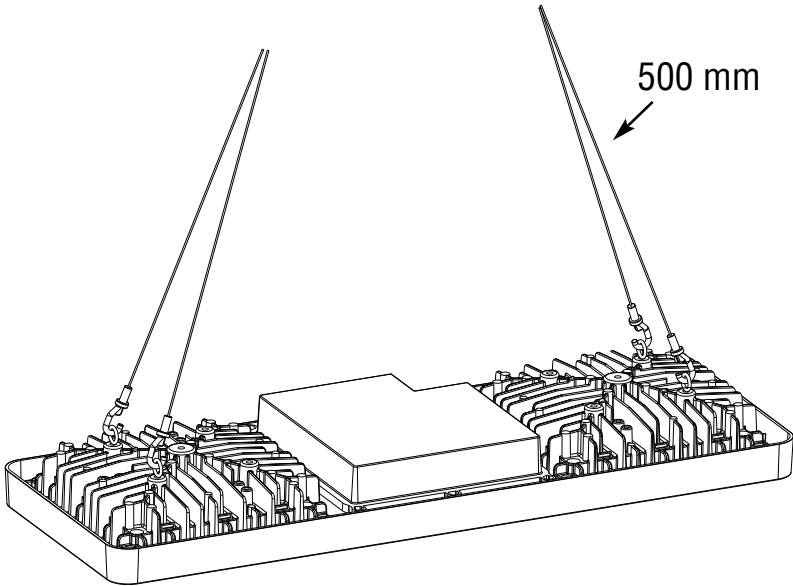



SMART [4] HIGHBAY 4x4L / 4x5L

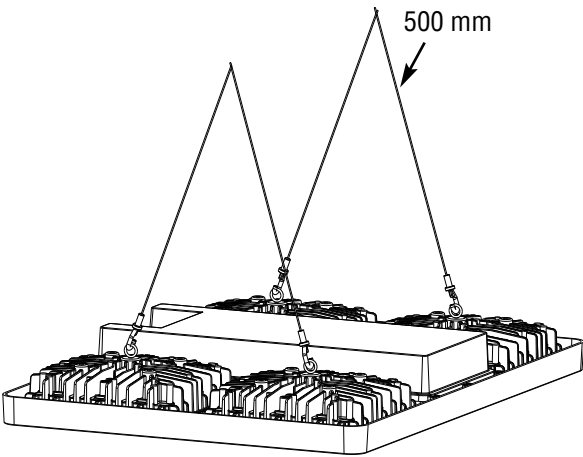


Order code: GWL1928

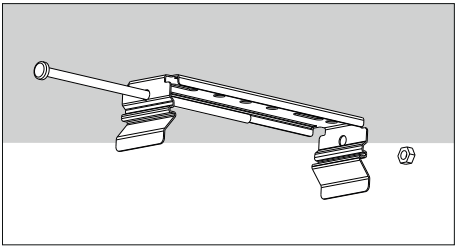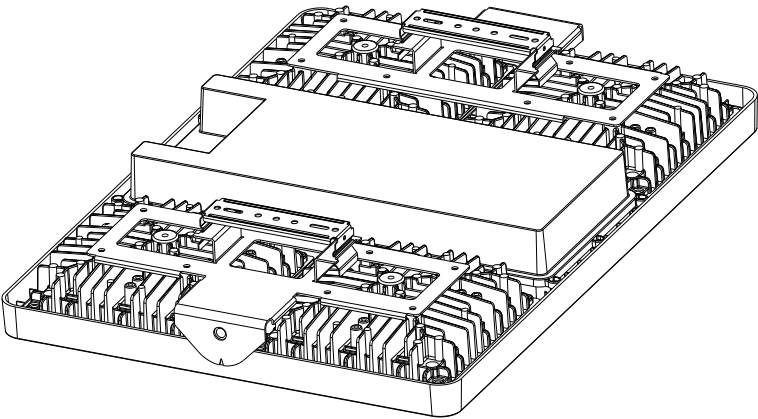


SMART [4] 2L / 2+2L / 4L / 5L / 4+4L / 5+5L / 4x4L / 4x5L

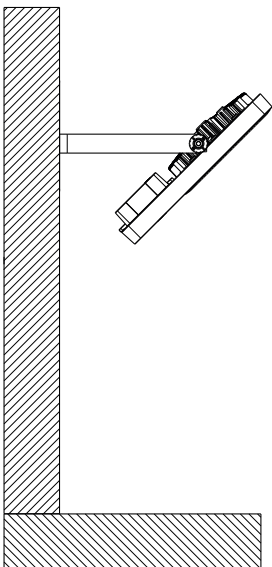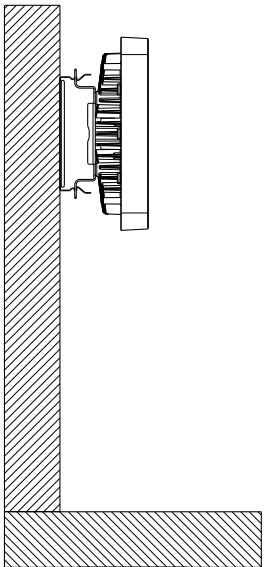




SMART [4] 2L / 2+2L

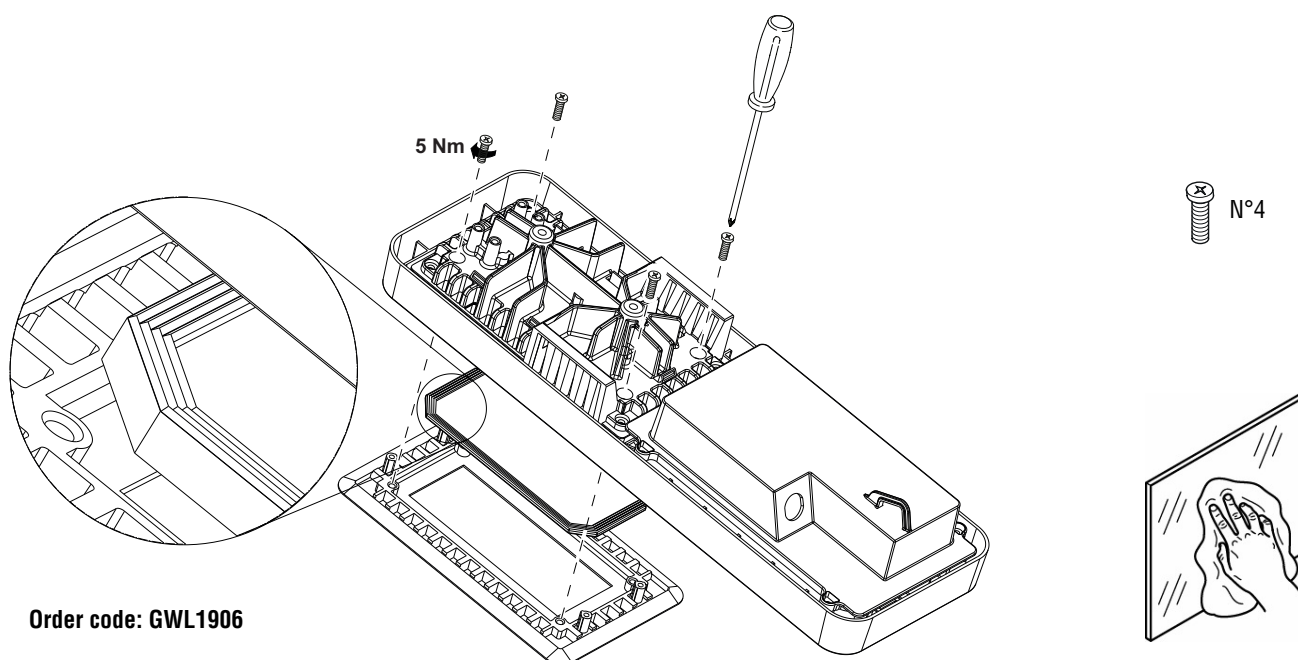

Order code: GWL1906


SMART [4] 4L / 4+4L / 5L / 5+5L / 4x4L / 4x5L

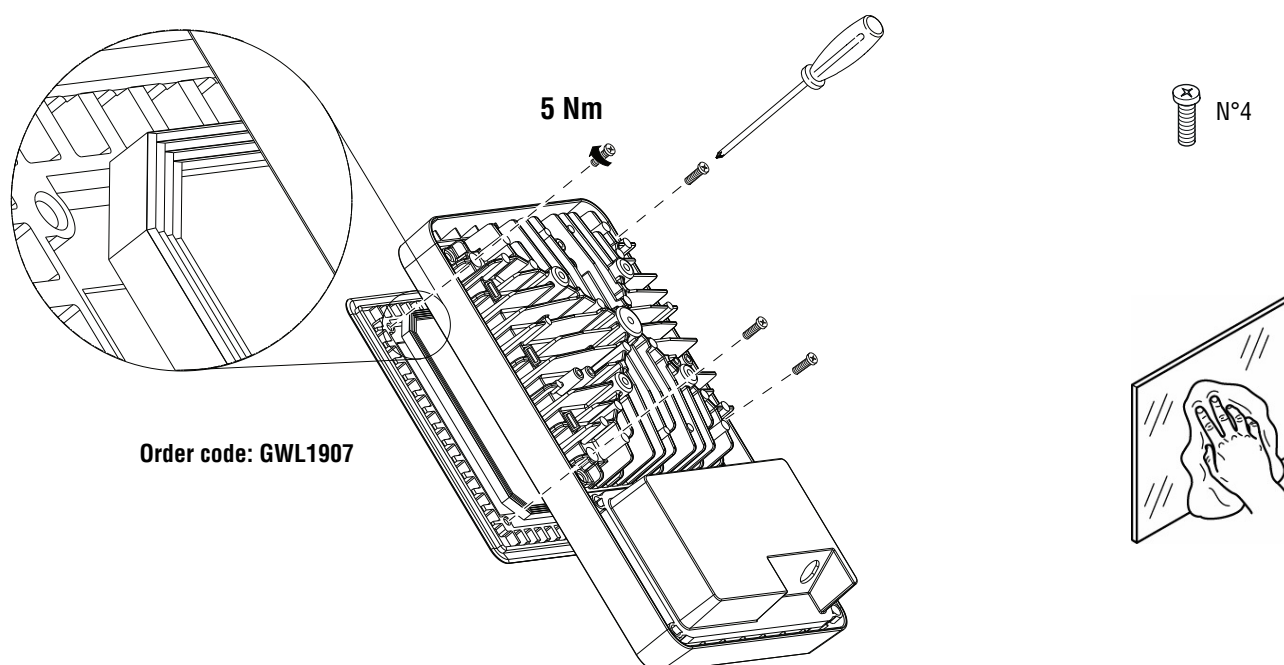




Order code: GWL1907




SMART [4] 2L





GWL1921

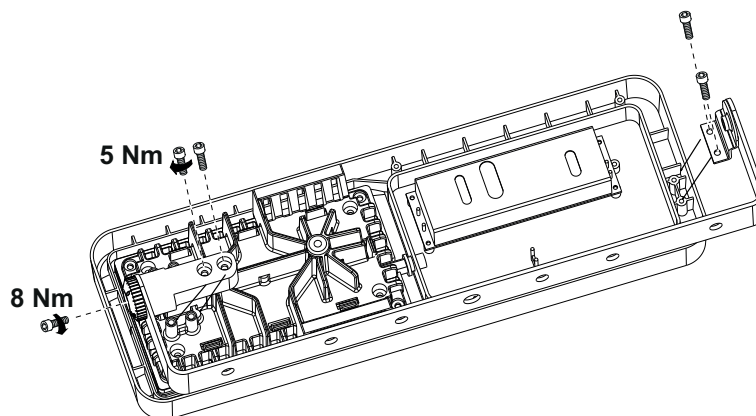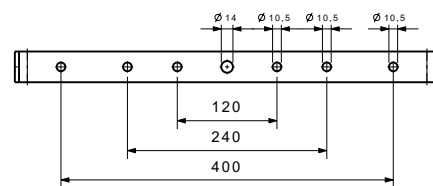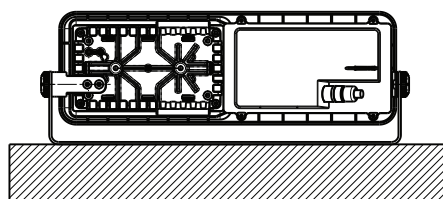


SMART [4] 2+2L





GWL1922

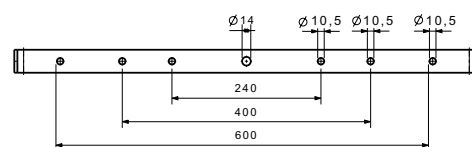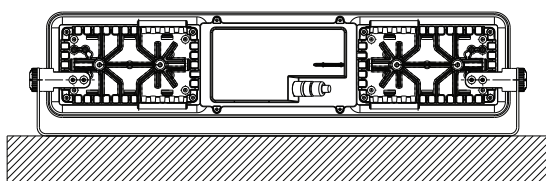


SMART [4] 4L / 5L





GWL1923








SMART [4] 4+4L / 5+5L




GWL1924

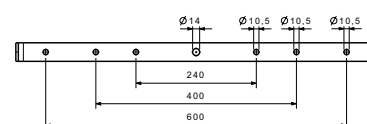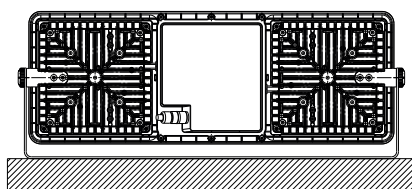


SMART [4] 4x4L / 4x5L

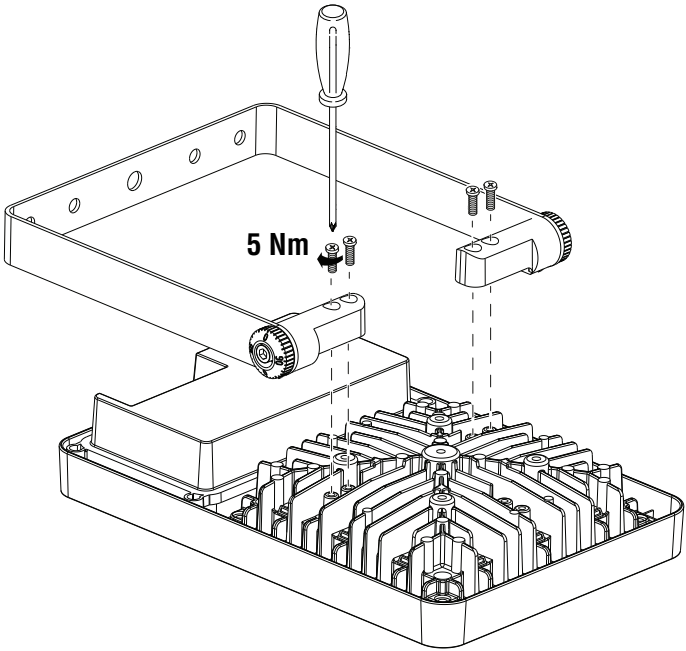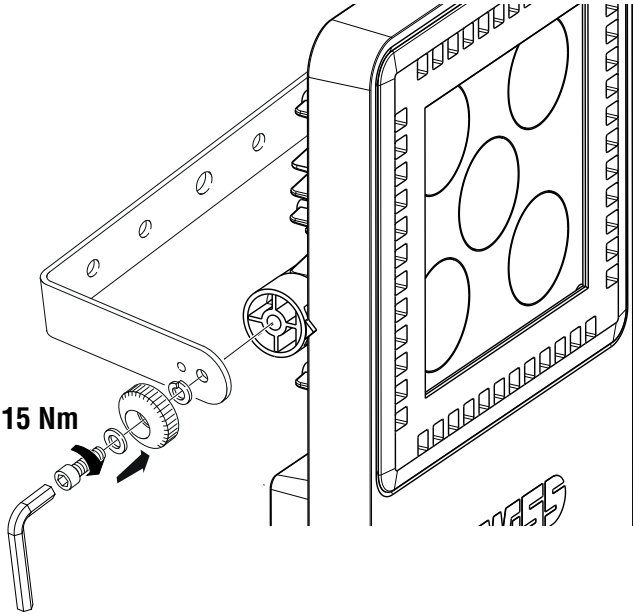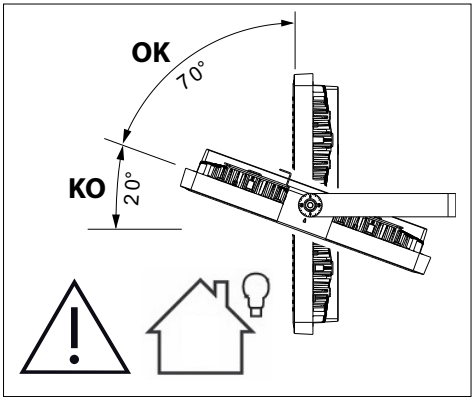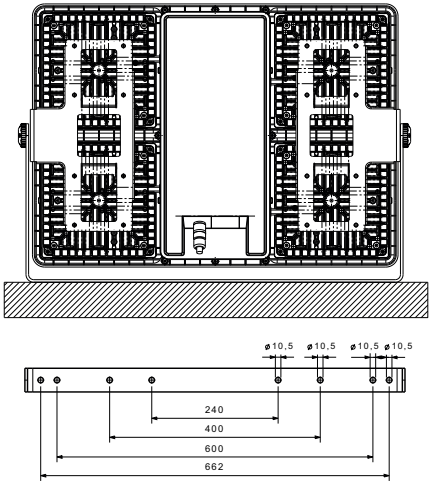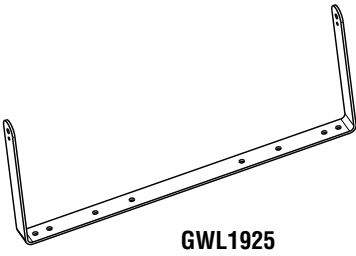


SMART [4] 2L

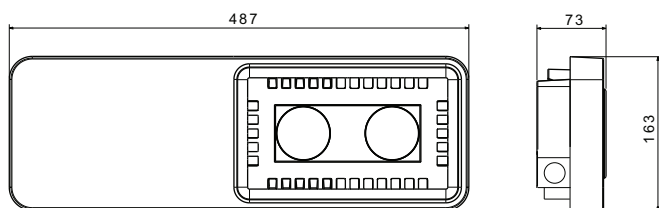


SMART [4] 2+2L

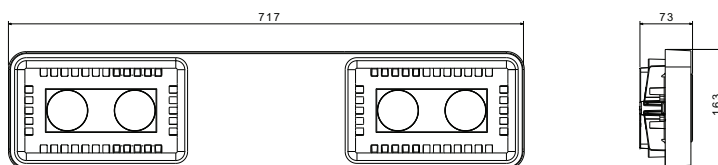


SMART [4] 4L/5L

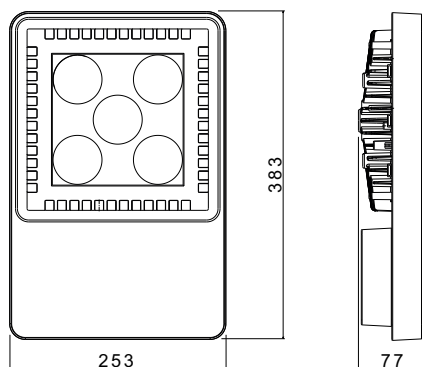

SMART [4] 4+4L - 5+5L

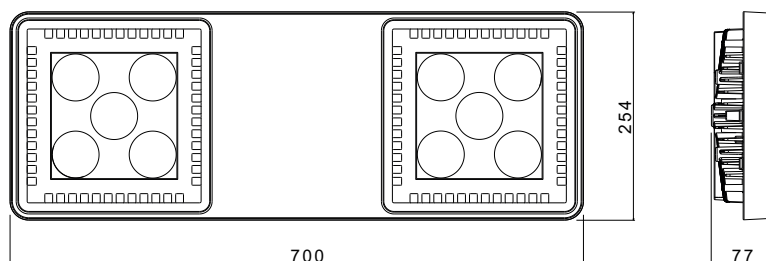

SMART [4] 4x4L - 4x5L

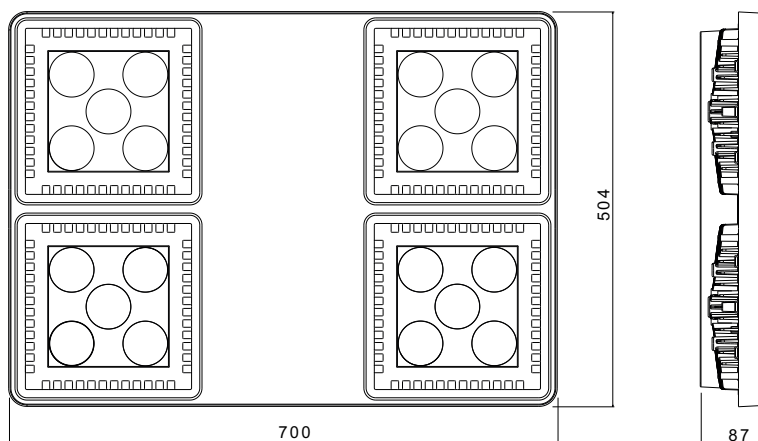

Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:
Contact details according to the relevant European Directives and Regulations:

GEWISS S.p.A. Via A.Volta, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com



+39 035 946 111

8.30 - 12.30 / 14.00 - 18.00
 lunedì ÷ venerdì - monday ÷ friday



+39 035 946 260



sat@gewiss.com
www.gewiss.com