


CE

IP66
IP69


+35°C
-20°C

t_a



+35°C

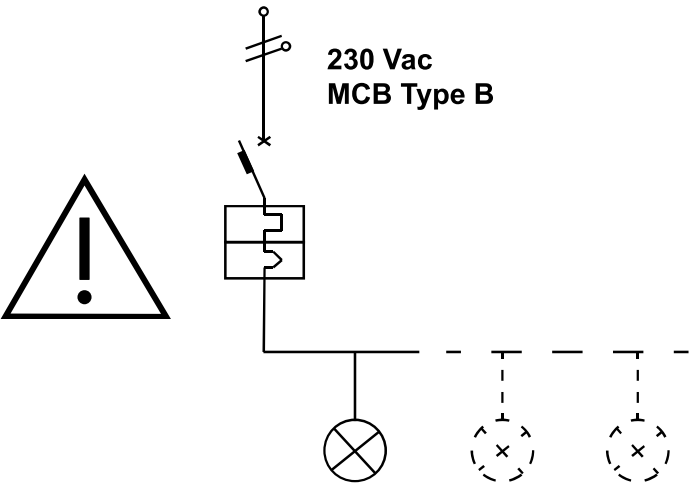


MCB current	10 A	16 A	20 A
max no. SMART [3]:	13	24	30

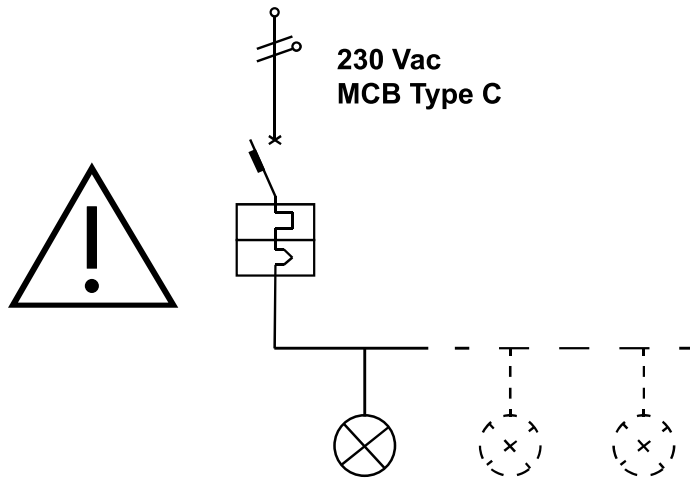


MCB current	10 A	16 A	20 A
max no. SMART [3]:	25	40	50

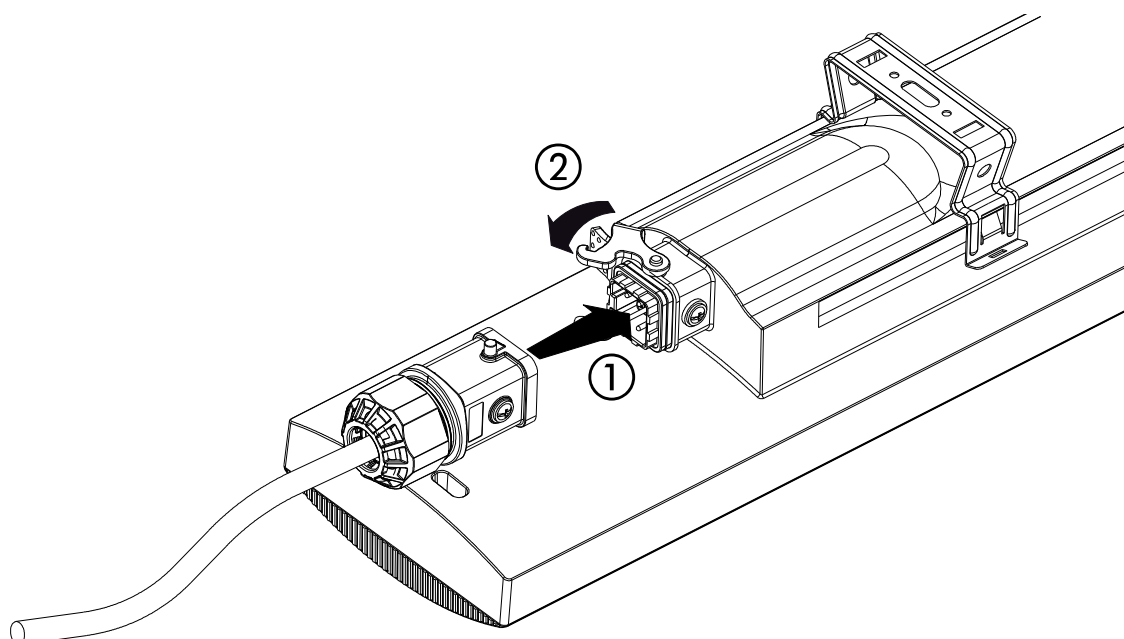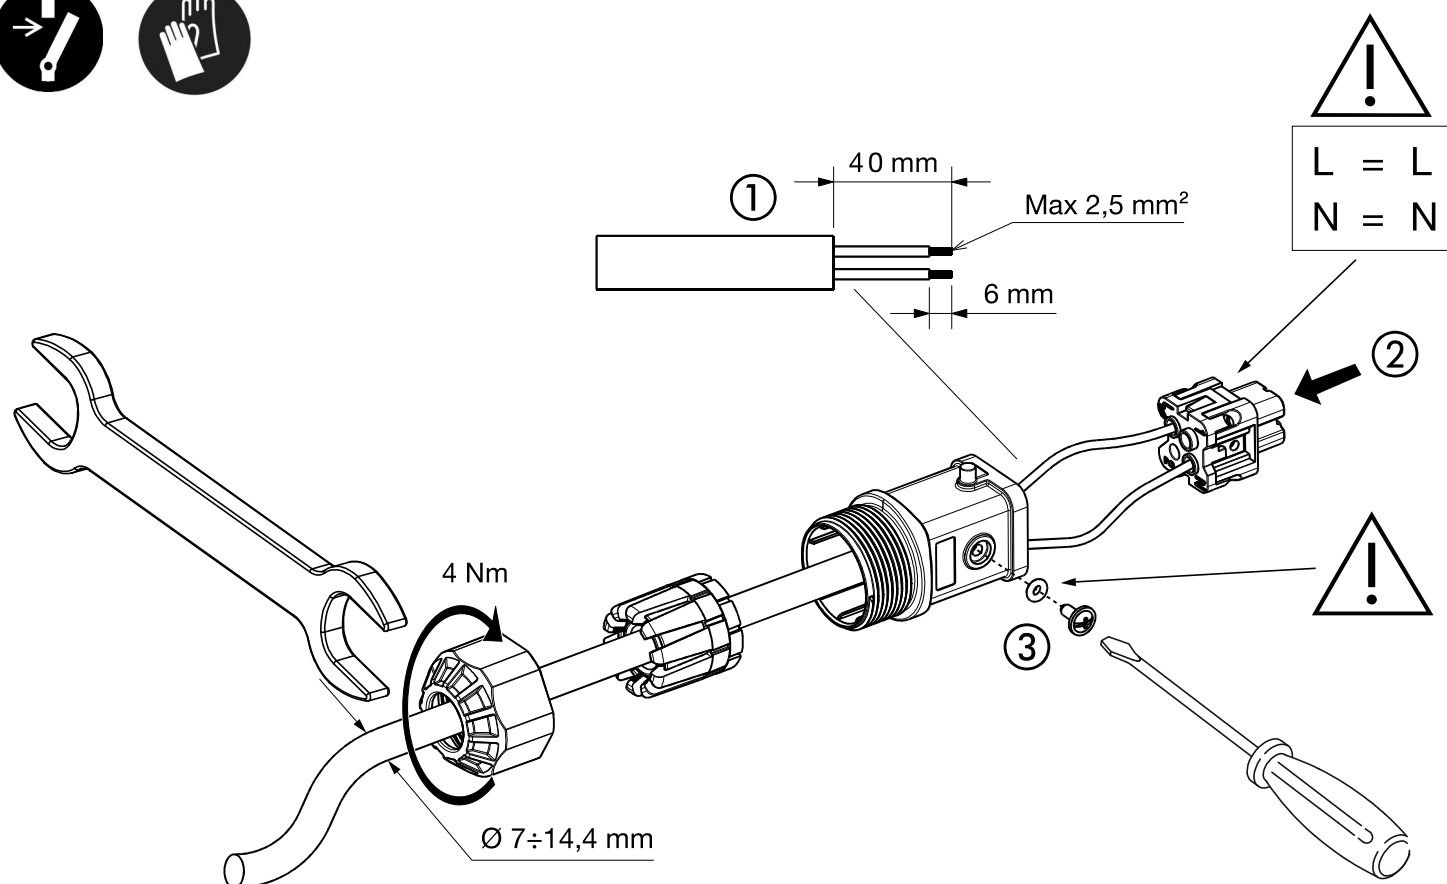


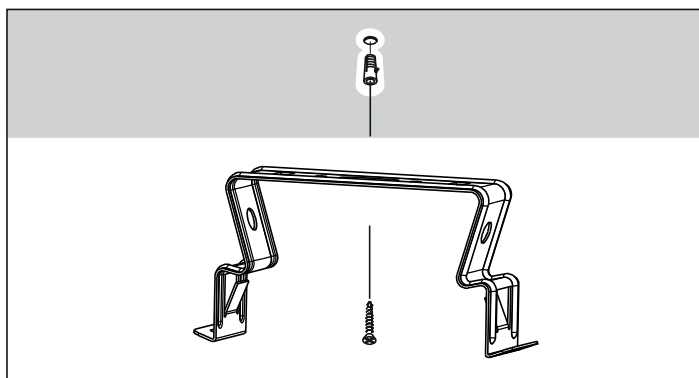


①

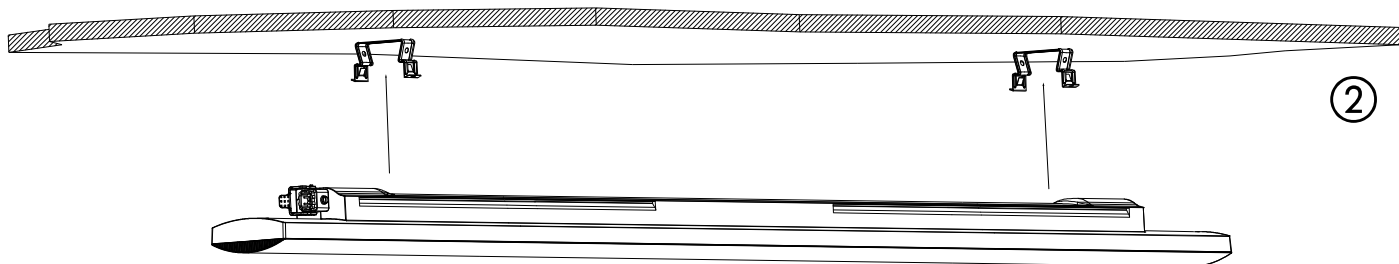

②




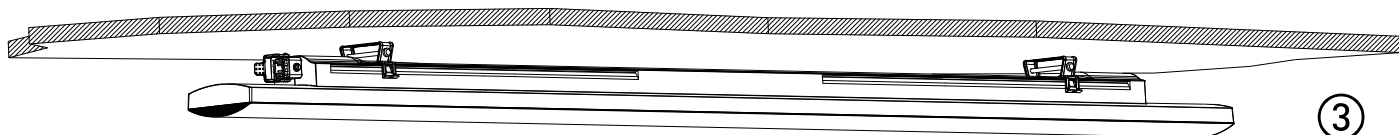



③





④

1,5 Nm

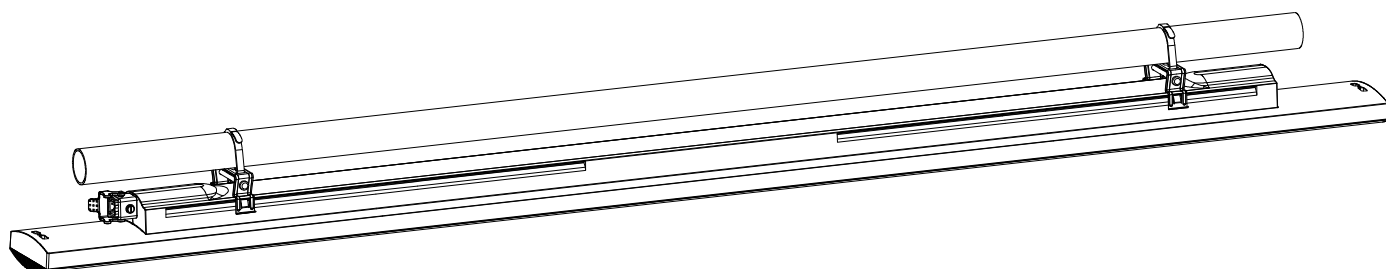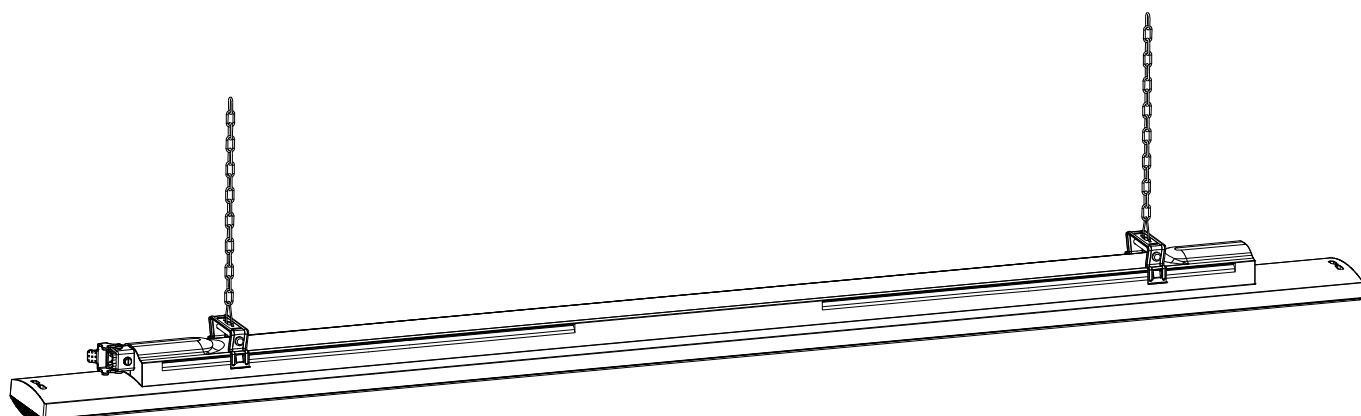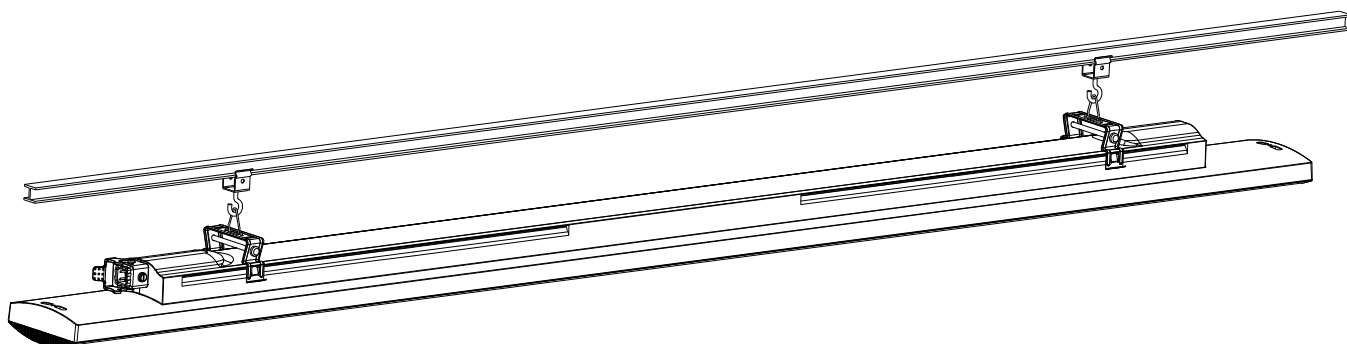


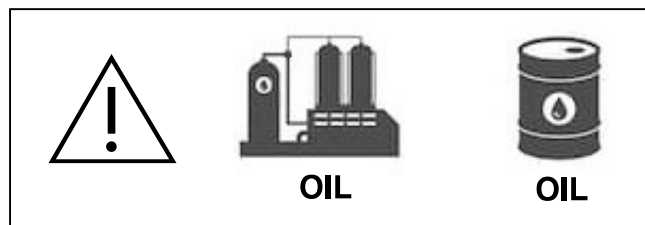


OK! ✓

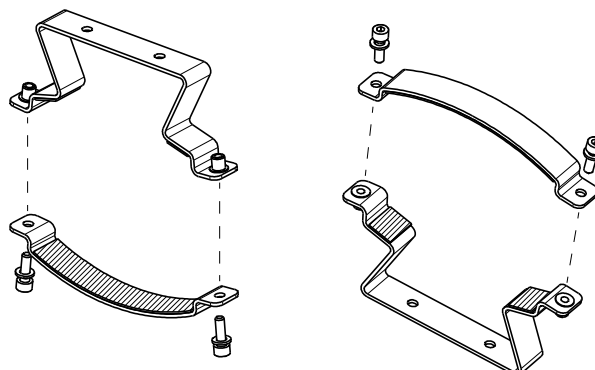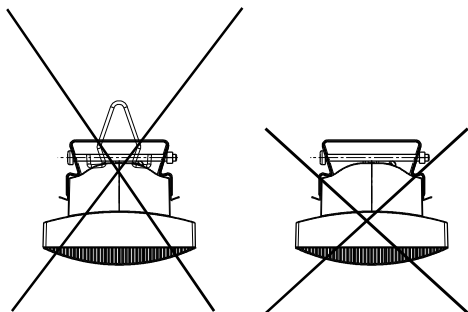


GWS3296

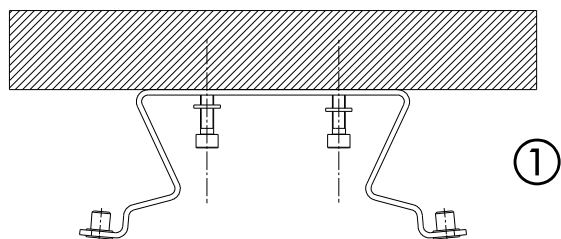


①

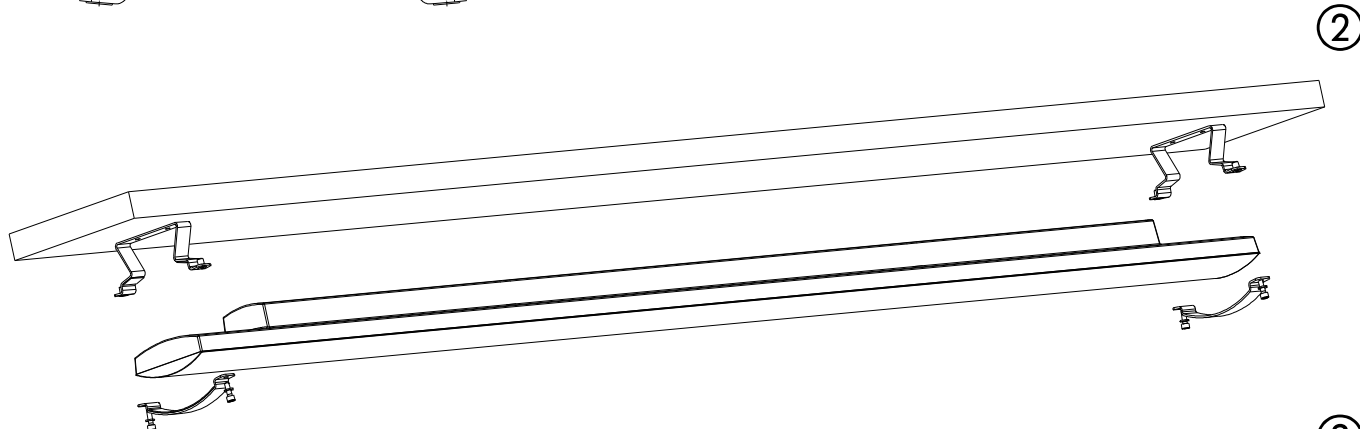

②



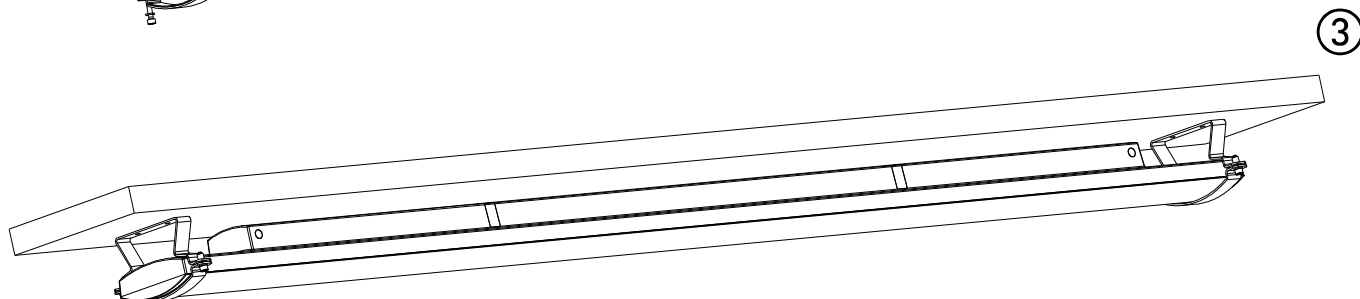


③

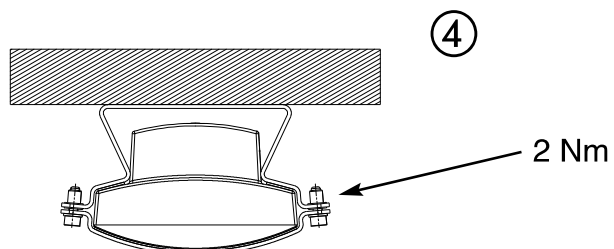


④


2 Nm

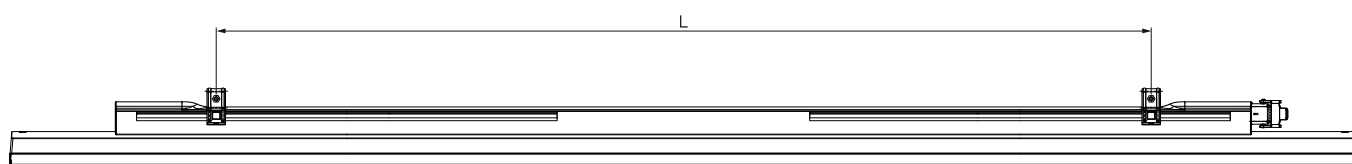
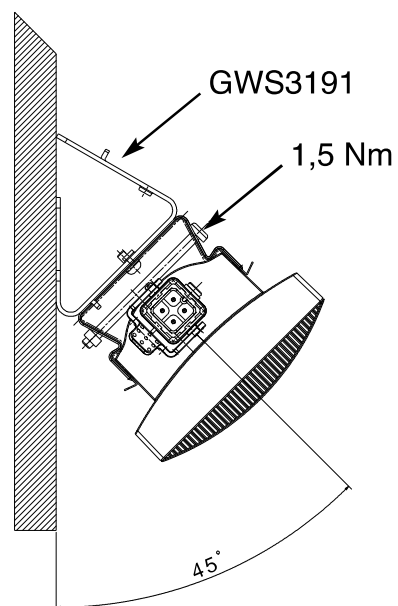
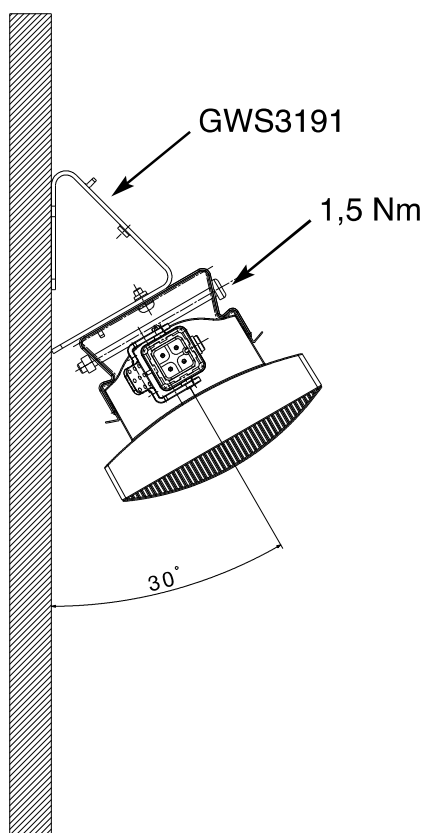


	L
SMART [3] 1600	500÷1270 mm

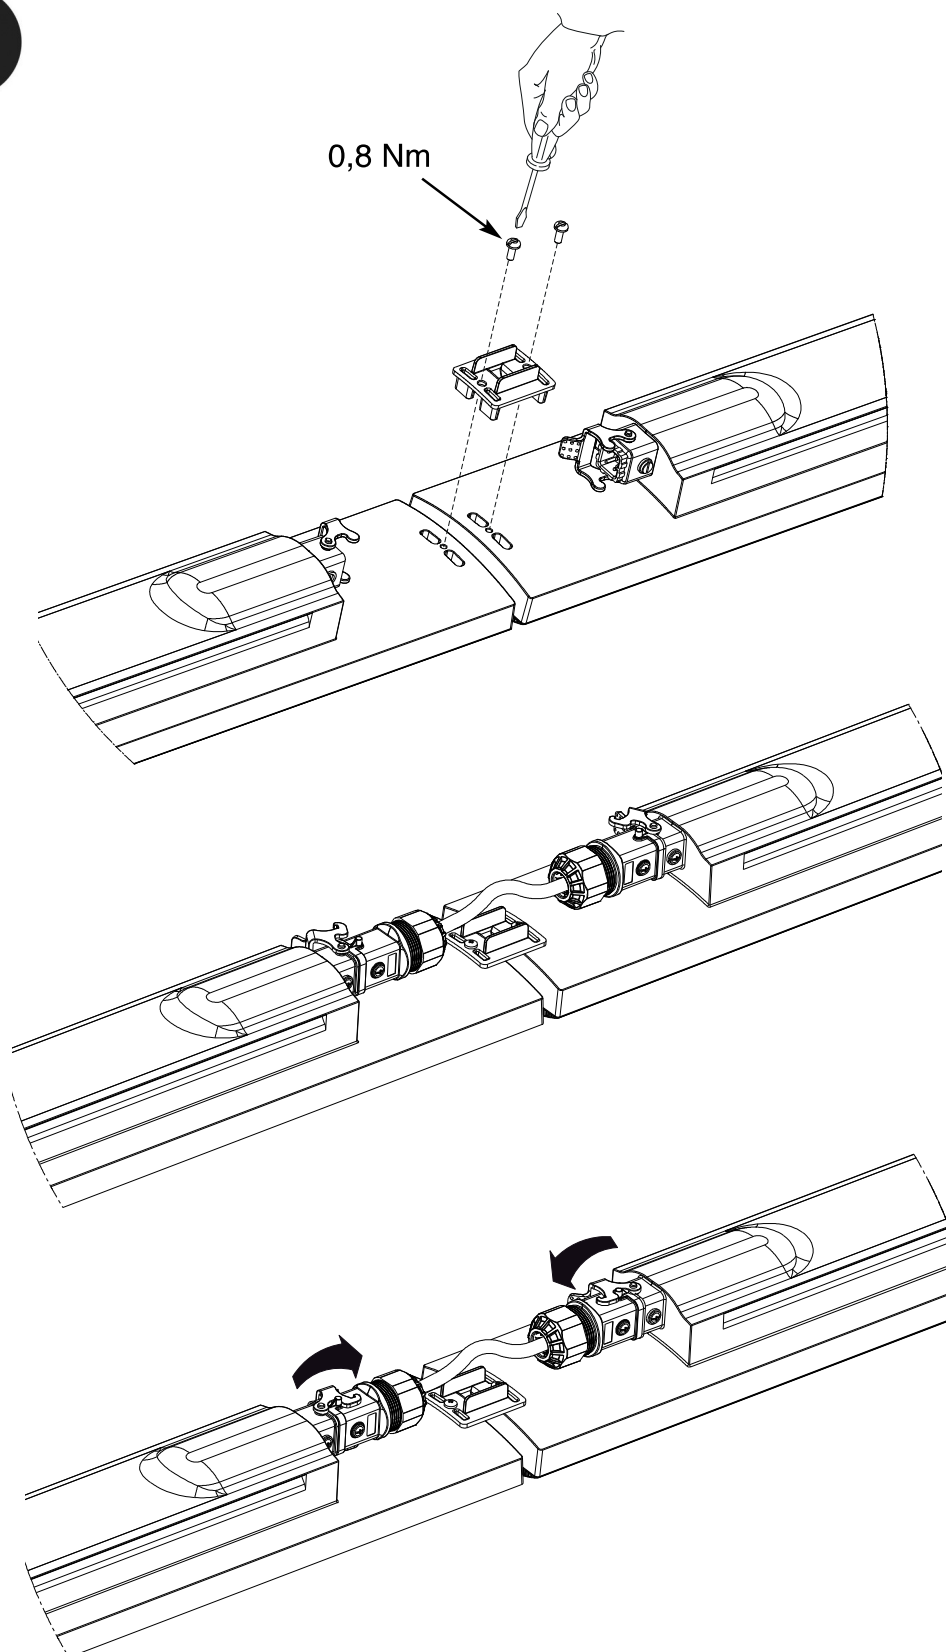

MAX 25 SMART [3]



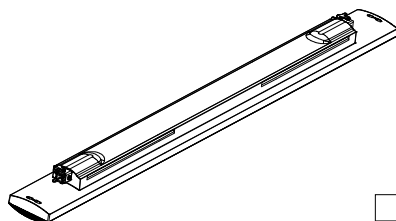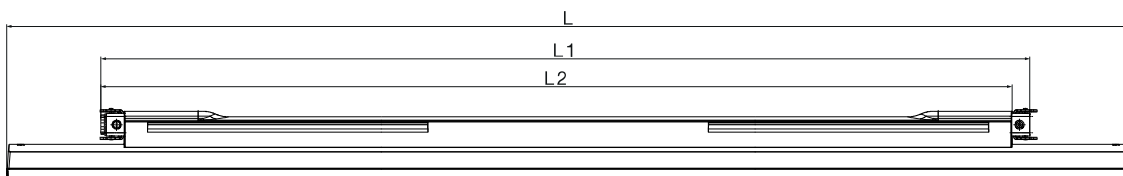



	L	L1	L2
SMART [3] 1600	1600	//	1370
SMART [3] 1600 LP	1600	1390	//



GWS3296

GWS3192

GWS3191

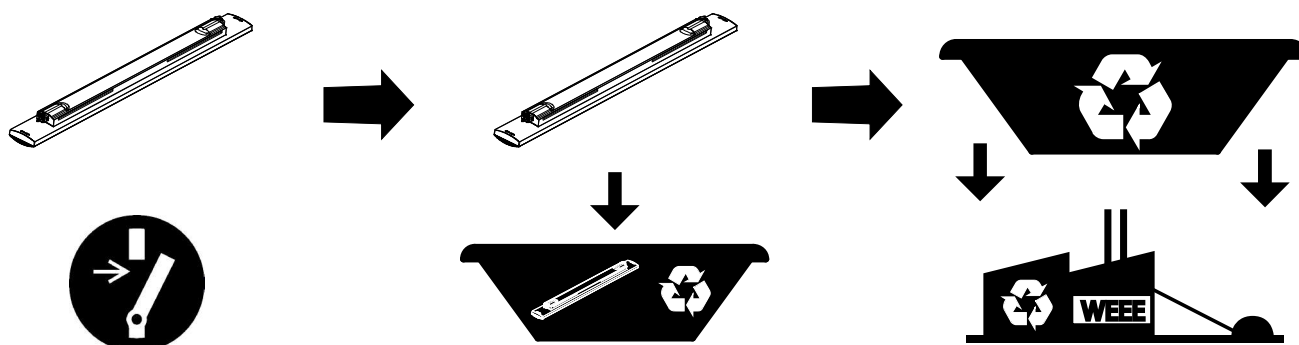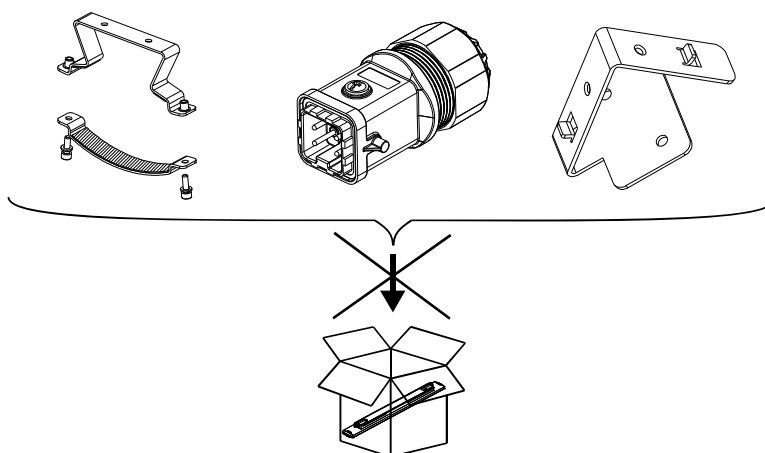

Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:

Contact details according to the relevant European Directives and Regulations:

GEWISS S.p.A. Via A.Volta, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com



+39 035 946 111
8.30 - 12.30 / 14.00 - 18.00
lunedì ÷ venerdì - monday ÷ friday



+39 035 946 260



sat@gewiss.com
www.gewiss.com