

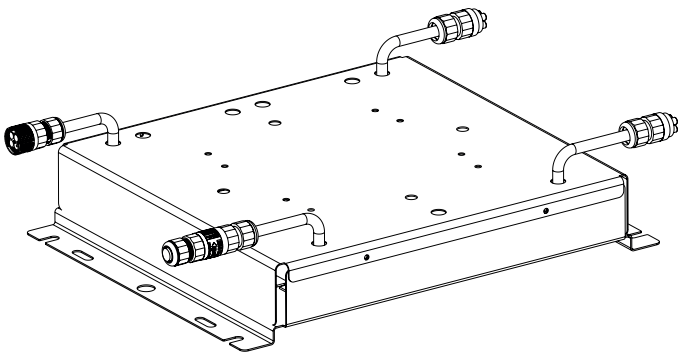



IP66

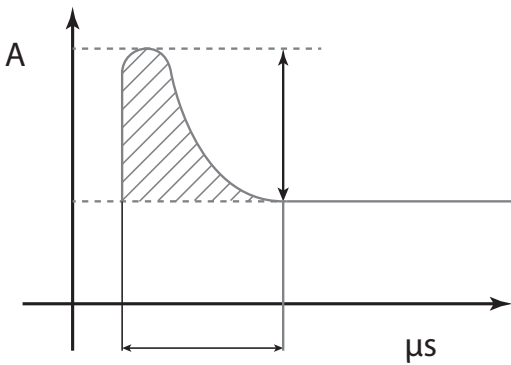


		P ^(*)	V	I	<i>t</i> _a
GWP2901	6,2	Max. 660 W	220-240 V 50/60 Hz	Max. 0,7 A	50°C




	I _{LED}	LED driver Inrush Current Peak and Width
1-10V	Max. 700 mA	2x60A / 400μs


MCB Type C:	10A	16A	20A
	-	1	2
MCB Type D:	10A	16A	20A
	2	4	6

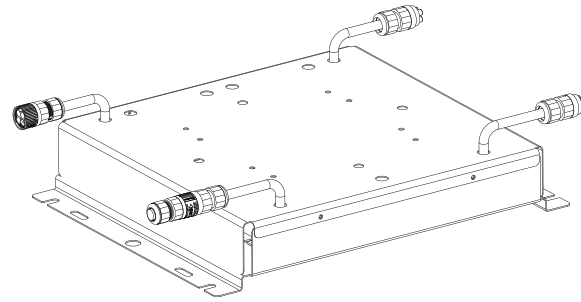

1 = L
3 = N
4 = $\oplus$




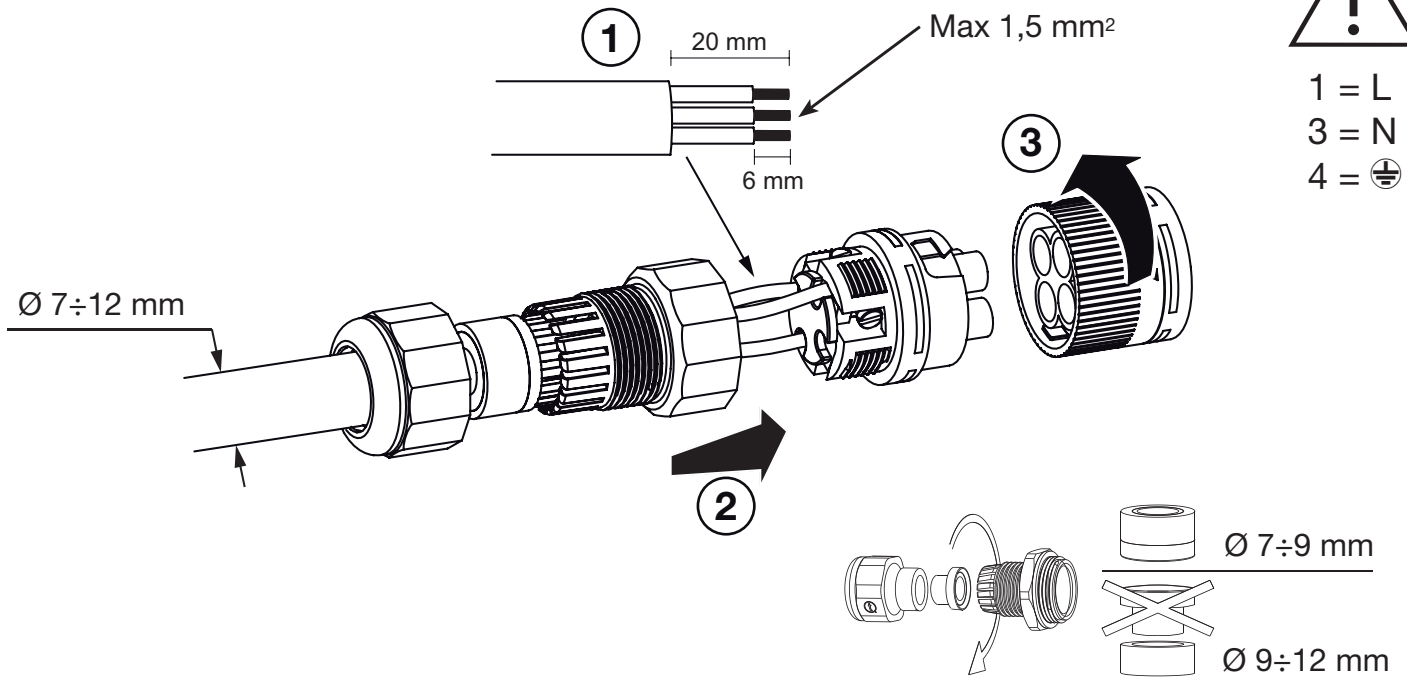




SOCKET 3P





1	→	1
3	→	3
4	→	4

PLUG 3P

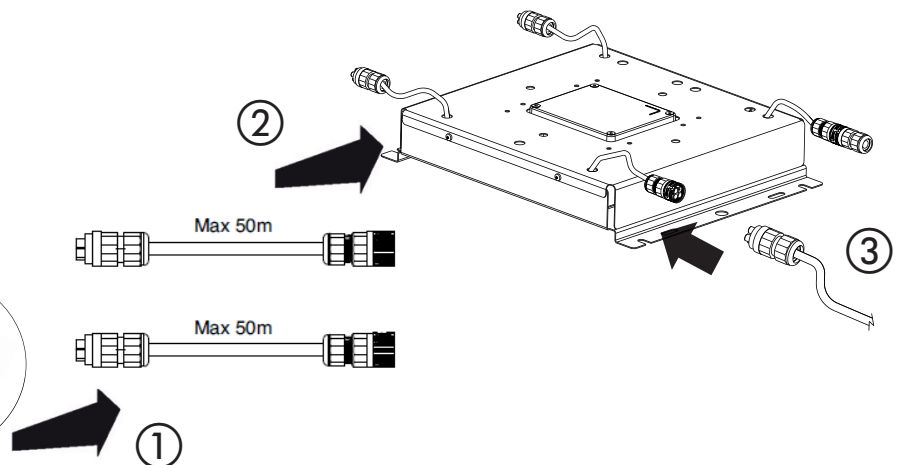


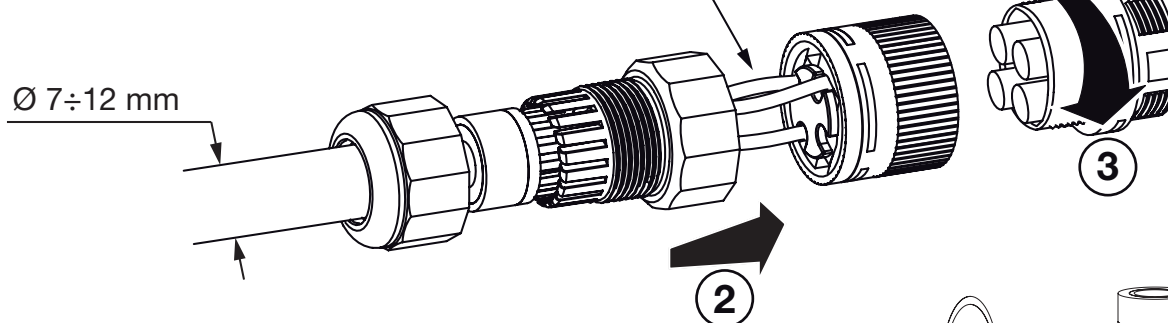
$$\begin{aligned} 1 &= + \\ 3 &= - \\ 4 &= \oplus \end{aligned}$$




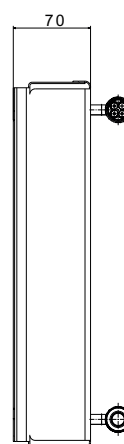
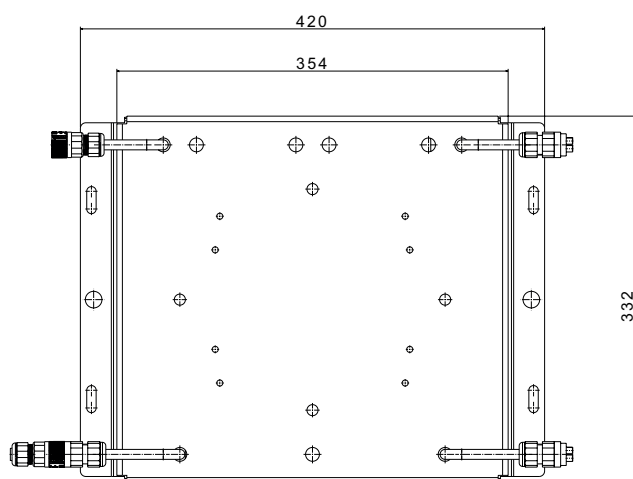
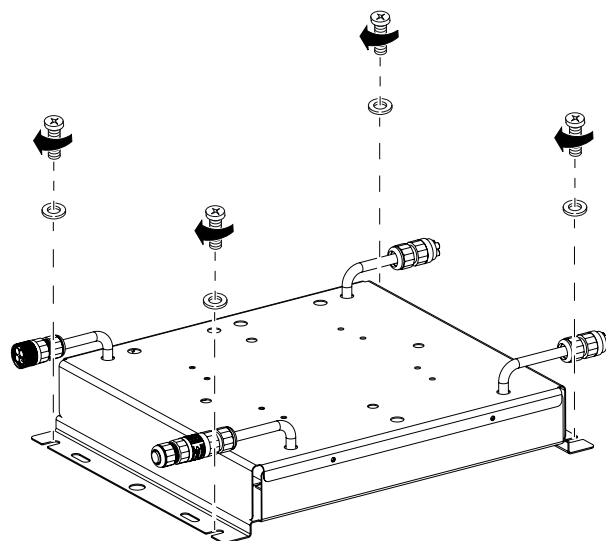
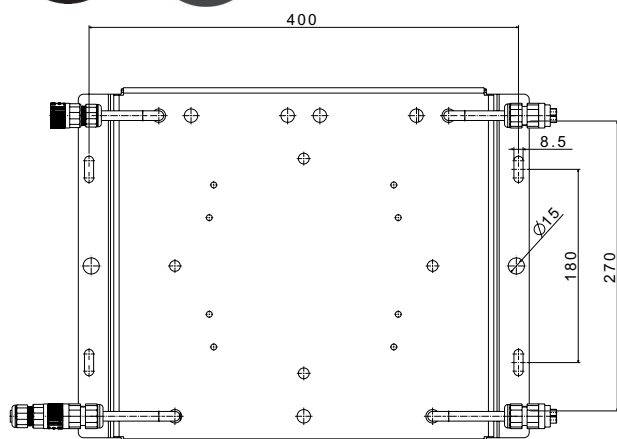
Ø 9÷12 mm

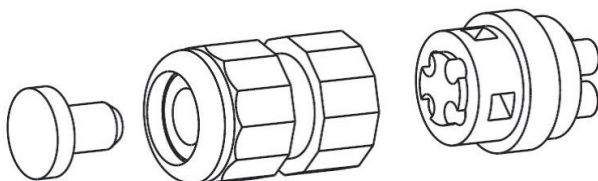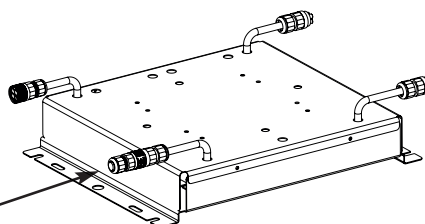

DIM +	DIM -
1 - 10V	1 - 10V



Ø 9÷12 mm



Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:

Contact details according to the relevant European Directives and Regulations:

GEWISS S.p.A. Via A.Volta, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com



+39 035 946 111

8.30 - 12.30 / 14.00 - 18.00
lunedì ÷ venerdì - monday ÷ friday



+39 035 946 260



sat@gewiss.com
www.gewiss.com