


ELIA FL

GEWISS

FLOODLIGHT LED



CE

IP66


RG1→0,2m

+50°C


-30°C

t_a +50°C


					V
	ON-OFF	Max 6,3	0.03 m²	0.15 m²	100-240 V 50/60 Hz
	DALI	Max 6,3	0.03 m²	0.15 m²	220-240 V 50/60 Hz

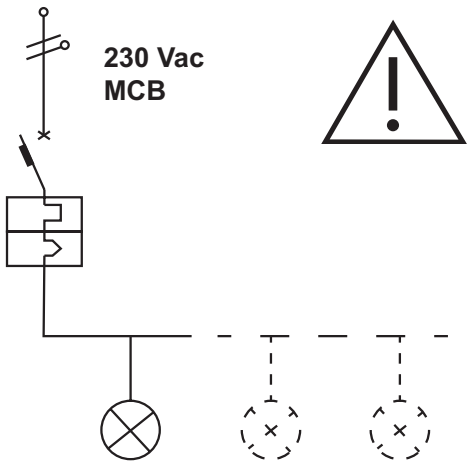

MCB 16A Type C:		
50W	ON-OFF	40
	DALI	16
100W	ON-OFF	6
	DALI	10
150W	ON-OFF	6
	DALI	9
200W	ON-OFF	6
	DALI	6

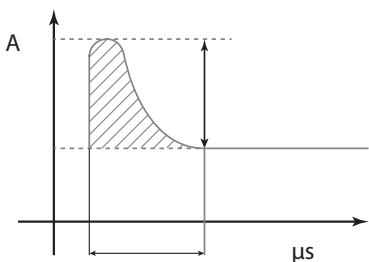





Inrush current peak and width:		
50W	ON-OFF	45A / 100µs
100W	ON-OFF	70A / 200µs
	DALI	60A / 850µs
150W	ON-OFF	110A / 200µs
	DALI	65A / 550µs
200W	ON-OFF	120A / 200µs
	DALI	60A / 510µs

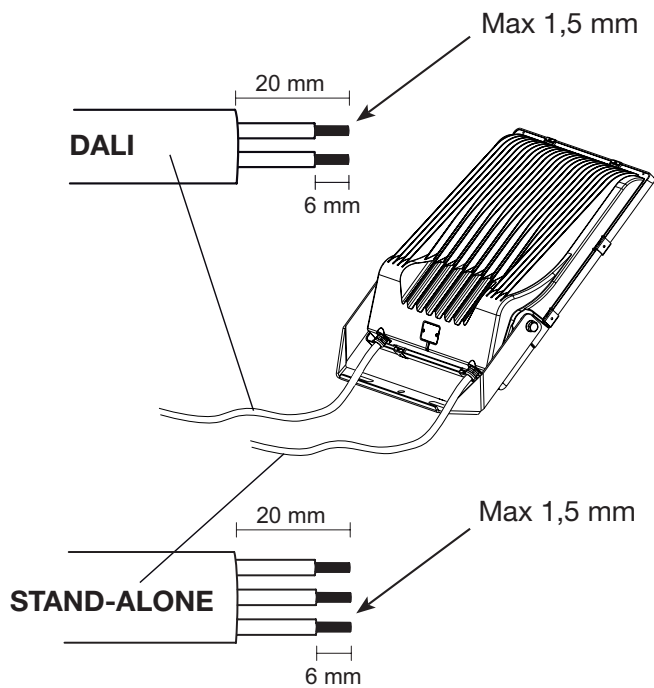


L
N
+
DALI 1
DALI 2



	DALI	STAND-ALONE
50W	✗	✓
100W	✓	✓
150W	✓	✓
200W	✓	✓

L
N

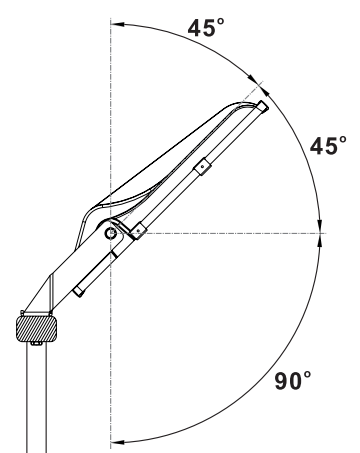

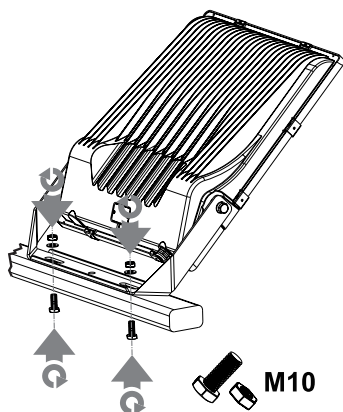
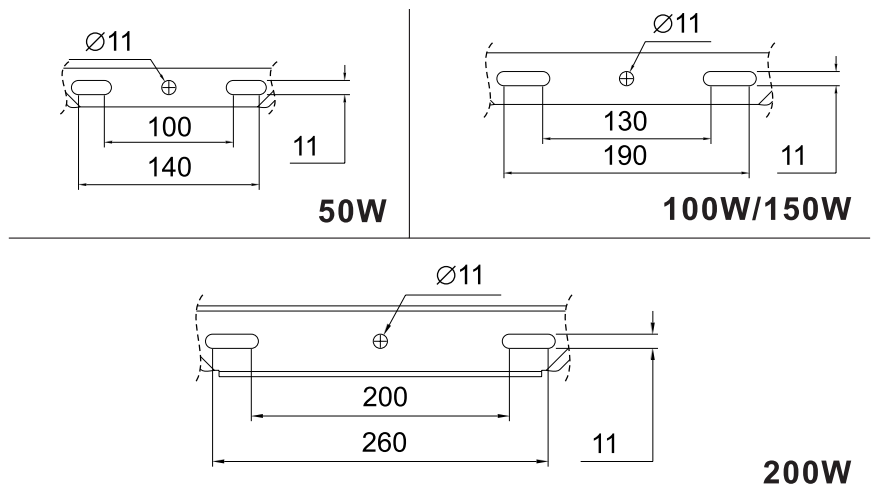





GW F1 901




M10

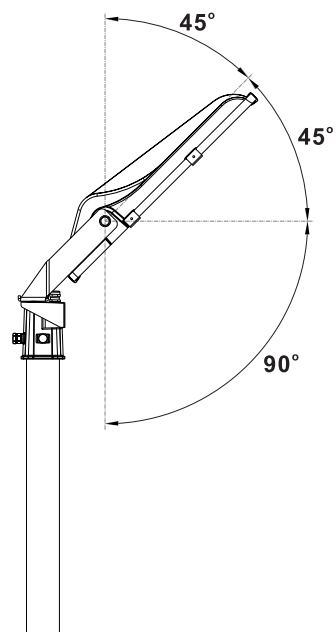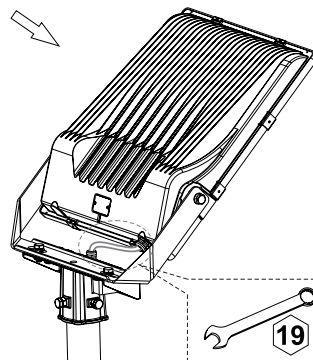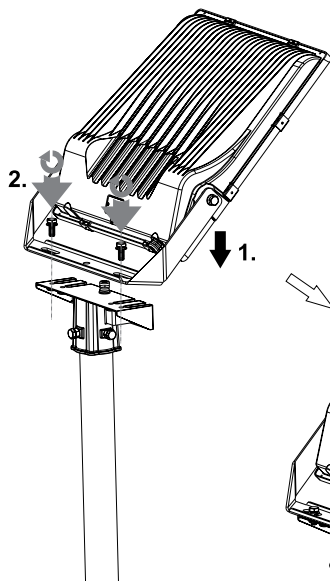


S2




M2


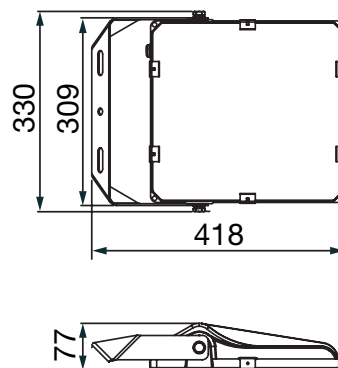


L2

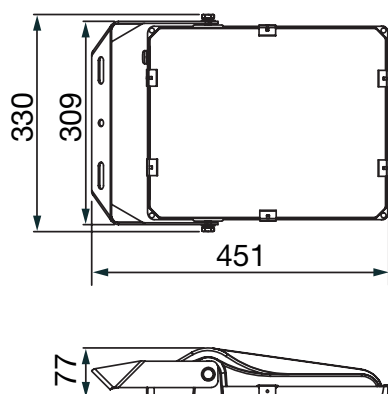

XL2

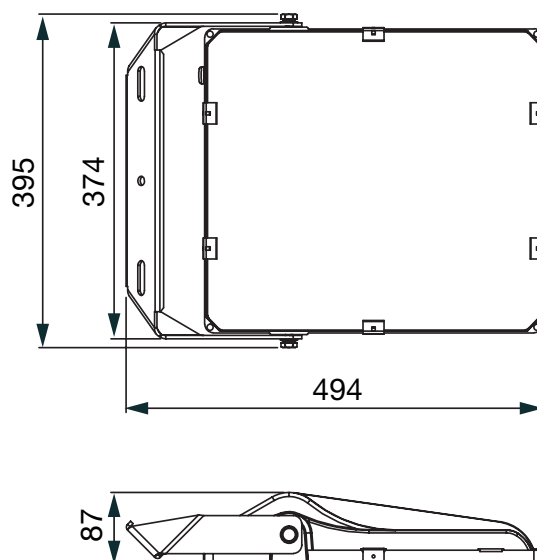

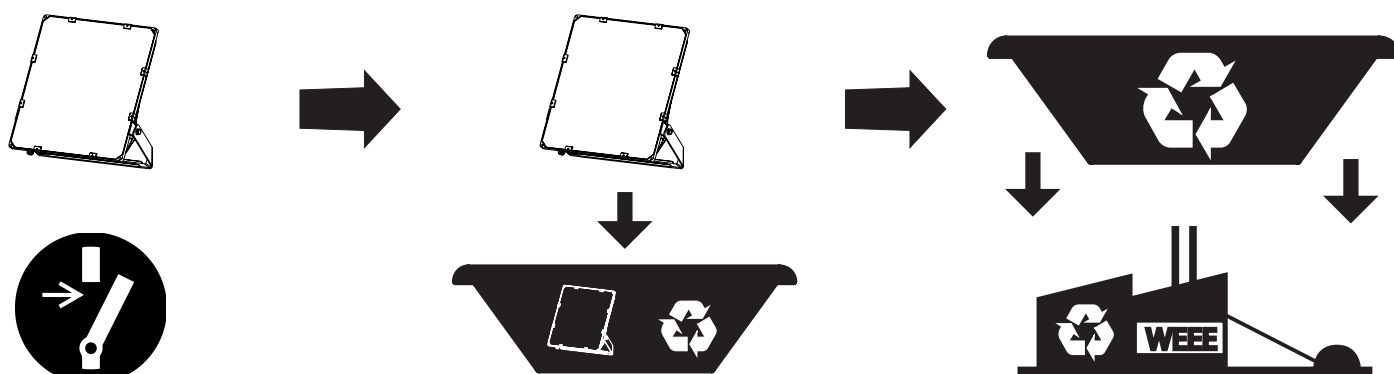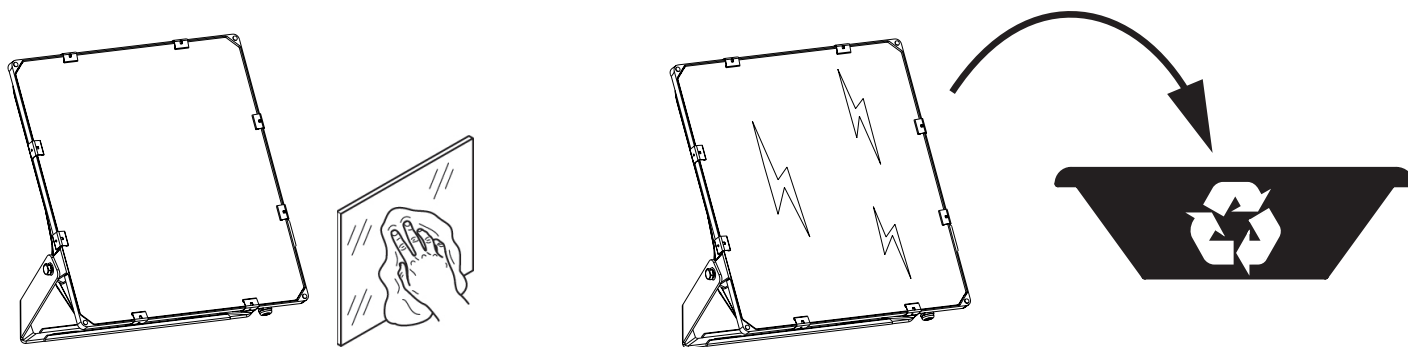

Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:
Contact details according to the relevant European Directives and Regulations:

GEWISS S.p.A. Via A.Volta, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com



+39 035 946 111
8.30 - 12.30 / 14.00 - 18.00
lunedì ÷ venerdì - monday ÷ friday



+39 035 946 260



sat@gewiss.com
www.gewiss.com