


SMART [3] PLUS DALI


GEWISS




IP66
IP69

$t_{\min} -25^{\circ}\text{C}$



	t_a
SMART [3] 800-1200-1600	+50°C
SMART [3] HLO 1600	+45°C

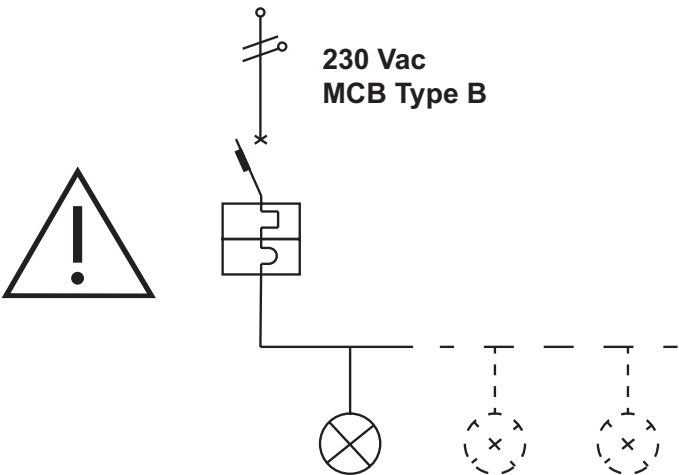


	max no. SMART [3]		
MCB current	10 A	16 A	20 A
SMART [3] 800-1200-1600	18	29	35
SMART [3] HLO 1600	11	18	22

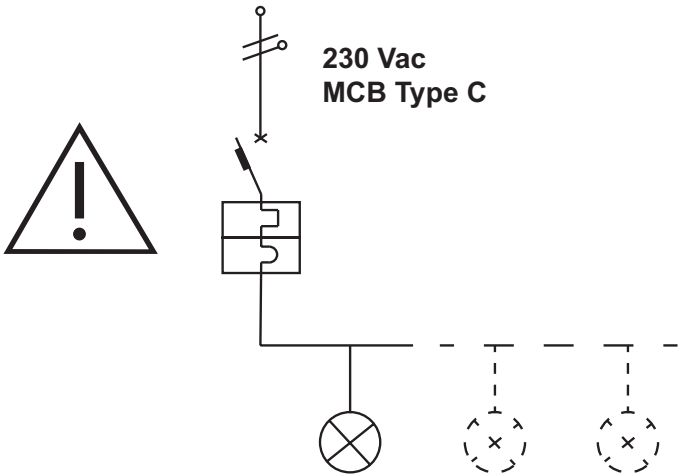


	max no. SMART [3]		
MCB current	10 A	16 A	20 A
SMART [3] 800-1200-1600	30	49	60
SMART [3] HLO 1600	18	30	37

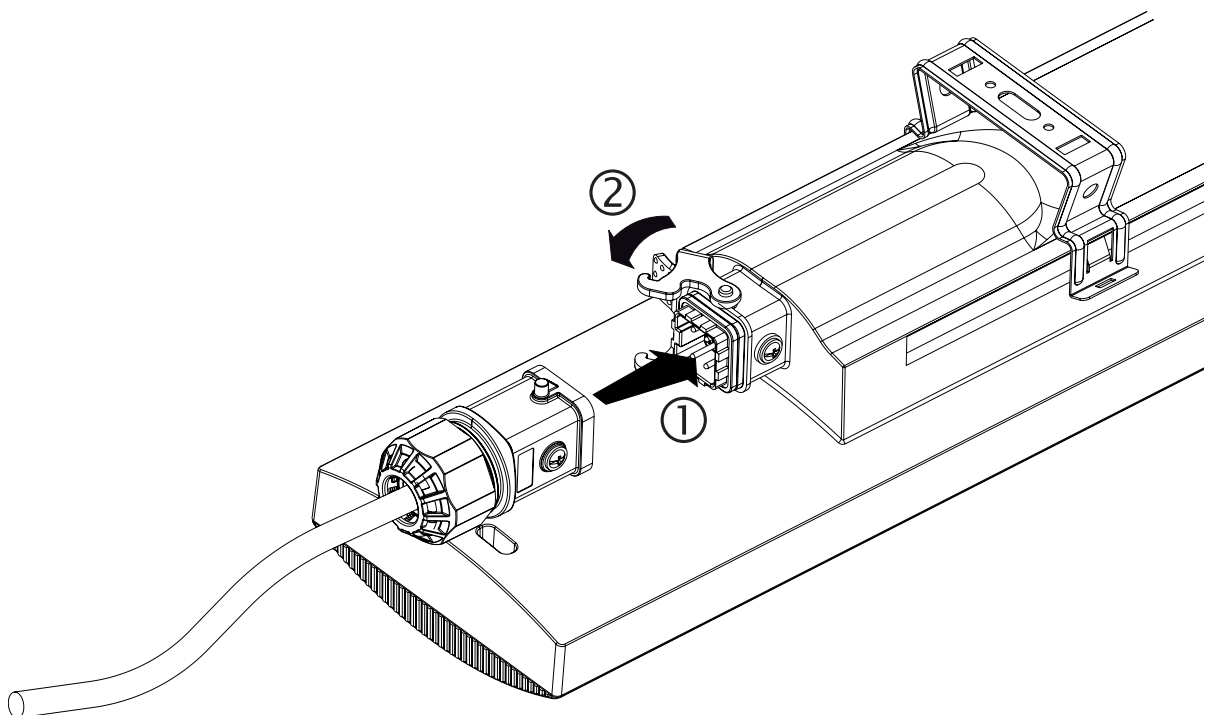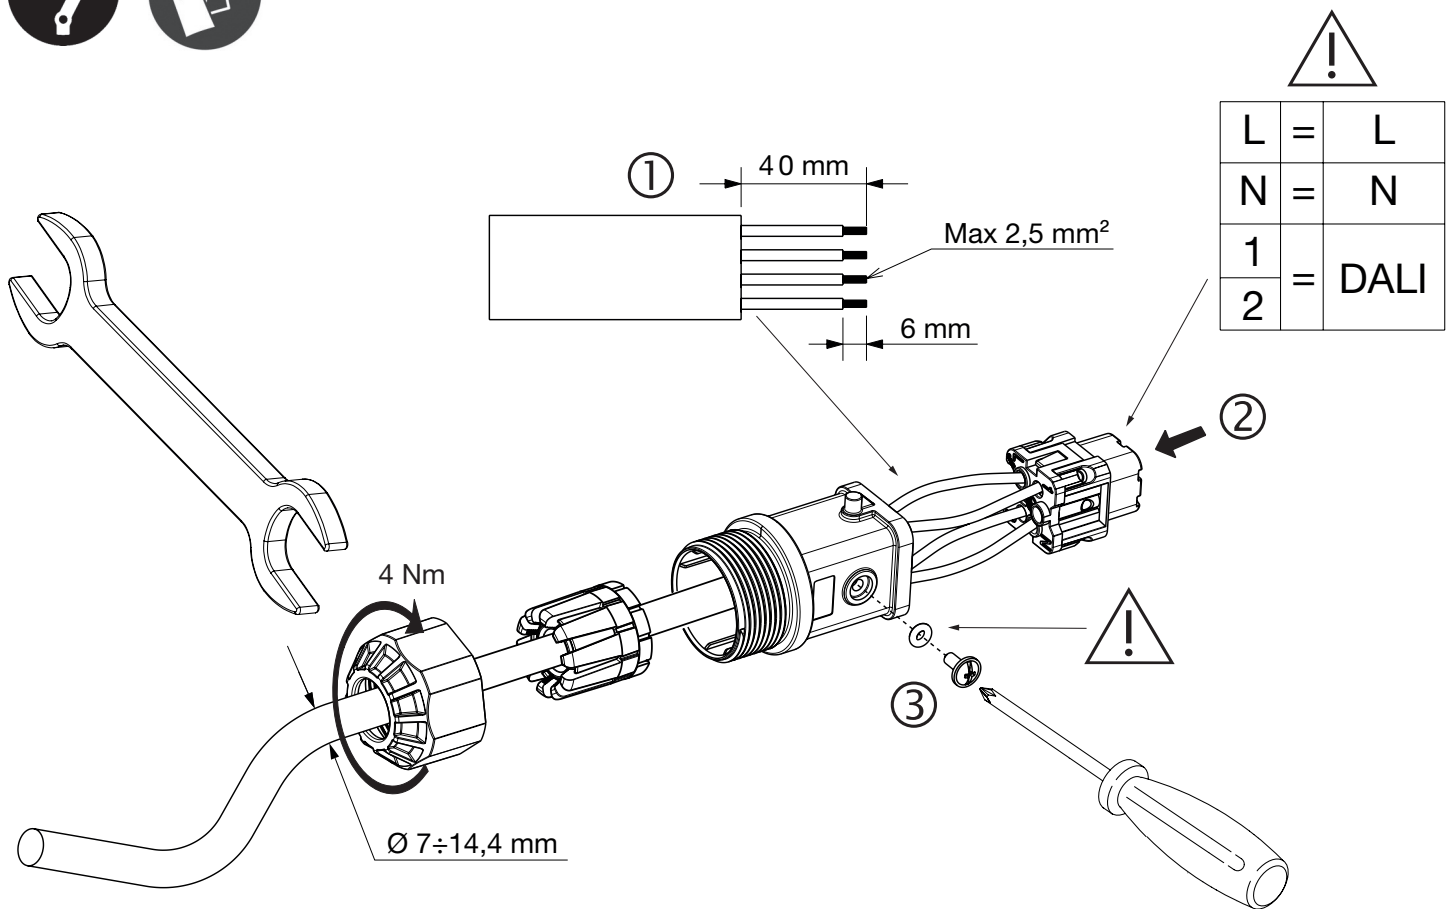


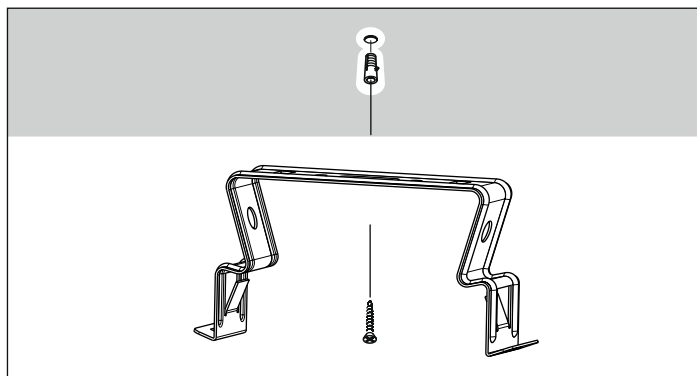


①

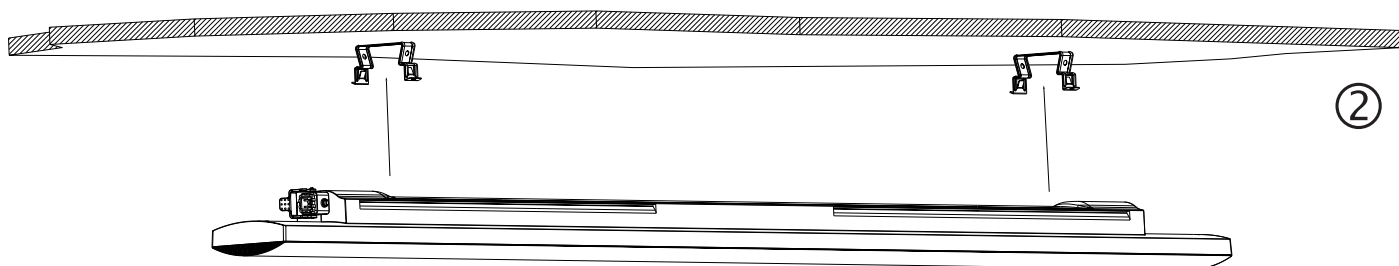

②




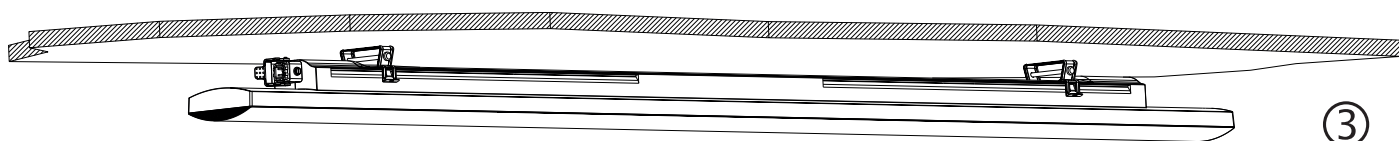



③







1,5 Nm

④

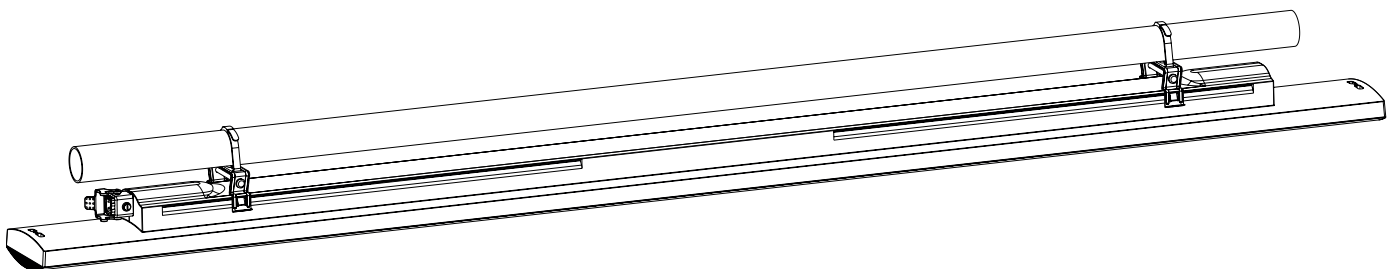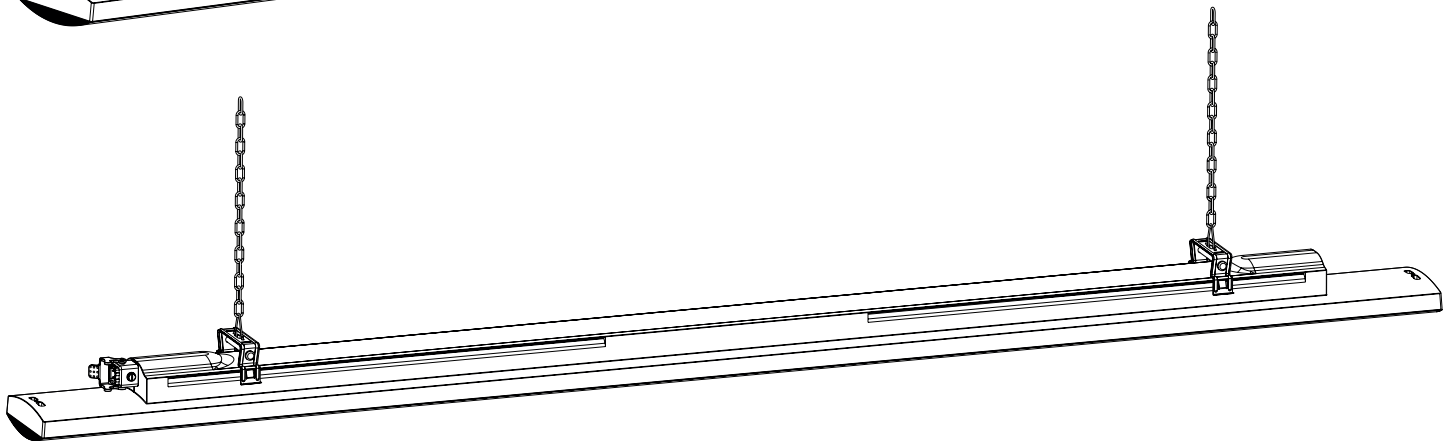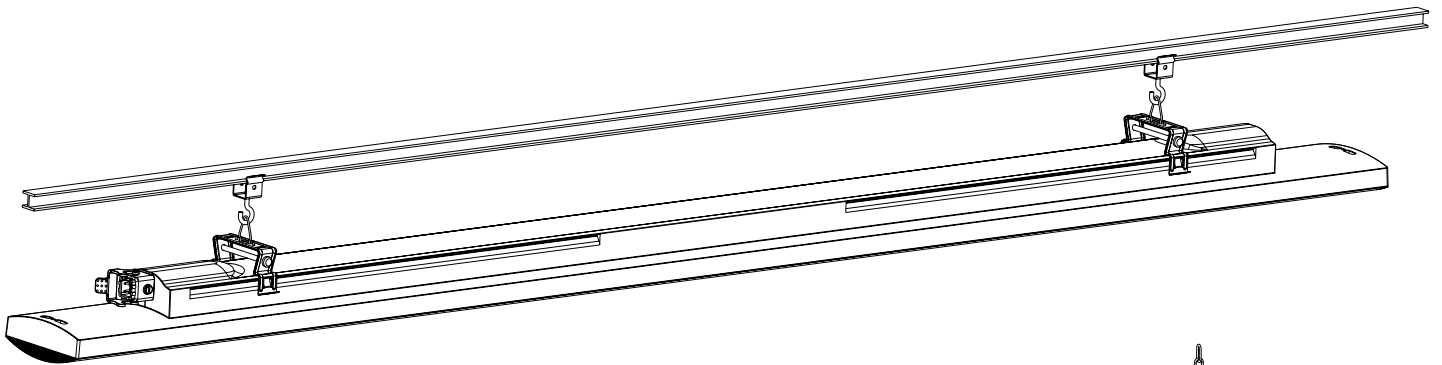


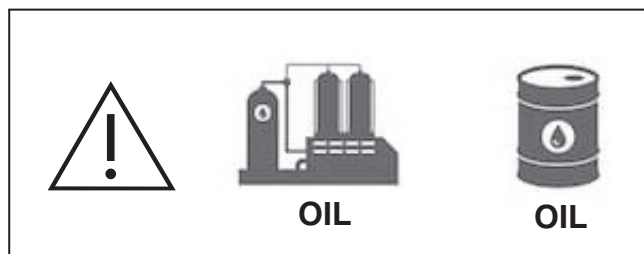


OK! ✓

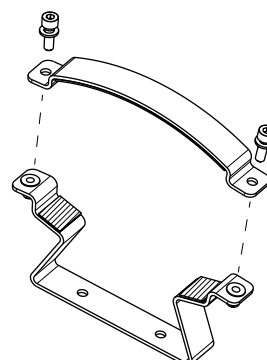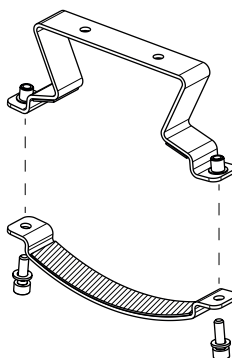


GWS3296

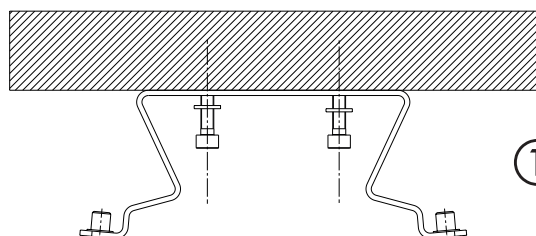


①

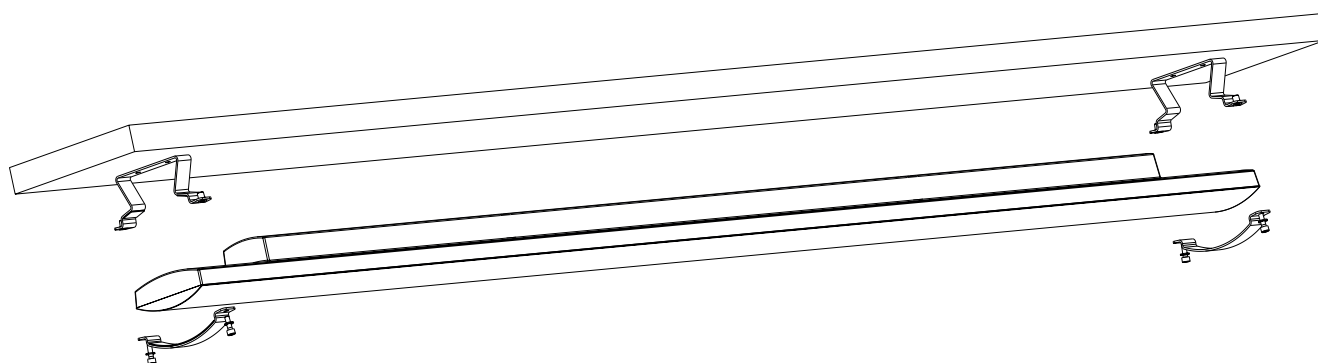

②



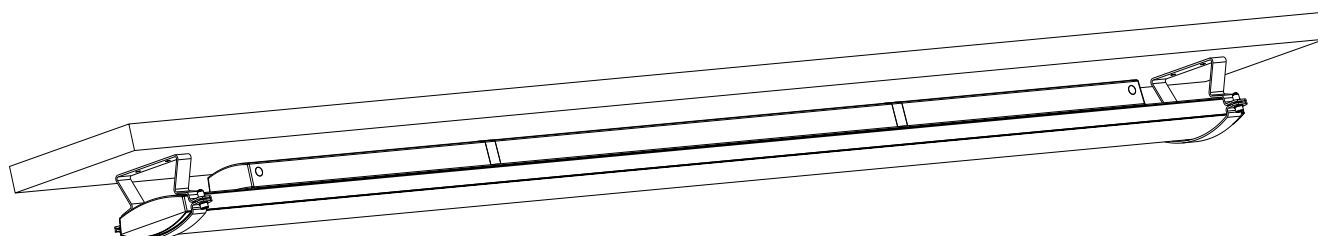


③

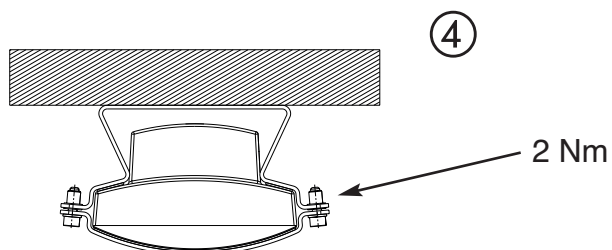


④


2 Nm

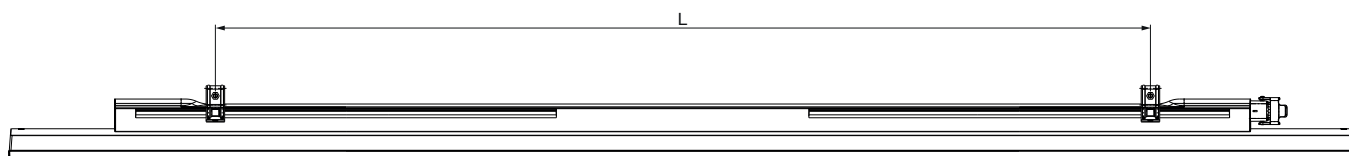
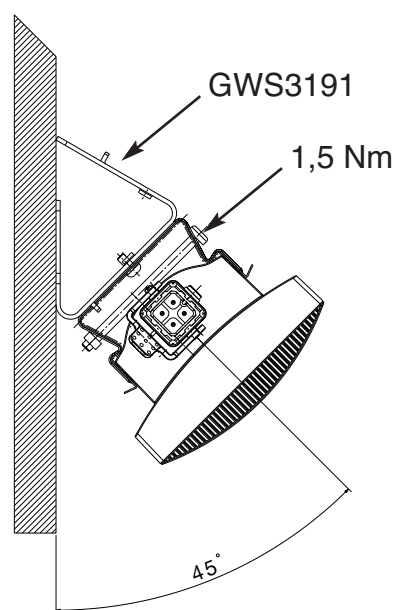
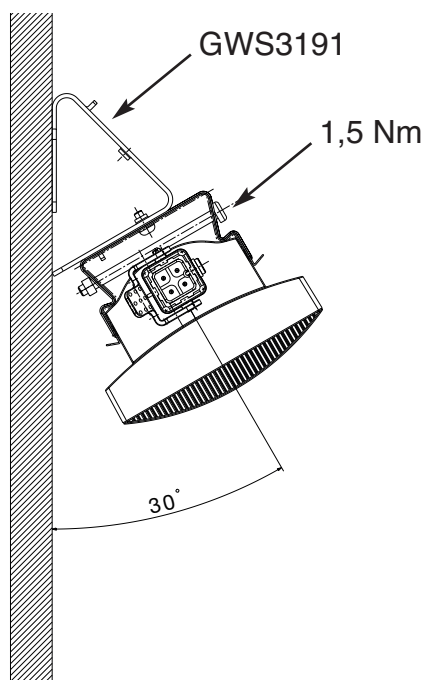


	L
SMART [3] 800	250÷475 mm
SMART [3] 1200	350÷910 mm
SMART [3] 1600	500÷1270 mm






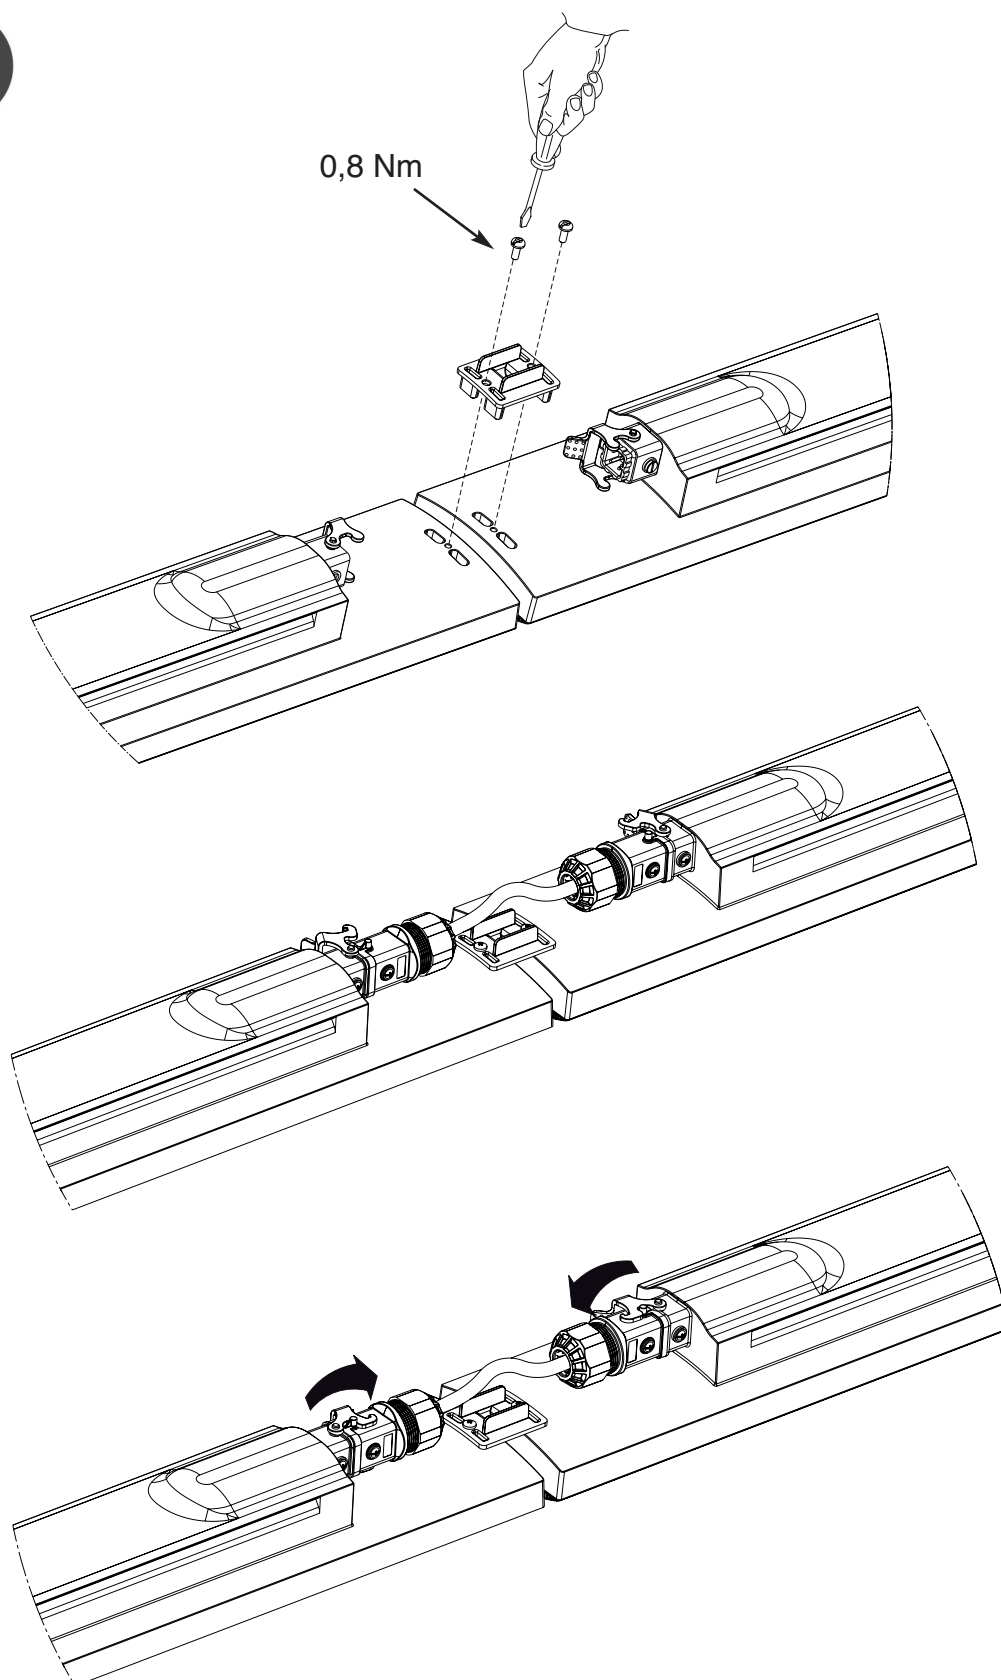


MAX 35 SMART [3]



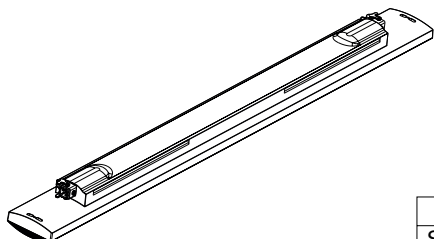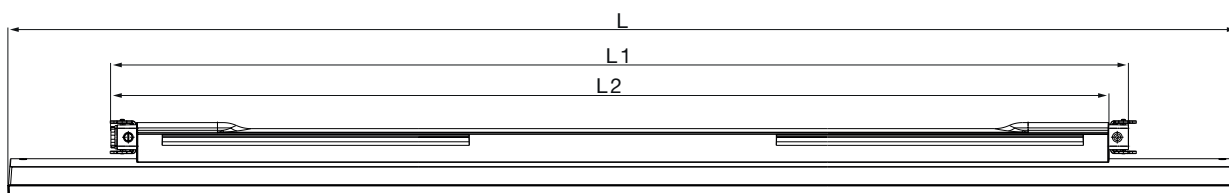

	L	L1	L2
SMART [3] 800	800	//	550
SMART [3] 1200	1200	//	970
SMART [3] 1600	1600	//	1370
SMART [3] 800 LP	800	590	//
SMART [3] 1200 LP	1200	990	//
SMART [3] 1600 LP	1600	1390	//

**GWS3296****GWS3194****GWS3191****GWS3193**

Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:

Contact details according to the relevant European Directives and Regulations:

GEWISS S.p.A. Via A.Volta, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com



+39 035 946 111

8.30 - 12.30 / 14.00 - 18.00
lunedì ÷ venerdì - monday ÷ friday



+39 035 946 260



sat@gewiss.com
www.gewiss.com