


IP66




|  |         |     |          |          |                       |
|--|---------|-----|----------|----------|-----------------------|
|  | DIMMING |     |          |          | V                     |
|  | 1-10 V  | 5,7 | 0,038 m² | 0,085 m² | 220-240 V<br>50/60 Hz |
|  | DALI    | 5,7 | 0,038 m² | 0,085 m² | 220-240 V<br>50/60 Hz |

| LED CCT | ≤ 5700 K |  |
|---------|----------|--|
| Optics  | RG1      |  |
| S1      | 10 m     |  |
| S2      | 10 m     |  |
| A1      | 10 m     |  |
| A2      | 10 m     |  |
| A3      | 12,5 m   |  |
| C4      | 11 m     |  |
| C3      | 11 m     |  |
| C2      | 11 m     |  |
| C1      | 11 m     |  |


| T [°C] | Flux Factor<br>1-10V version | Flux Factor<br>DALI version | I<br>± 5% | W<br>± 5% |
|--------|------------------------------|-----------------------------|-----------|-----------|
| 25     | 1                            | 1                           | 0,7 A     | 165       |
| 30     | 1                            | 1                           | 0,7 A     | 165       |
| 35     | 1                            | 1                           | 0,7 A     | 165       |
| 40     | 1                            | 1                           | 0,7 A     | 165       |
| 45     | -                            | 0,9                         | 0,63 A    | 148       |
| 50     | -                            | 0,8                         | 0,56 A    | 132       |

Flux Factor = Flux (T) / Flux (T=25°C)



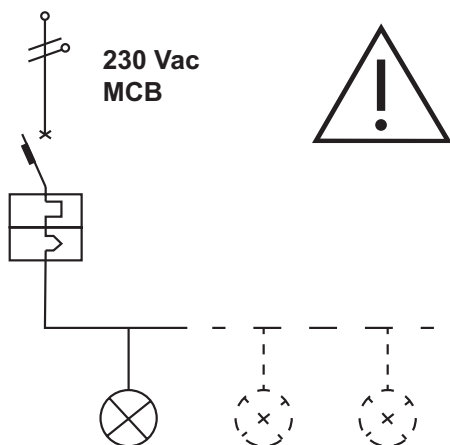



| MCB Type B: | 10A | 16A | 20A |
|-------------|-----|-----|-----|
|             | -   | 1   | 2   |
| MCB Type C: | 10A | 16A | 20A |
|             | 1   | 3   | 5   |
| MCB Type D: | 10A | 16A | 20A |
|             | 4   | 8   | 12  |

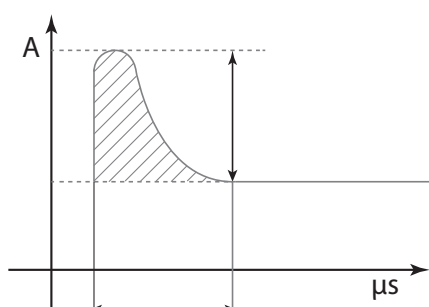



|     | $I_{LED}$ (mA) | DIMMING | LED driver inrush current peak and width |
|-----|----------------|---------|------------------------------------------|
| LED | Max. 700       | 1-10V   | 41A / 440 $\mu s$                        |
| LED | Max. 700       | DALI    | 58A / 340 $\mu s$                        |




## DIMMING 1-10V / DALI

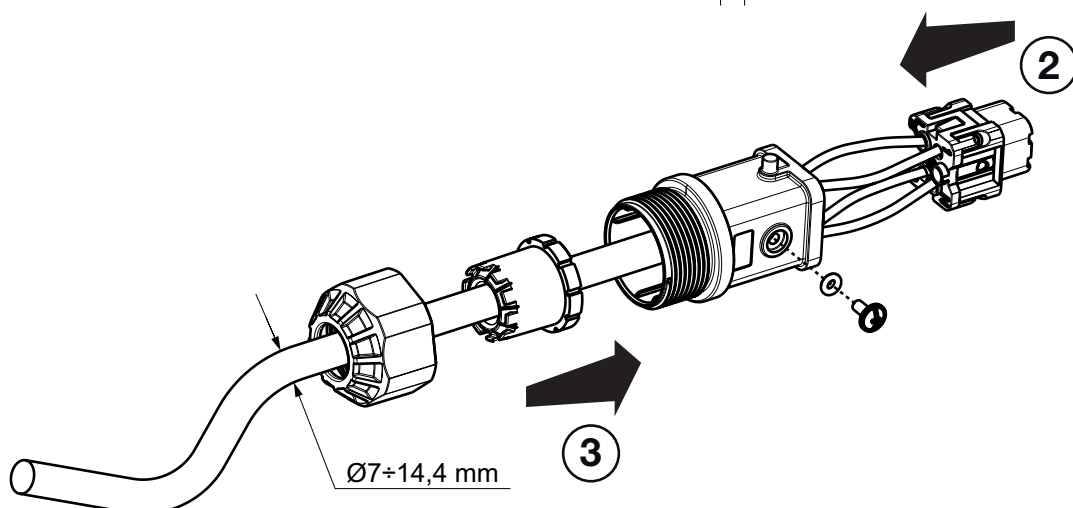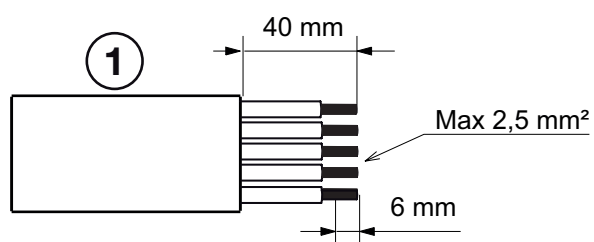


|   |   | 1-10V | DALI |
|---|---|-------|------|
| ① | = | L     | L    |
| ③ | = | N     | N    |
| ④ | = |       |      |
| ② | = | +     | DA   |
| ⑤ | = | -     | DA   |

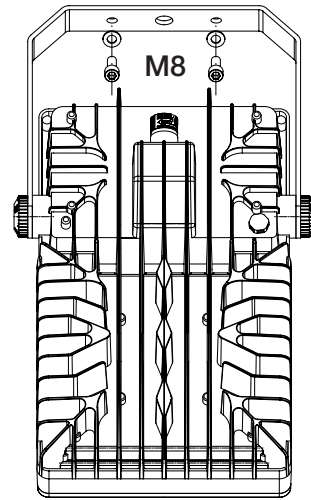
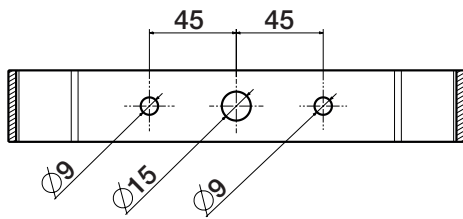


20 Nm

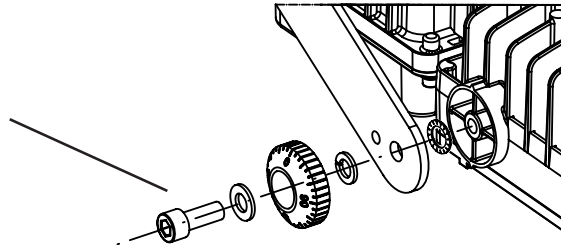

3 Nm

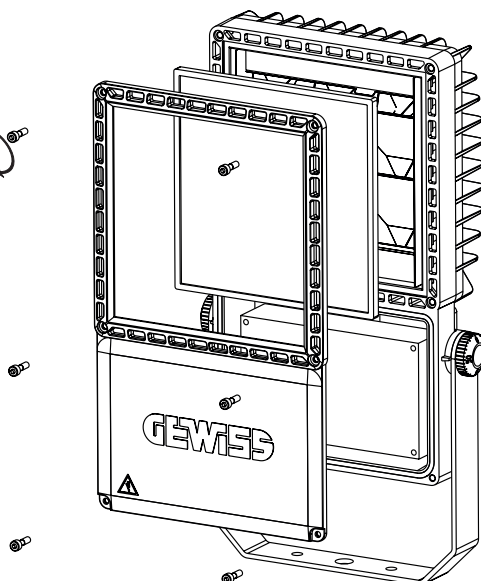

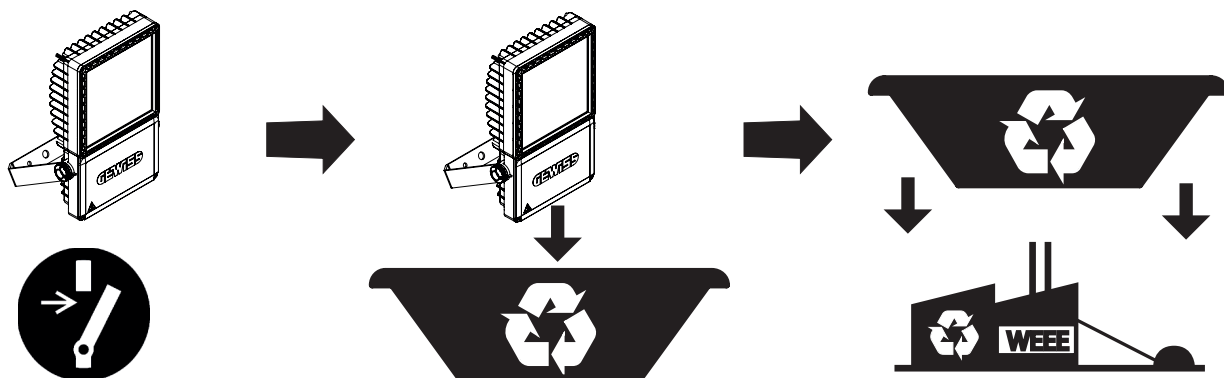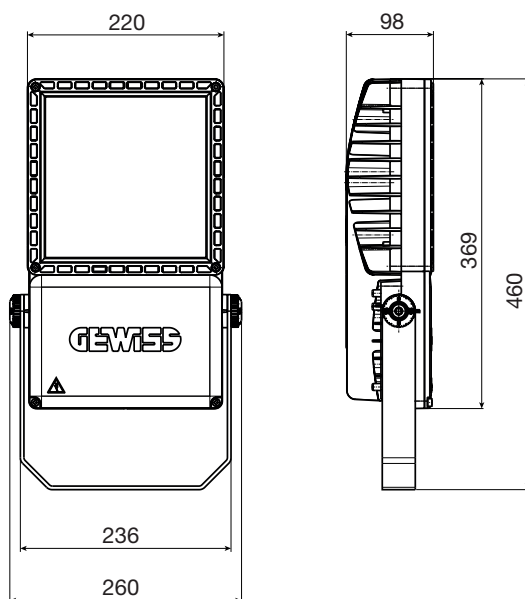

Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:

Contact details according to the relevant European Directives and Regulations:

GEWISS S.p.A. Via A.Volta, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: [qualitymarks@gewiss.com](mailto:qualitymarks@gewiss.com)



+39 035 946 111  
8.30 - 12.30 / 14.00 - 18.00  
lunedì ÷ venerdì - monday ÷ friday



+39 035 946 260



[sat@gewiss.com](mailto:sat@gewiss.com)  
[www.gewiss.com](http://www.gewiss.com)