


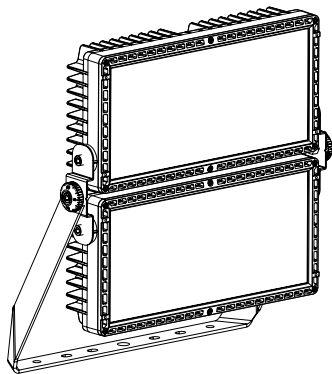























	 Kg	 h			 I	Uout	t _a
	15	Max. 50 m	0,056 m ²	0,222 m ²	Max. 0,7A	Max 600V [~]	50°C





LED CCT			≤ 5700 K
Optics			RG1
		S1	10 m
		S2	10 m
		A1	10 m
		A2	10 m
		A3	12,5 m
		C4	11 m
		C3	11 m
		C2	11 m
		C1	11 m







ON/OFF		
1	=	+
2	=	-
	=	

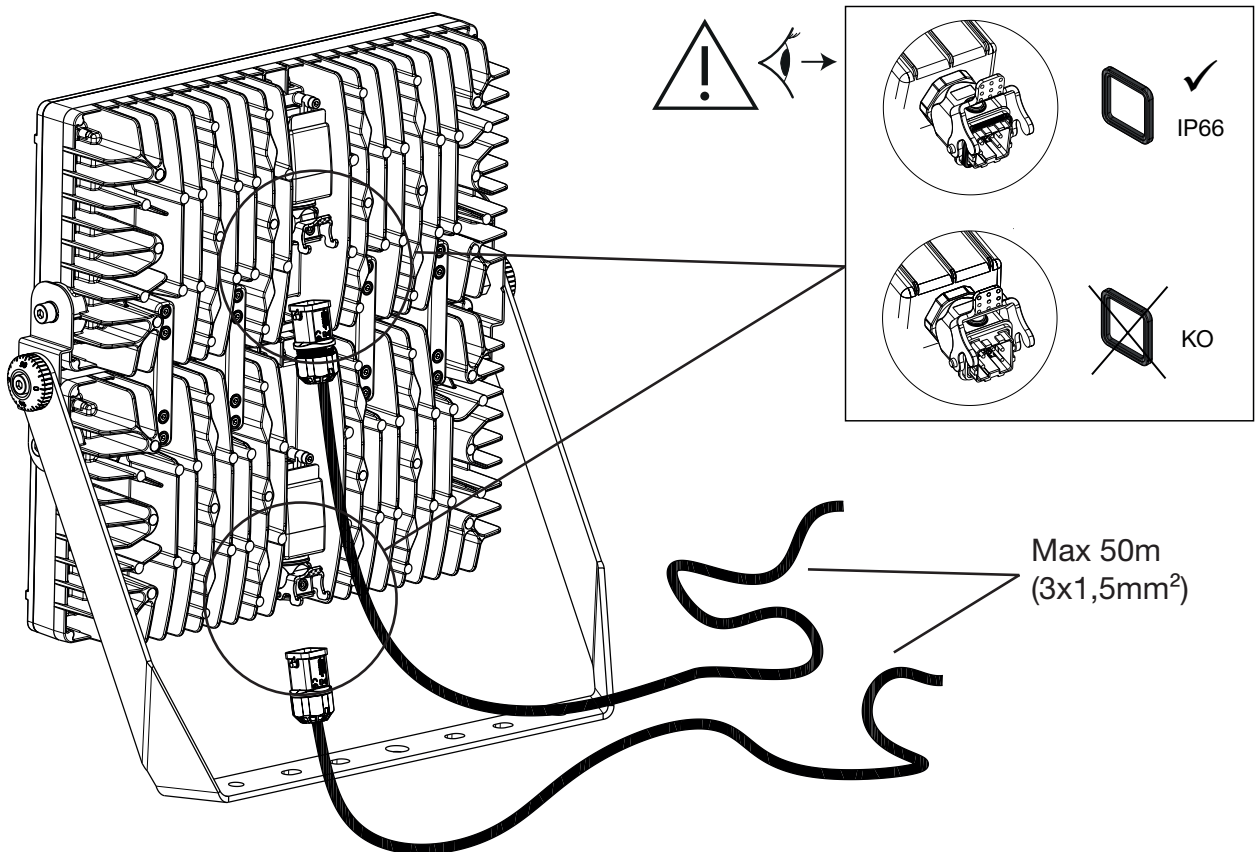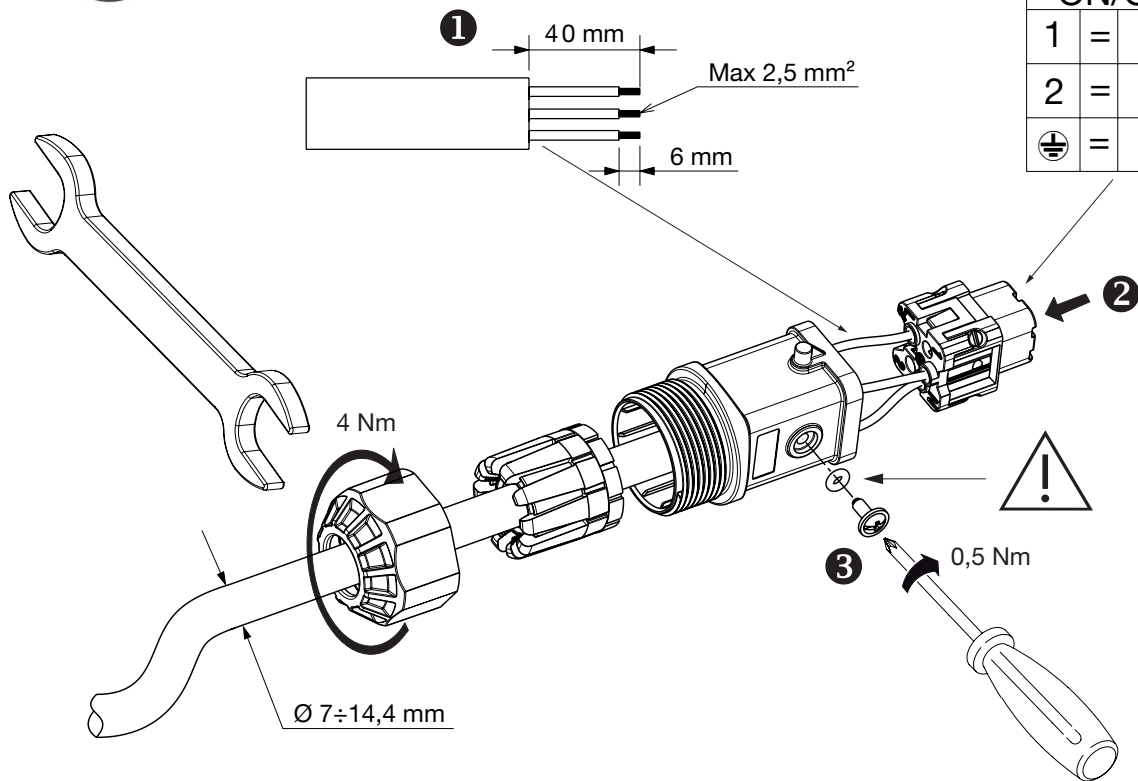


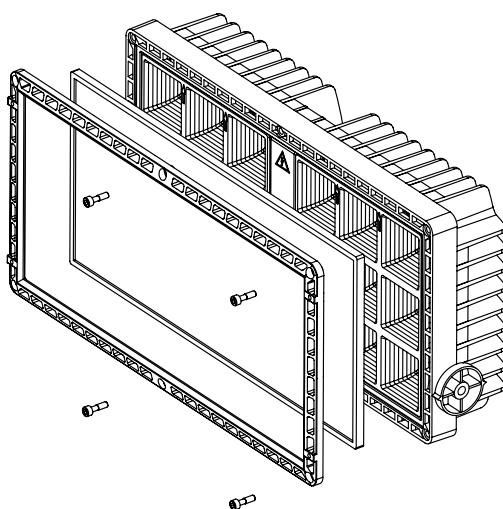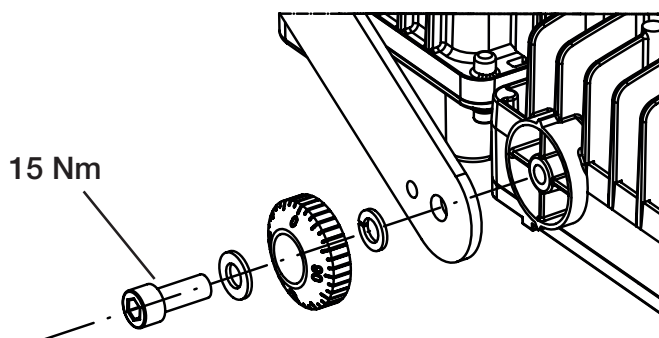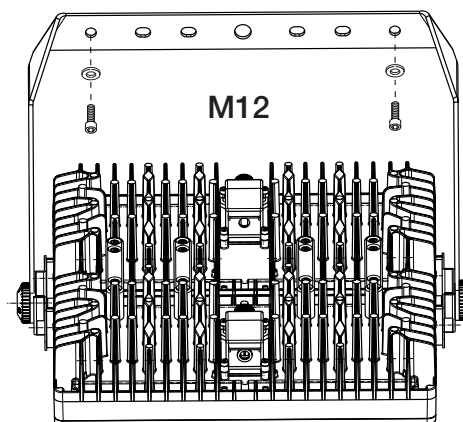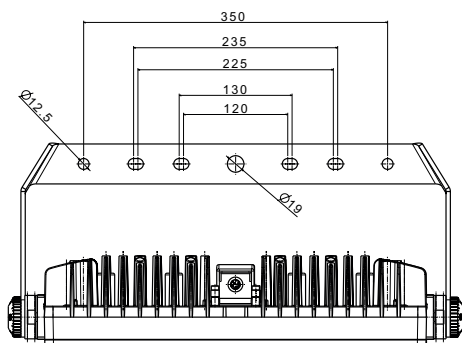


GWP2903

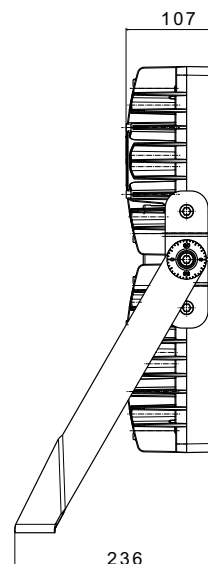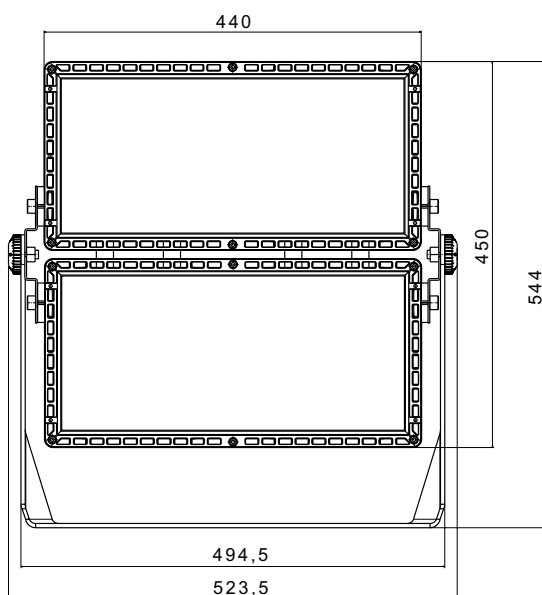


Standard Picatinny








GWP2904



GWP2905



GWP2907

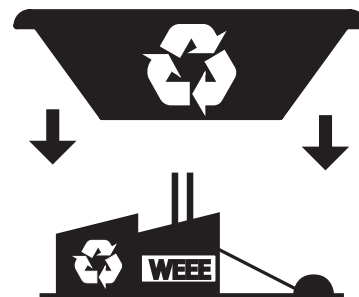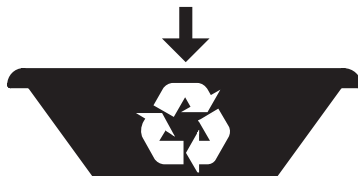

Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:
Contact details according to the relevant European Directives and Regulations:

GEWISS S.p.A. Via A.Volta, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com



+39 035 946 111
8.30 - 12.30 / 14.00 - 18.00
lunedì - venerdì - monday - friday



+39 035 946 260



sat@gewiss.com
www.gewiss.com