

CE

UK
CA

IP66

+50°C
-30°C

1m


	DIMMING				V
	1-10 V	5,7	0,038 m²	0,085 m²	220-240 V 50/60 Hz
	DALI	5,7	0,038 m²	0,085 m²	220-240 V 50/60 Hz




LED CCT		≤ 5700 K
Optics		RG1
	S1	10 m
	S2	10 m
	A1	10 m
	A3	12,5 m
	C4	11 m
	C3	11 m
	C2	11 m
	C1	11 m

T [°C]	Flux Factor 1-10V version	Flux Factor DALI version	I ± 5%	W ± 5%
25	1	1	0,7 A	165
30	1	1	0,7 A	165
35	1	1	0,7 A	165
40	1	1	0,7 A	165
45	-	0,9	0,63 A	148
50	-	0,8	0,56 A	132

Flux Factor = Flux (T) / Flux (T=25°C)




MCB Type B:	10A	16A	20A
	-	1	2
MCB Type C:	10A	16A	20A
	1	3	5
MCB Type D:	10A	16A	20A
	4	8	12

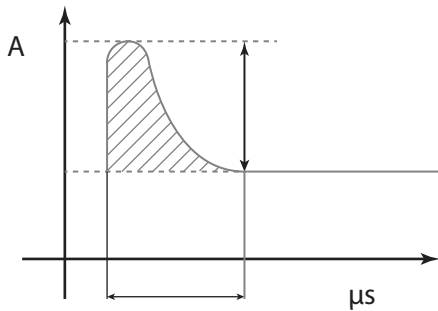


	I_{LED} (mA)	DIMMING	LED driver inrush current peak and width
LED	Max. 700	1-10V	41A / 440 μs
LED	Max. 700	DALI	58A / 340 μs




DIMMING 1-10V / DALI

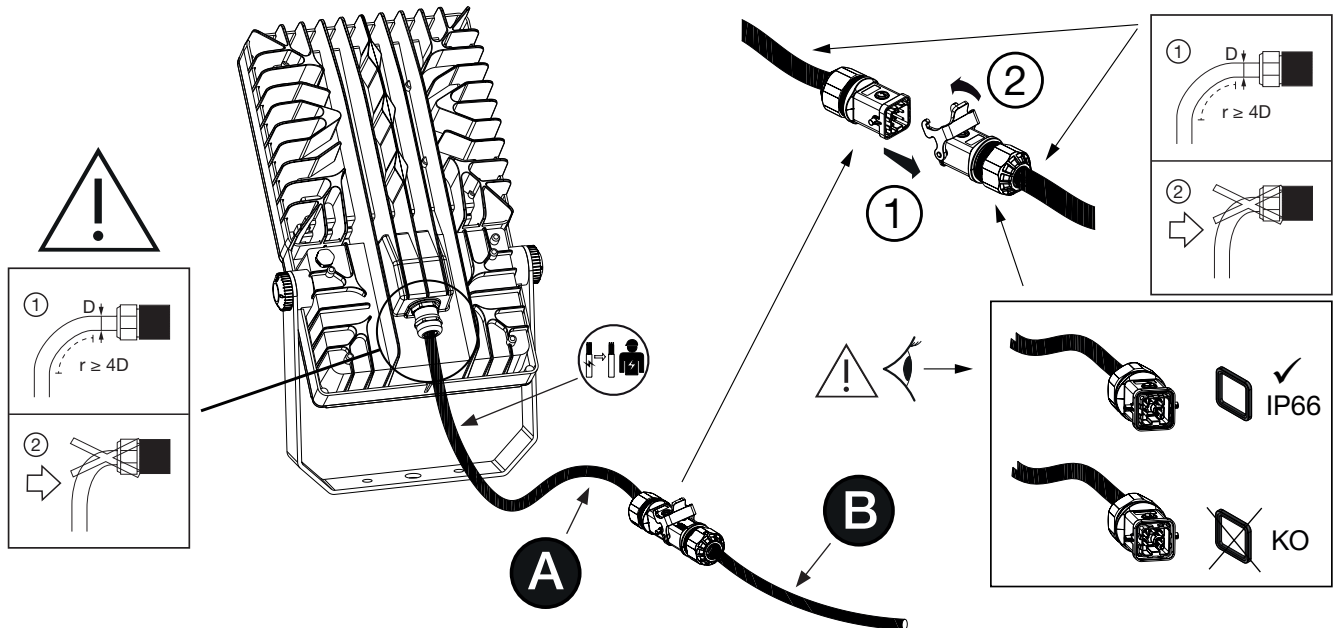


A GWP20112

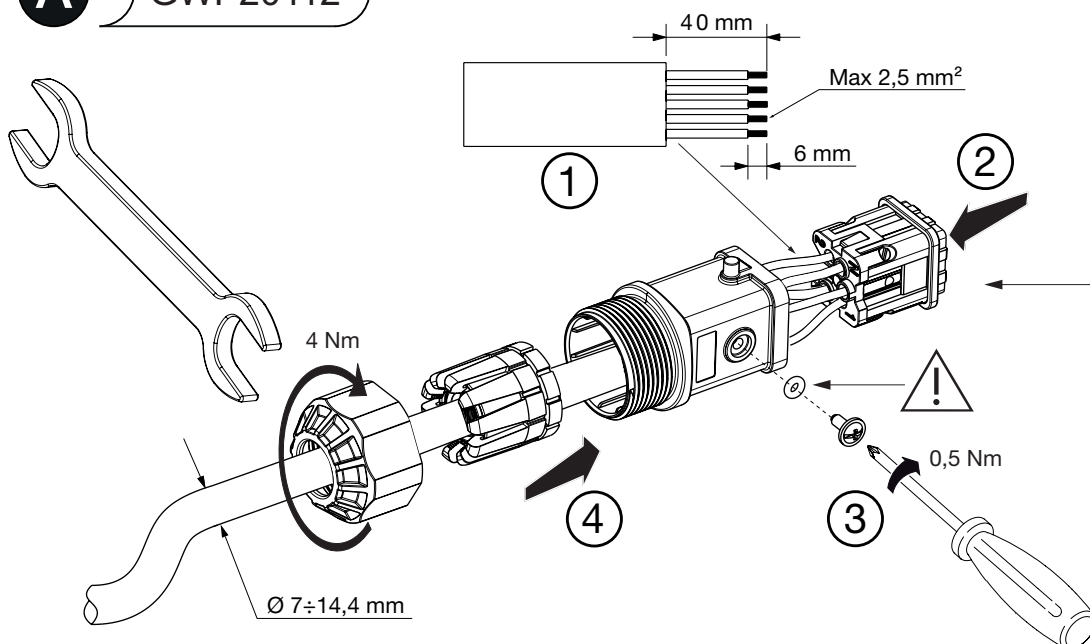



		1-10V	DALI
L	=	L	L
N	=	N	N
⊕	=	⊕	⊕
②	=	+	DA+
①	=	-	DA-







B GWP20112

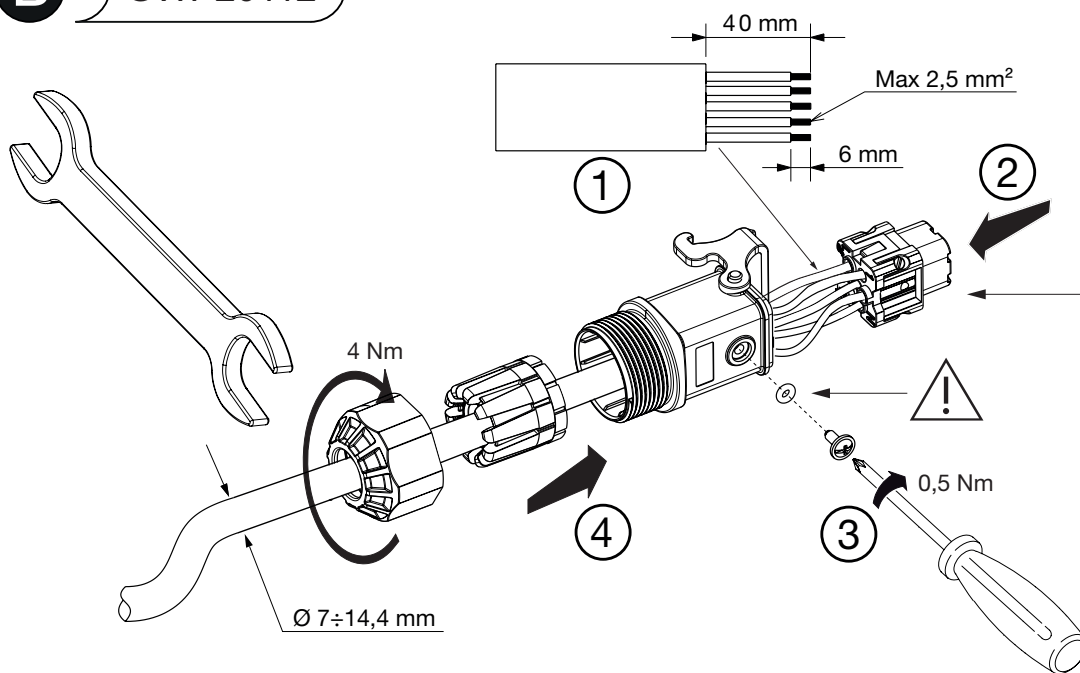




		1-10V	DALI
L	=	L	L
N	=	N	N
	=		
②	=	+	DA+
①	=	-	DA-

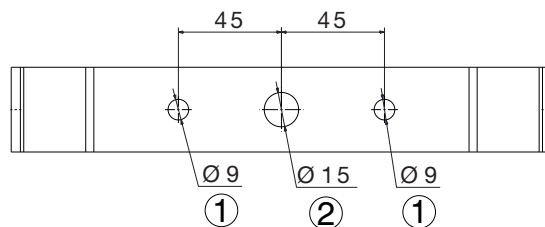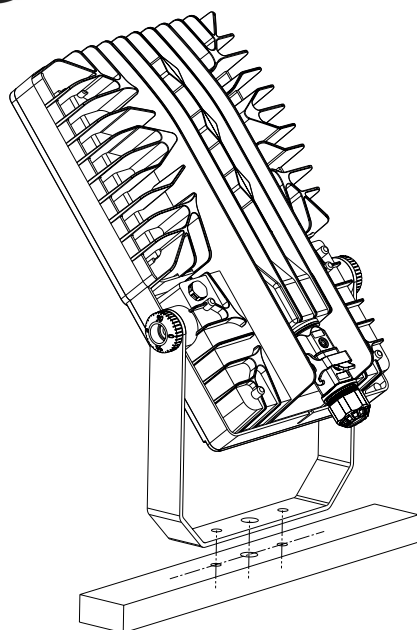


①	M8 DIN7980
②	M14 DIN7980

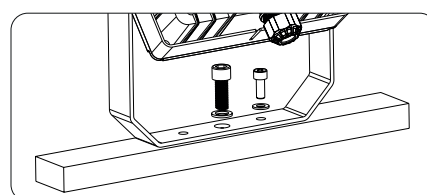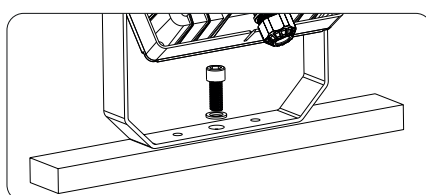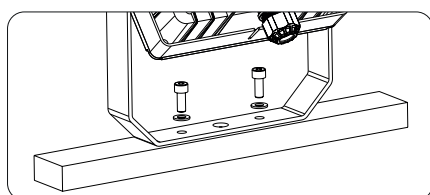

20 Nm

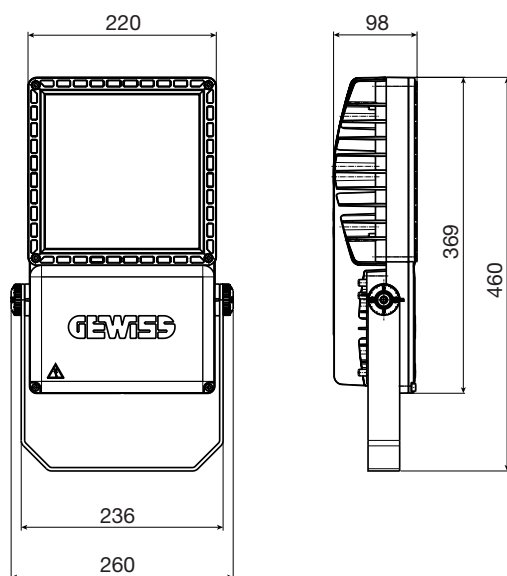


3 Nm

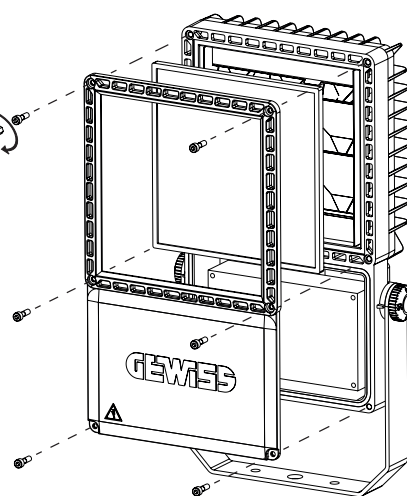

N°6



	OPTICS						
	S1	S2	C1	C2	C3	A1	A3
GWP2903	✓	✓	✓	✓	✓		
GWP20404						✓	✓

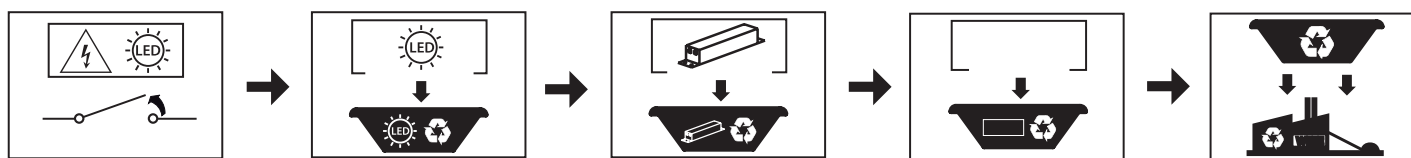

Punto di contatto indicato in adempimento ai fini delle direttive e regolamenti UE applicabili:
 Contact details according to the relevant European Directives and Regulations:
 GEWISS S.p.A. Via D.Bosatelli, 1 IT-24069 Cenate Sotto (BG) Italy tel: +39 035 946 111 E-mail: qualitymarks@gewiss.com

According to applicable UK regulations, the company responsible for placing the goods in UK market is:
 GEWISS UK LTD - Unity House, Compass Point Business Park, 9 Stocks Bridge Way, ST IVES
 Cambridgeshire, PE27 5JL, United Kingdom tel: +44 1954 712757 E-mail: gewiss-uk@gewiss.com



+39 035 946 111

8:30 - 12:30 / 14:00 - 18:00

lunedì - venerdì / monday - friday



www.gewiss.com

