




FK9

Light pliable conduits




FK9 is a new **light pliable conduit** made of PVC with a compression resistance of 320 N and impact resistance of 1 J at -5 °C, classified **22212**. FK9 is recommended for installation in chased wall or ceiling and represents the best solution for those who do not require an high impact resistance but at the same time **do not want to compromise on quality**.

Key benefits of the FK9 - Light pliable conduits



Flexibility

The profile of the FK9 conduits is characterised by a special geometry of the ribs to offer greater flexibility, higher load resistance and reduced thermal memory - characteristics, that simplify and speed up laying procedure and wiring.



A complete range

Available in 6 diameters (from 16 to 50 mm) to cover any installation, FK9 is offered in the typical gray color RAL7035, with or without cable puller.



Protective packaging

The pallets are protected with white stretch film to prevent exposure of the coils to UV rays and ensure at the same time a greater resistance to weathering and improved preservation during outdoor storage.



GEWISS quality

Superior quality characterize the extensive range of conduits and accessories produced by GEWISS starting from carefully surced raw materials and cutting edge machineries at its plants.



The right product for any application



FK9 - 22212

FK9 is a pliable conduit made of PVC available with and without cable puller, from 16 mm to 50 mm of diameter and it is offered in gray RAL 7035 color. It is recommended for brick wall and ceiling installations.



FK15 - 33212

Available with and without cable puller, from 16 mm to 63 mm of diameter and in 6 colours, the FK15 pliable conduits are made of PVC and suitable for brick wall, ceiling and traditional screed installations.



FK-Xtreme - 33412

Pliable conduits FK-Xtreme have been designed to protect against the ingress of liquid concrete. Available in 6 colours, the diameter range is between 20 mm and 40 mm.



ICTA - 34223 and FKHF - 23223

ICTA and FKHF are polypropylene conduits. Classified as Low Smoke Zero Halogen so can be installed in public buildings and plasterboard walls. ICTA is available in 6 colours, FKHF in grey RAL7035, both available up to 63 mm, with or without cable puller.

**NEW
PACKAGING**



100%
Recyclable




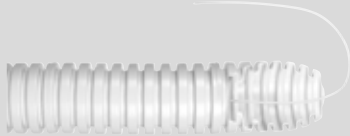
Lower CO₂
emissions



Less waste on
construction
sites

Ask your sales
representative
for more
information

Discover the full range of FK9 on www.gewiss.com

FK9 Pliable conduits	Ø Conduit (mm)	Coil (m)	Pallet (m)	Product code
 WITHOUT CABLE PULLER GREY RAL 7035	16	100	6.400	DX10016R
	20	100	5.200	DX10020R
	25	75	3.300	DX10025R
	32	50	1.800	DX10032R
	40	25	1.100	DX10040R
	50	25	400	DX10050R
 WITH CABLE PULLER GREY RAL 7035	16	100	6.400	DX10116R
	20	100	5.200	DX10120R
	25	75	3.300	DX10125R
	32	50	1.800	DX10132R
	40	25	500	DX10140R
	50	25	400	DX10150R

Visit www.gewiss.com and follow us on:

