



ELIA is the family of GEWISS products designed for **fast and easy installation** and **with a 5 year guarantee**.

Elia HL - Highbay Led - is the solution to light indoor spaces with high ceilings. Suitable for industry and service applications. It offers high performance and energy savings, with low maintenance needs.

The advantages of ELIA HL




Relamping

The ELIA HL range has been designed to offer excellent efficiency at a competitive price to guarantee a fast return on investment.




Quality guarantee

The ELIA HL range is part of the family of GEWISS LED lighting products designed to ensure maximum reliability and innovation, in terms of product quality and individual components.



Easy installation

The suspension hook guarantees installation even in complex environments. In existing installations, the eye-hook provides a fast replacement of conventional luminaires.



Wide range


The ELIA HL range is available in three types of beam and three different types of luminous flux, for any kind of illumination needs.



Payback example - Workshop project 300 lx


- Calculation base: replacement of 24 traditional lighting fixtures
- Operating period: 3,500 hours per year
- ROI (Return On Investment): just over one year and half

Energy cost: source Eurostat

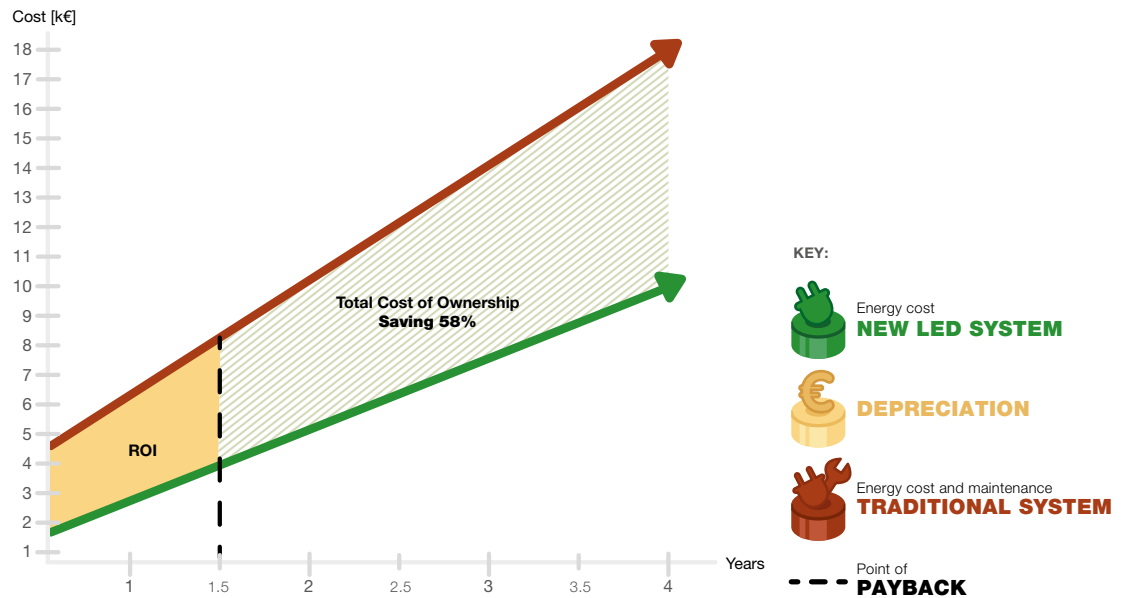


Dimensions

M2



Dimensions	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
M2	Ø 360	130	Ø 25	68	186
M3	Ø 360	130	Ø 25	68	186
L2	Ø 360	146	Ø 25	68	186
M2, M3, L2 DALI	Ø 360	192	Ø 30	68	190

Photometry

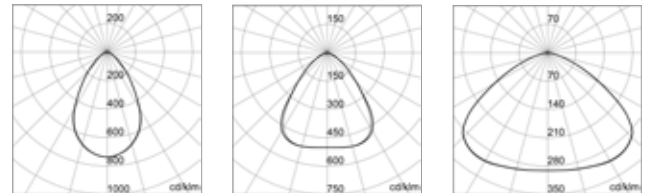

Optic 60°

Optic 90°


Optic 120°

Discover the full **ELIA HL** range on www.gewiss.com

Code	Size	Power (W)	Optic	Luminous flux (lm)	Colour temperature (K)	Control system
GWF1000MH840	M2	120	60°	17,900	4,000	On/Off
GWF1000ML840			90°	18,200		
GWF1000MM840			120°	18,000		
GWF1001MH840			60°	17,900		DALI
GWF1001ML840			90°	18,200		
GWF1001MM840			120°	18,000		
GWF1000NH840	M3	150	60°	22,400	4,000	On/Off
GWF1000NL840			90°	22,800		
GWF1000NM840			120°	22,500		
GWF1001NH840			60°	22,400		DALI
GWF1001NL840			90°	22,800		
GWF1001NM840			120°	22,500		
GWF1000QH840	L2	200	60°	29,800	4,000	On/Off
GWF1000QL840			90°	30,300		
GWF1000QM840			120°	30,000		
GWF1001QH840			60°	29,800		DALI
GWF1001QL840			90°	30,300		
GWF1001QM840			120°	30,000		

Technical features

- Colour rendering index (CRI): 80
- Lifetime: L80B50 (Tq=25°C) = 50,000 h
- Step McAdam: 5 SDCM
- Operating temperature (Ta): -30°C + 50°C



Visit www.gewiss.com and follow us on:    