




ELIA^{BL}

GEWISS

Elia is the family of GEWISS products designed for **for fast and easy installation** and **with a 5 year guarantee**.


Elia BL - Bollard Led - is an elegant, die-cast aluminium ground-mounted device, ideal for architectural lighting in residential areas and passageways.

The advantages of the **ELIA BL**



Relamping

The ELIA BL range has been designed to offer excellent efficiency at a competitive price to guarantee a fast return on investment.

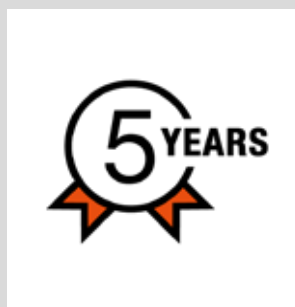

Quality guarantee

The ELIA BL range is part of the family of GEWISS LED lighting products designed to ensure maximum reliability and innovation in terms of product quality and individual components.



Exceptional strength

The ELIA BL has been built to last, the die cast aluminium body provides exceptional impact resistance to IK08 and protection against harsh environments.



Versatile

The ELIA BL is available in two different sizes (500mm and 700mm) for architectural outdoor lighting, thanks to its polycarbonate bi-emission diffuser it offers a pleasant and comfortable dome light.


Visit www.gewiss.com and follow us on:




Payback example -
external area
100 lx

- Calculation base:
replacement of 40 traditional
lighting fixtures
- Operating period:
3,200 hours per year
- ROI (Return On Investment):
in two years


Energy cost: Eurostat source

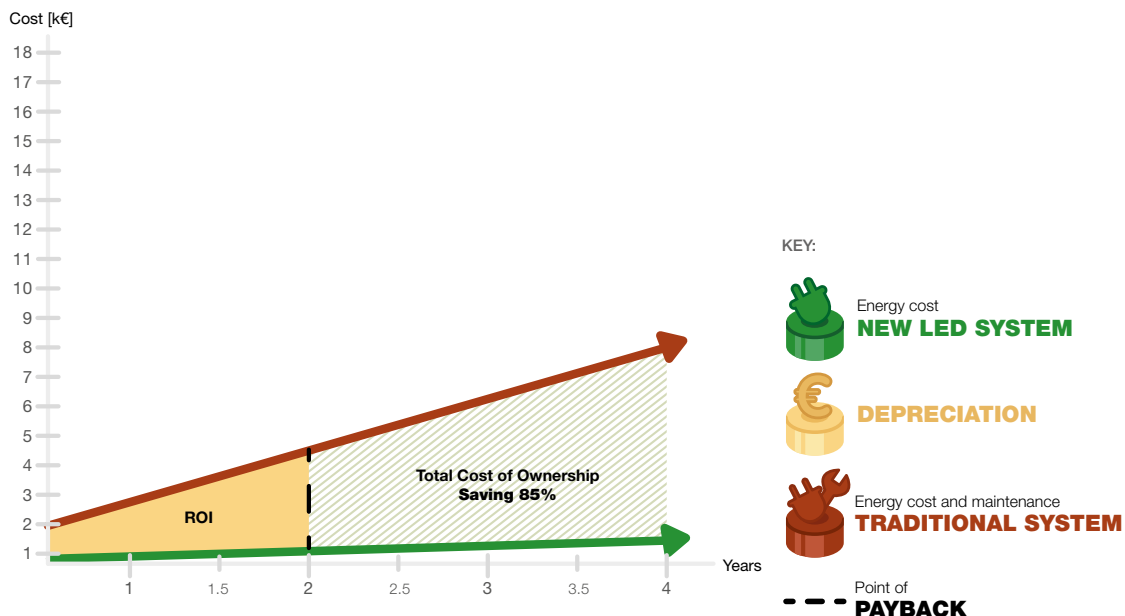

Dimensions

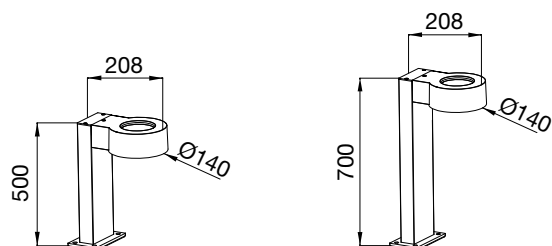

Photometry



Opal bi-emission

Discover the full **ELIA BL** range on www.gewiss.com

Code	Height	Power (W)	Optic	Luminous flux (lm)	Colour temperature (K)	Control system
GWF2300LR830	500 mm	8	OPAL BI-EMISSION	650	3,000	On/Off
GWF2300LR840				650	4,000	
GWF2300LR857				680	5,700	
GWF2300PR830	700 mm			650	3,000	
GWF2300PR840				650	4,000	
GWF2300PR857				680	5,700	

Technical features

- Operating temperature (Ta): - 20°C + 45°C
- Lifetime: L80B50 (Tq=25°C) = 50,000 h
- Step McAdam: 5 SDCM
- Colour rendering index (CRI): 80



Visit www.gewiss.com and follow us on: