


Flush-mounting auxiliary touch module with two commands. Two axial touch areas on the front; this product can be used in combination with the auxiliary wired inputs of the following devices of the Chorusmart range: connected commands, connected 1- channel On/Off actuator, connected movement sensors, TOUCH and EVO commands, or as a wired command for a connected 2-channel ZigBee interface. The device must be completed with one of the ICE Touch plates available. Inside the package of the plates is a sheet of interchangeable icons to customize the control symbol.

| | | | |
|---|--|--|--|
| Description | Auxiliary touch 2-commands module | Power supply | 100 ÷ 240 V ac - 50/60 Hz |
| No. modules | 1 | No. input channels | - |
| Local control | Via 2 frontal touch areas (must be completed with ICE Touch plate) | Auxiliary input channel voltage | - |
| Stocking temperature | -25 ÷ +70 °C | No. output channels | 2 |
| Working temperature | -5 ÷ +45 °C | Output contacts | - |
| Relative humidity (non-condensative) | Max 93% | 240 V ac Incandescent-halogen lamps | - |
| Front light signaling | Blue led | 240 V ac LED lamps | - |
| Wiring terminals | With screw | Loads piloted from electronic transf. 240 V ac | - |
| Terminal tightening capacity stranded cables (mm ²) | Max. 1,5 | 240 V Fluorescent lamps | - |
| Terminal tightening capacity solid cables (mm ²) | Max. 1,5 | Load control | - |
| Context | Dry indoor places | Acoustic signalling element | Buzzer |
| IP degree | IP20 (with plate fitted) | Standard | 2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000 |

DIMENSIONAL

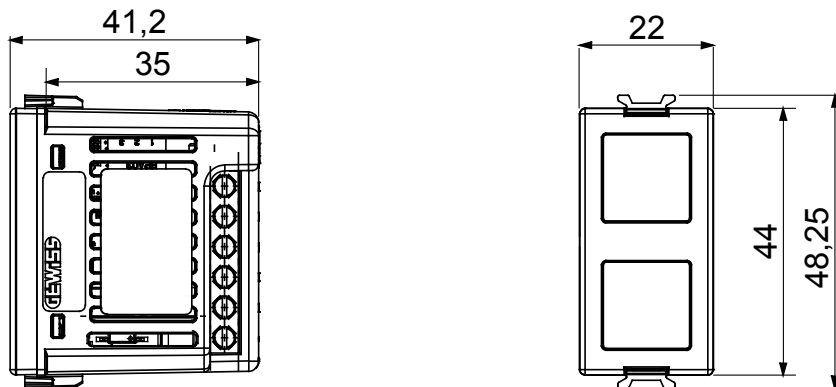

TECHNICAL SYMBOLOGY

IP

IP20 (with plate fitted)

STANDARDS/APPROVALS

