




A complete range of commands and protections, energy and signal sockets, temperature control units, comfort management solutions, and acoustic/visual signalling devices. The commands, available with two different buttons designs, are illuminated with LED light and feature elegant indicator icons. System Pura is available in two colours and two finishes: glossy white, satin black and satin white. The series proposes intuitive and modern solutions designed to enhance any space. These features make it ideal for both residential applications and special installations, where reliability and aesthetics must coexist harmoniously.

Category	Switch	Button key	With lens
Symbol	-	Description	1P - 16 AX backlight
Colour	Glossy white	Voltage	250 V ac
Signalling unit	LED 230 V ac (0,4 W) white color	Standard	EN 60669-1
Resistance at test voltage	2000 V at 50 Hz for 1 minute	Rated power of 230V LED lamps	200 W
Insulation resistance	> 5 MOhm	Wiring terminals	With screw
Prolonged operation switch (no.of position changes)	40.000 at In 250 V ac cosφ=0,6	Thermo-pressure with ball	125 °C
Glow Wire Test	850 °C	Terminal grip on cable traction	> 50 N
Terminal tightening capacity stranded cables (mm <sup>2</sup> )	min. 0,75 - max. 2x4	Terminal tightening capacity solid cables (mm <sup>2</sup> )	min. 0,5 - max. 2x2,5
No. modules	1	Material	Technopolymer
Halogen Free	Yes, according to EN IEC 63355 (with the exception of LED)	Electrocod	0130

### DIMENSIONAL

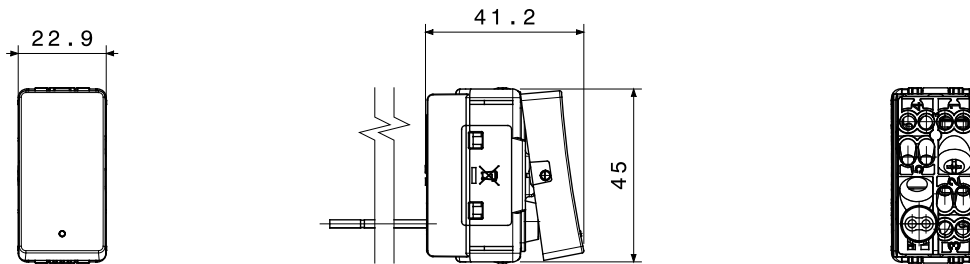

### TECHNICAL SYMBOLOGY



### STANDARDS/APPROVALS

