


Wiring devices system characterized by its profile and shape inspired to the Chorus family feeling. Wide range of plates with an Italian design, articulated into two families, GEO and LUX cover plates, available in many materials and finishes. The range is available in three colors: glossy white, satin black, painted titanium and fits in 3x3 inches (1-gang) and 3x6 inches (2-gang) British Standard boxes. Range expandable thanks to the Chorus modular devices.

|   |                                |   |                                |
|---|--------------------------------|---|--------------------------------|
| Category  | Switched socket                | Description   | 2P+E - 13 A                    |
| Colour  | White                          | Voltage   | 250V ac                        |
| Standard  | British                        | Characteristics                                     | With safety shields            |
| For plug pins   | Flat                           | Wiring terminals                                    | With screw                     |
| Standard  | BS 1363-2                      | Resistance at test voltage                          | 2000 V at 50 Hz for 1 minute   |
| Insulation resistance                                 | > 5 MOhm                       | Thermo-pressure with ball                           | 125 °C                         |
| Glow Wire Test  | 850 °C                         | Terminal grip on cable traction                     | > 50 N                         |
| Terminal tightening capacity<br>stranded cables (mm²) | min. 1,5 - max. 2,5            | Terminal tightening capacity<br>solid cables (mm²)  | min. 1,5 - max. 2,5            |
| Prolonged operation switch (no.of position changes)   | 40.000 at In 250 V ac cosφ=0,6 | Prolonged operation socket (no.of position changes) | 10.000 at In 250 V ac cosφ=0,8 |

#### DIMENSIONAL

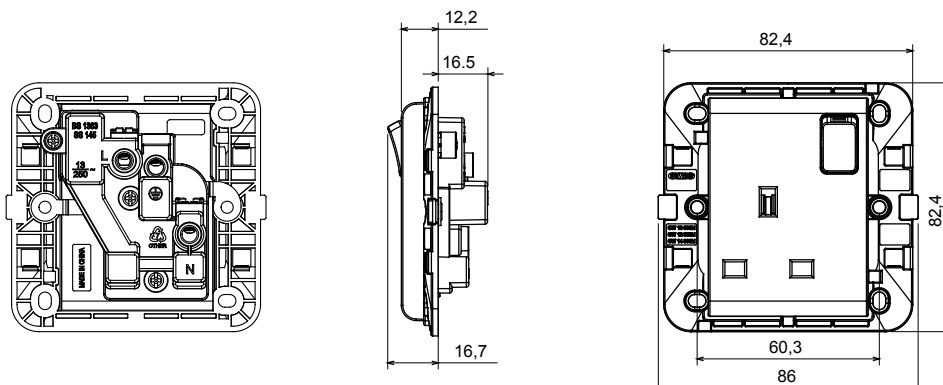

#### TECHNICAL SYMBOLOGY



#### STANDARDS/APPROVALS

