



Description Interruttore automatico scatolato  
 Code MSXE 630  
 No. of poles 4P  
 Rated current 630 A  
 Release Electronic

#### ELECTRICAL CHARACTERISTICS

Standard	IEC/EN 60947-2
Use category	A
Rated frequency (Hz)	50 / 60
Rated operating voltage (Ue)	690 Vac
Rated impulse withstand voltage (Uimp)	8 kV
Overvoltage category	IV
Insulation voltage (Ui)	800 V
Thermal regulation	0,4 - 0,5 - 0,63 - 0,8 - 0,85 - 0,9 - 0,95 - 1 x In
Magnetic regulation	Electronic LSI
Neutral protection	50% - 100% x Ir
Total power loss	158.76 W
Rated short-circuit current making capacity (Icm)	-
Rated short-time withstand current for 0,3s (Icw)	-
I <sub>dn</sub> regulation	-
DT regulation	-

#### MECHANICAL CHARACTERISTICS

Execution	Fisso - Rimovibile
DIN rail mounting	No
Accessoriabile con comando motore	Si
Compatible interlock	Lever - Cable
Terminals supplied	Front FC
Assembly position	Any
Upline/downline power supply	Si
Electrical life (415Vac)	4.500 cicli
Mechanical life	15.000 cicli
Operating temperature	-5°C +65°C
Stocking temperature	-20° +65°
Weight (kg)	6.5
Width	185 mm
Height	260 mm
Depth	103 mm


#### SERVICE BREAKING CAPACITY (ICU)

220/240Vac	85 kA
400/415Vac	50 kA
440Vac	45 kA
525Vac	30 kA
690Vac	20 kA
250Vdc	-

#### RATED BREAKING CAPACITY (ICS)

220/240Vac	85 kA
400/415Vac	50 kA
440Vac	45 kA
525Vac	30 kA
690Vac	15 kA
250Vdc	-

### DIMENSIONAL

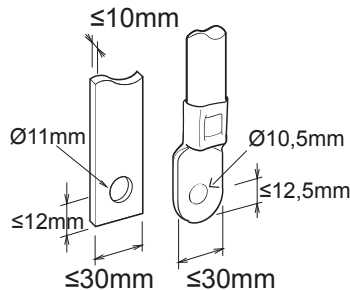



Product Data Sheet

GWD9387

MSX Range

STANDARDS/APPROVALS

