





Road reinforcement with road optics and simplified maintenance, consisting of cover, frame and pole attachment in powder coated aluminium die-casting: aluminium with low copper content powder coated polyester after pre-treatment, for increased corrosion resistance. PA6 side ventilation grills. Optical system made with methacrylate lens, consisting of several different lenses that, with a single photometric distribution, and varying the installation parameters and the number of motors installed, allows the achievement of the obligatory road requirements. Common immunity to surges up to 12kV, according to IEC EN 61000-4-5 (issued by a third party) without the aid of additional protective devices. Can be used up to 50°C ambient temperature but with reduction of the supply current as indicated in the Instruction Manual.

Application	External	Series	STREET [O3]
Type	Programmable (5 step)	IP degree	IP66
Mechanical resistance	IK08 BODY - IK06 LENS	Insulation class	II
Tilt adjustable	±20° bracket - 0°±20° pole head	Maximum surface exposed to the wind	0.26 m²
Operating temperature	-25 +25 °C	Weight (kg)	10.3
Colour	Graphite/Aluminium	Minimum distance from the illuminated object	1 m
Voltage	220/240 V - 50/60 Hz - Stand alone and/or programmable 5 Step	Lamp	LED
System power	131 W	Optic	ST1 - ULOR: 0%
Voltage	220-240 V - 50/60 Hz	Colour temperature	4000 K (CRI>70)
LED current	700 mA	Number of modules	4 (4x16 LED)
Nominal flux (lm)	15370	Lumen output (lm)	12900
Photobiologic Risk	RG1/RG2 @ 20cm	LED Life Time (L80B10)	100000 h
LED Life Time (L90B20)	50000 h	Warranty	5 years
Electrocod	244C	Light source replaceability	By professional
Controlgear replaceability	By professional		

### DIMENSIONAL

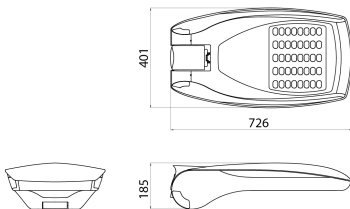

### PHOTOMETRIC DISTRIBUTION



### TECHNICAL SYMBOLOGY



IP

IP66

IK

IK08 BODY -  
IK06 LENS



0.26 m²



INSTALLATION  
min -25°C  
max +25°C



1 m



### STANDARDS/APPROVALS

