



Multifunctional lighting device for residential and urban areas, with polycarbonate body and sanded diffuser. Possibility of wall, ceiling, pole and column installation in graphite gray, white and midnight blue colors. Also available in the 13W and 26W LED version.

Application	Indoor / Outdoor	Version	LED with presence detector
Voltage	220-240 V - 50/60 Hz	Insulation class	I
Colour	Graphite grey	IP degree	IP55
Mechanical resistance	IK09	Glow Wire Test	850 °C
Minimum distance from the illuminated object	1 m	Operating temperature	-25 +25 °C
Nominal flux (lm)	1200	Lamp	LED
System power	13 W	Colour temperature	4000 K (CRI>80)
Lumen output (lm)	1000	Efficiency class of integrated LEDs	A ÷ A++
Type of light source	LED - Not replaceable	Weight (kg)	2.2
Warranty	Can be extended	Electrocod	2424
LED Life Time (L70B50)	50000 h		

DIMENSIONAL

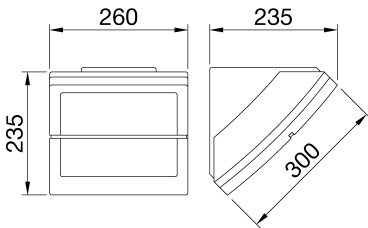

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY



IP

IP55

IK

IK09

GWT

850 °C



1 m



25°C
+25°C



EXTENDED
WARRANTY

STANDARDS/APPROVALS

