



Industrial LED lighting fixture made of die-cast EN AB 46100 aluminum with polyester powder coating. Correct lighting is provided by an optical system composed of different versions of lenses. Silicone gaskets, breathing and anti-condensation device in Goretex, waterproof connector for 1.5 mm² cables and stainless steel external screws. Integrated suspension fixing system thanks to a ring made directly in the die-cast aluminum. The die-cast aluminum structure guarantees optimal performance conditions both @ Ta25 ° and @ Ta50 ° thanks to specific thermal sizing tests. The correct heat dispersion inside ESALITE is guaranteed by the special passive heat sink with a very low copper content that offers high qualitative and quantitative performances.

GENERAL INFORMATION

| | |
|----------------------------------|---|
| Context | Logistics and industrial manufacturing lighting |
| Luminaire | LED Industrial Reflector |
| Application | Internal |
| Unique digital code (Datamatrix) | Datamatrix |
| Colour | Grey RAL 9006 |
| Type of light source | LED |
| System power | 125 W |
| LED Lifetime | L90B10 (Tq 25°) 100000 h; L90B10 (Tq 50°) 55000 h |
| Weight (kg) | 7.5 |
| Warranty | 5 years |
| Stocking temperature | -25°C ÷ +70°C / HR 10% ÷ 85% |
| Operating temperature | -25°C ÷ +50°C |

| | |
|------------------|-------------------------|
| MATERIALS | - |
| Body | Die-cast aluminium |
| Shield type | High transparency PMMA |
| Optic | PMMA lens |
| Gasket | Silicon |
| Locking Hook | - |
| External screw | Stainless steel |
| Colour | Polyester powder coated |

| | |
|---|---------------|
| STANDARDS AND APPROVALS | - |
| Classification | - |
| Device with reduced surface temperature | - |
| DIN 18032-3 certification | Not available |
| IPEA | - |
| Insulation class | I |
| IP degree | IP65 |
| Mechanical resistance | IK07 |
| Glow Wire Test | 650 °C |

OPTIC AND ILLUMINATING FEATURES


| | |
|------------------------------------|------------|
| Optic | Medium 60° |
| Unified Glare Rating | UGR ≤ 28 |
| Lumen output (lm) | 14700 |
| Efficacy (lm/W) | 118 |
| Colour temperature | 5700 K |
| Colour Rendering Index | CRI>80 |
| Standard Deviation Colour Matching | SDCM = 3 |
| Photobiological Risk Class | RG0 |

| | |
|--|--------------------------------------|
| Standard | EN60598-1; IEC 62778; IEC62471 |
| ELETRICAL AND LIGHTING FEATURES | - |
| Supply voltage | 220-240 V |
| Rated frequency (Hz) | 50/60 Hz |
| Driver | Included |
| Driver failure rate | F10 = 100.000h Tq25°C/50.000h Tq50°C |
| Overvoltage protection | DM 6KV / CM 8KV |
| Control System | DALI |


INSTALLATION AND MAINTENANCE

| | |
|-------------------------------------|---------------------------|
| Mounting and installation | Suspended |
| Tilt | Not possible |
| Wiring | With watertight connector |
| Fixing | - |
| Light source replaceability | Non-replaceable |
| Controlgear replaceability | By professional |
| Driver Box | Built-in |
| Maximum surface exposed to the wind | 0.12 m ² |

DIMENSIONAL

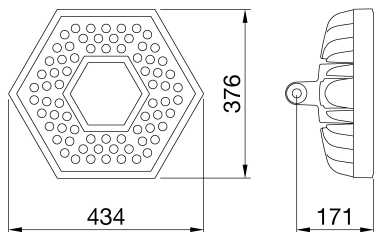

PHOTOMETRIC DISTRIBUTION



TECHNICAL SYMBOLOGY



IP
IP65

IK
IK07

GWT
650 °C



Product Data Sheet
GWS6033GD57K

ESALITE HB

STANDARDS/APPROVALS

