




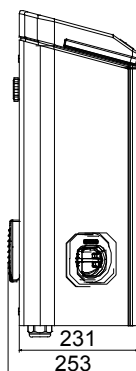

The wall-mounted I-ON charging stations are the JOINON solutions for public and semi-public access, designed for charging electric vehicles and to withstand any wear including impacts, stress, vandalism and atmospheric agents. They are the first and only on the market guaranteed with a IP55 protection rating. The special design allows the units to be adapted into any urban context and parking configuration, with a targeted focus on the user experience of drivers. They are available with standard JoinOn graphics, which may be customised on request.

INPUT		- Socket/Connector Nr. (Type)	2 (Type 2 socket, with shutters)
Terminal blocks	2 x (3 x 10 mm ²)	Charging activation	Free access
Rated current	64 A	Human Interface	LED RGB and TFT Display
Total power	15 kW	Connectivity	No
OUTPUT		MECHANICAL AND FUNCTIONAL CHARACTERISTICS	
Rated voltage	230V	Mounting and installation	Wall mount
Colour	Grey, Headboard RAL 7011	Power max.	7,4 kW per socket
Material	Steel sheet	Thermal-magnetic protection	Currently not present
External treatments	Anti-corrosion and anti-graffiti	Type of residual current protection	Currently not present
IP degree	IP55	Power meter	No
Mechanical resistance	IK10	DC Leakage check	Currently not present
Operating temperature	-25 +50 °C	(Auto)restart electrical protections	No
Customizations	Yes (front)		

DIMENSIONAL



TECHNICAL SYMBOLOGY

IP

IP55

IK

IK10

STANDARDS/APPROVALS

