




Wide range of surface-mounting and flush-mounting boxes for domestic ranges with high mechanical robustness and accessories supplied: dividers, junction elements, mortarguard shield, etc. Completing the range, the distribution outlet boxes for floor-mounting installations can be personalised in terms of capacity, external design finish, and internal fittings (they take both System range components and DIN rail devices).

Aant. modules	8 modules (4+4)	IP-graad	IP40
Type	Voor stenen muren	Gloeidraadtest	650 °C
Categorie	Voor huishoudelijke serie	Thermodruk met kogel	70 °C
In overeenstemming met normen	EN 60670-1 (CEI 23-48)	Buitenste afm. LxHxD (mm)	131 x 129 x 53
Materiaal	GW PLAST Technopolymer	Bevestigingssteunen asafstand	108.5 mm
Halogeen vrij	Halogeen vrij conform EN 60754-2	Cable entries	4 x Ø 20/25/32 + 4 x Ø 20/25 + 4 x Ø 25/32 cut-outs
Kleur	Orange RAL 2001	Type of cut-outs	Verwijderbaar met gereedschap
Installatie temperatuur	-15 +60 °C		

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Not resistant	Not resistant	Limited resistance	Limited resistance	Not resistant	Not resistant	Not resistant	Limited resistance	Limited resistance	Limited resistance

DIMENSIONAL

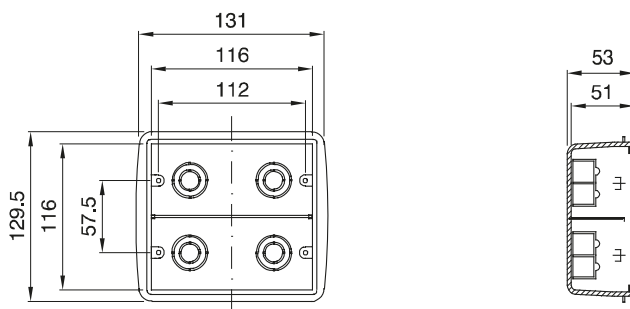

TECHNICAL SYMBOLOGY

GWT

650 °C



70 °C

HF

Halogeen vrij conform
EN 60754-2

STANDARDS/APPROVALS

