




Wide range of surface-mounting and flush-mounting boxes for domestic ranges with high mechanical robustness and accessories supplied: dividers, junction elements, mortarguard shield, etc. Completing the range, the distribution outlet boxes for floor-mounting installations can be personalised in terms of capacity, external design finish, and internal fittings (they take both System range components and DIN rail devices).

|                               |                                  |                               |                                    |
|-------------------------------|----------------------------------|-------------------------------|------------------------------------|
| Aant. modules                 | 2 modules sectionaal             | IP-graad                      | IP40                               |
| Type                          | Voor stenen muren                | Gloeidraadtest                | 650 °C                             |
| Categorie                     | Voor huishoudelijke serie        | Thermodruk met kogel          | 70 °C                              |
| In overeenstemming met normen | EN 60670-1 (CEI 23-48)           | Buitenste afm. LxHxD (mm)     | 70 x 70 x 50                       |
| Materiaal                     | GW PLAST Technopolymer           | Bevestigingssteunen asafstand | 60 mm                              |
| Halogeen vrij                 | Halogeen vrij conform EN 60754-2 | Cable entries                 | 2 x Ø 16/20 + 8 x Ø 20/25 cut-outs |
| Kleur                         | Orange RAL 2001                  | Type of cut-outs              | Verwijderbaar met gereedschap      |
| Installatie temperatuur       | -15 +60 °C                       |                               |                                    |

#### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

| Saline solution | Acids         |               | Bases              |                    | Solvents      |               |               |                    | Mineral oil        | UV rays            |
|-----------------|---------------|---------------|--------------------|--------------------|---------------|---------------|---------------|--------------------|--------------------|--------------------|
|                 | Concentrated  | Diluted       | Concentrated       | Diluted            | Hexane        | Benzol        | Acetone       | Ethyl alcohol      |                    |                    |
| Resistant       | Not resistant | Not resistant | Limited resistance | Limited resistance | Not resistant | Not resistant | Not resistant | Limited resistance | Limited resistance | Limited resistance |

#### DIMENSIONAL

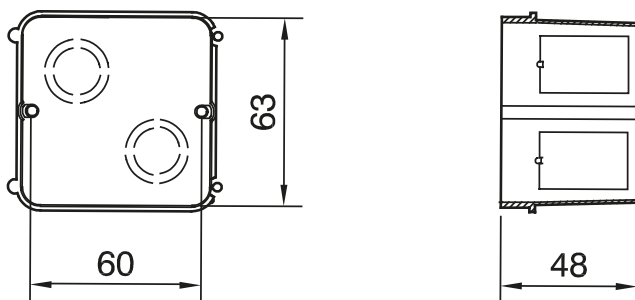

#### TECHNICAL SYMBOLOGY

**GWT**

650 °C



70 °C

**HF**

Halogeen vrij conform  
EN 60754-2

#### STANDARDS/APPROVALS

