




The transponder card holder unit allows the recognition of cards with RFID-MIFARE® transponder technology (use cards from the Gewiss catalogue). Card recognition is reported to the GW-HOST hotel access control and management software.

The device is equipped with 2 inputs for potential-free contacts and 2 NO relay outputs for SELV circuits. The inputs can be used to detect the status of sensors or to send on/off and toggle commands, dimming commands (1 or 2 buttons), shutter commands, sequence commands, scenario commands, short/long press commands; the pulse counter function is also available. The outputs can control generic loads on, off, timed on, with flashing. The device implement advanced logical functions and the "Virtual holder" function.

Kategorie	Transponder card holder unit MIFARE®	Farbe	Titan
Material	Front plate in technopolymer (included)	Installation	Flush mounting on 3-modules rectangular (GW24403, GW24403PM), round (GW24234, GW24234PM) or square (GW24231) boxes
Spannungsversorgung	SELV: 12-24 Vac 50/60Hz, 12-32 Vdc	Current absorbed by power supply	30 mA a 24 V dc
Schnittstellen	KNX TP1	Current absorbed by KNX bus (mA)	Max 10 mA a 29 V
Technologie	Trasponder RFID-MIFARE®	Anzahl Ausgangskanäle	2
Ausgangs- kontakt	Max switching voltage 30Vdc / 24Vac Max switching current 5A(AC1) 1A (AC3)	Anzahl Eingangskanäle	2
Eingangs- spannung	Potential free	Anschlussklemmen	Mit Schrauben
Anschluss feindrätig (mm²)	Max. 1,5	Anschluss massiv (mm²)	Max. 1,5
Betriebs- temperatur	-5 ÷ +45 °C	Relative Luftfeuchtigkeit (nicht kondensierend)	Max 90%
Lagertemperatur	-5 ÷ +55 °C	Connection to the KNX bus	KNX bus terminal
Abmessungen BxHxT (mm)	110,0x78,0x12,1	Schutzart	IP20 (mit montierten Rahmen)
Norm	Directive RED 2014/53/UE; Directive RoHS 2011/65/EU + 2015/863; EN 63044-3; EN 63044-5-1; EN 63044-5-2; EN 300 330; EN 301 489-3; EN IEC 63000		

Abmessungen

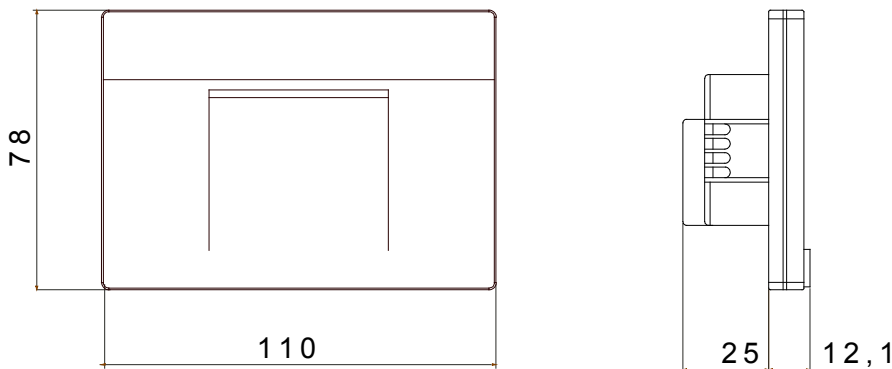

Technische Symbole

IP

IP20 (mit montierten Rahmen)

Normen / Richtlinien

