



Beschreibung Interruttore automatico scatolato

Artikelnr. MSX 400

Anz. Pole 3P

Bemessungs- strom 400 A

Auslöser Elettromeccanico


ELECTRICAL CHARACTERISTICS

Norm	IEC/EN 60947-2	Ausführung	Fisso - Rimovibile
Kategorie	A	DIN rail mounting	Nein
Bemessungs- frequenz (Hz)	50 / 60	Accessoriabile con comando motore	Si
Rated operating voltage (Ue)	690 Vac - 250 Vdc	Compatible interlock	Lever – Cable
Bemessungsstoß- spannungsfestigkeit (Uimp)	8 kV	Terminals supplied	Vorderseitige FC
Überspannungs- kategorie	IV	Position Montage	Jeder
Isolationsspannung (Ui)	800 V	Upline/downline power supply	Si
Thermal regulation	0,63 - 0,8 - 1 x In	Electrical life (415Vac)	4.500 cicli
Magnetic regulation	6 - 8 - 10 - 12 x In	Mechanical life	15.000 cicli
Neutral protection	-	Betriebstemperatur	-5°C +65°C
Total power loss	67.2 W	Lagertemperatur	-20° +65°
Rated short-circuit current making capacity (Icm)	-	Gewicht (kg)	4.3
Rated short-time withstand current for 0,3s (Icw)	-	Breite	140 mm
I _{dn} regulation	-	Höhe	260 mm
DT regulation	-	Tiefe	103 mm

SERVICE BREAKING CAPACITY (ICU)

220/240Vac	50 kA	220/240Vac	50 kA
400/415Vac	36 kA	400/415Vac	36 kA
440Vac	30 kA	440Vac	30 kA
525Vac	22 kA	525Vac	22 kA
690Vac	15 kA	690Vac	15 kA
250Vdc	40 kA	250Vdc	40 kA

Abmessungen

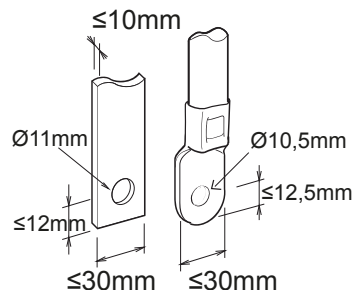



Produktdatenblatt

GWD9361

Baureihe MSX

Normen / Richtlinien

