



Beschreibung Interruttore non automatico scatolato

Artikelnr. MSXM 630

Anz. Pole 4P

Bemessungs- strom 630 A

Auslöser -

ELECTRICAL CHARACTERISTICS

| | |
|---|-------------------|
| Norm | IEC/EN 60947-2 |
| Kategorie | AC-23A, DC-22A |
| Bemessungs- frequenz (Hz) | 50 / 60 |
| Rated operating voltage (Ue) | 690 Vac - 250 Vdc |
| Bemessungsstoß- spannungsfestigkeit (Uimp) | 8 kV |
| Überspannungs- kategorie | IV |
| Isolationsspannung (Ui) | 800 V |
| Thermal regulation | - |
| Magnetic regulation | - |
| Neutral protection | - |
| Total power loss | 158.76 W |
| Rated short-circuit current making capacity (Icm) | 9 |
| Rated short-time withstand current for 0,3s (Icw) | 5 kA |
| I _{dn} regulation | - |
| DT regulation | - |

SERVICE BREAKING CAPACITY (ICU)

| |
|------------|
| 220/240Vac |
| 400/415Vac |
| 440Vac |
| 525Vac |
| 690Vac |
| 250Vdc |


MECHANICAL CHARACTERISTICS

| | |
|-----------------------------------|--------------------|
| Ausführung | Fisso - Rimovibile |
| DIN rail mounting | Nein |
| Accessoriabile con comando motore | Si |
| Compatible interlock | Lever - Cable |
| Terminals supplied | Vorderseitige FC |
| Position Montage | Jeder |
| Upline/downline power supply | Si |
| Electrical life (415Vac) | 4.500 cicli |
| Mechanical life | 15.000 cicli |
| Betriebstemperatur | -5°C +65°C |
| Lagertemperatur | -20° +65° |
| Gewicht (kg) | 5.8 |
| Breite | 185 mm |
| Höhe | 260 mm |
| Tiefe | 103 mm |

RATED BREAKING CAPACITY (ICS)

| | |
|------------|---|
| 220/240Vac | - |
| 400/415Vac | - |
| 440Vac | - |
| 525Vac | - |
| 690Vac | - |
| 250Vdc | - |

Abmessungen

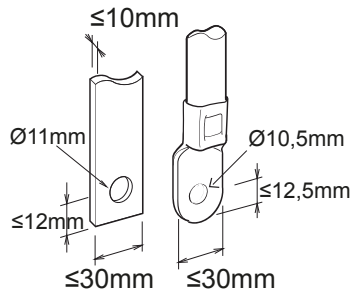



Produktdatenblatt

GWD9448

Baureihe MSX

Normen / Richtlinien

