



Description Interruttore automatico scatolato

Code MSXD 160

Nombre de pôles 3P+N

Courant nominal 160 A

Déclencheur Elettromeccanico


#### ELECTRICAL CHARACTERISTICS

ELECTRICAL CHARACTERISTICS		MECHANICAL CHARACTERISTICS	
Norme	IEC/EN 60947-2	Exécution	Fixe
Catégorie d'utilisation	A	DIN rail mounting	Si, tramite accessorio
Fréquence nominale (Hz)	50 / 60	Accessoriabile con comando motore	Si
Rated operating voltage (Ue)	525 Vac	Compatible interlock	-
Tension nominale tenue à l'impulsion (Uimp)	8 kV	Terminals supplied	FC avant
Catégorie de surtension	IV	Position de montage	Tout
Tension d'isolement (Ui)	525 V	Upline/downline power supply	Si
Thermal regulation	0,63 - 0,8 - 1 x In	Electrical life (415Vac)	10.000 cycles
Magnetic regulation	Fixed - 2.080 A	Mechanical life	10.000 cycles
Neutral protection	Non protetto	Température d'utilisation	-5°C +65°C
Total power loss	48.12 W	Température de stockage	-20° +65°
Rated short-circuit current making capacity (Icm)	-	Poids (kg)	1.9
Rated short-time withstand current for 0,3s (Icw)	-	Largeur	140 mm
I <sub>dn</sub> regulation	0,03 - 0,1 - 0,3 - 0,5 - 1 - 3 A	Hauteur	165 mm
DT regulation	0 - 60 - 200 - 400 - 700 ms	Profondeur	68 mm

#### SERVICE BREAKING CAPACITY (ICU)

SERVICE BREAKING CAPACITY (ICU)		RATED BREAKING CAPACITY (ICS)	
220/240Vac	65 kA	220/240Vac	65 kA
400/415Vac	36 kA	400/415Vac	36 kA
440Vac	25 kA	440Vac	25 kA
525Vac	25 kA	525Vac	25 kA
690Vac	-	690Vac	-
250Vdc	-	250Vdc	-

### DIMENSIONS

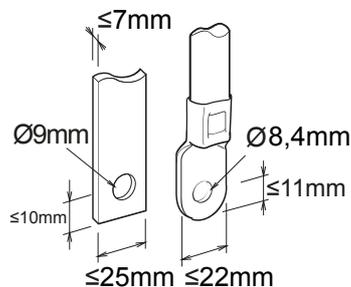



Fiche produit

GWD9277

Gamme MSX

NORMES ET HOMOLOGATIONS

