Product Data Sheet

GWA9326


Home&Building Pro



KNX Secure dimmer actuator for CVD LEDs (constant voltage control) DIN rail mounting for adjusting the brightness for max. 4 single colour LEDs or LED RGB[W] strips and spotlights. The dimmer actuators are powered by the BUS line and are equipped with 4 two-toned front LEDs that indicate the status of the outputs, 4 front control button keys for testing the outputs, 1 red LED for signalling any faults, 1 relay contact for controlling the network voltage of the LED auxiliary power supply, 4 independent output channels.

Kategorie	Řada ChoruSmart	Typ	Command devices
Skupina	Aktuátory KNX na lištu DIN	Kategorie	Stmívače
Typ řízení	CVD	Komunikace	KNX Secure
Počet modulů DIN	4	Zdroj napájení	Via KNX BUS, 29 V DC SELV
Rozhraní	KNX TP1	Proud absorbovaný sběrnicí KNX (mA)	Max. 10 mA při 29 V
Rozptýlený výkon (W)	4	Auxiliary power supply	12-24 V DC
Počet výstupních kanálů	4	Max. dodávaný proud	3 A using all channels, 4 A using 3 channels max.
Zapojovací svorky	Se šroubem	Kapacita utahování svorek pletené kabely (mm²)	Max. 2,5
Připojení na sběrnici KNX	Sběrnicová svorka KNX	Implementation elements	1 6 A relay contact for controlling the mains voltage of the LED auxiliary power supply
Pracovní teplota	-5 - +45 °C	Teplota skladování	-25 ÷ +55 °C
Krytí IP	IP20	Relativní vlhkost (nekondenzující)	Max. 93 %
Norma	RoHS Directive 2011/65/EU+2015/863 - EN IEC 63000 Low Voltage Directive 2014/35/EU_x000D_; Electromagnetic Compatibility Directive 2014/30/EU EN 60669-2-1		

DIMENSIONAL

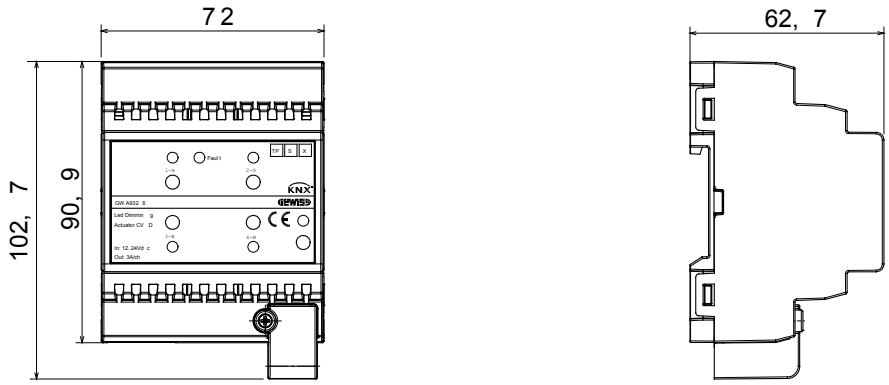

TECHNICAL SYMBOLOGY

IP

IP20

STANDARDS/APPROVALS

GEWISS S.p.A. Via Domenico Bosatelli 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 17/11/2026

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice