



Beschreibung Interruttore automatico scatolato

Artikelnr. MSXE 630

Anz. Pole 4P

Bemessungs- strom 630 A

Auslöser elektronisch

ELECTRICAL CHARACTERISTICS


Norm	IEC/EN 60947-2	Ausführung	Fisso - Rimovibile
Kategorie	A	DIN rail mounting	Nein
Bemessungs- frequenz (Hz)	50 / 60	Accessoriabile con comando motore	Si
Rated operating voltage (Ue)	690 Vac	Compatible interlock	Lever – Cable
Bemessungsstoß- spannungsfestigkeit (Uimp)	8 kV	Terminals supplied	Vorderseitige FC
Überspannungs- kategorie	IV	Position Montage	Jeder
Isolationsspannung (Ui)	800 V	Upline/downline power supply	Si
Thermal regulation	0,4 - 0,5 - 0,63 - 0,8 - 0,85 - 0,9 - 0,95 - 1 x In	Electrical life (415Vac)	4.500 cicli
Magnetic regulation	Electronic LSI	Mechanical life	15.000 cicli
Neutral protection	50% - 100% x Ir	Betriebstemperatur	-5°C +65°C
Total power loss	158.76 W	Lagertemperatur	-20° +65°
Rated short-circuit current making capacity (Icm)	-	Gewicht (kg)	6.5
Rated short-time withstand current for 0,3s (Icw)	-	Breite	185 mm
I _{dn} regulation	-	Höhe	260 mm
DT regulation	-	Tiefe	103 mm

SERVICE BREAKING CAPACITY (ICU)

220/240Vac	50 kA	220/240Vac	50 kA
400/415Vac	36 kA	400/415Vac	36 kA
440Vac	25 kA	440Vac	25 kA
525Vac	15 kA	525Vac	15 kA
690Vac	10 kA	690Vac	10 kA
250Vdc	-	250Vdc	-

RATED BREAKING CAPACITY (ICS)

Abmessungen

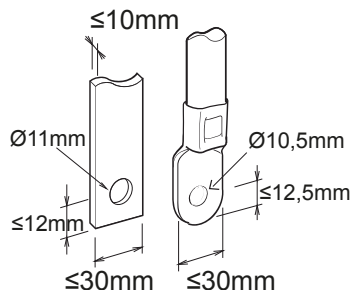



Produktdatenblatt

GWD9384

Baureihe MSX

Normen / Richtlinien

