



Beschreibung Interruttore automatico scatolato

Artikelnr. MSXD 160

Anz. Pole 3P+N

Bemessungs- strom 160 A

Auslöser Elettromeccanico


#### ELECTRICAL CHARACTERISTICS

ELECTRICAL CHARACTERISTICS		MECHANICAL CHARACTERISTICS	
Norm	IEC/EN 60947-2	Ausführung	Fest
Kategorie	A	DIN rail mounting	Si, tramite accessorio
Bemessungs- frequenz (Hz)	50 / 60	Accessoriabile con comando motore	Si
Rated operating voltage (Ue)	525 Vac	Compatible interlock	-
Bemessungsstoß- spannungsfestigkeit (Uimp)	8 kV	Terminals supplied	Vorderseitige FC
Überspannungs- kategorie	IV	Position Montage	Jeder
Isolationsspannung (Ui)	525 V	Upline/downline power supply	Si
Thermal regulation	0,63 - 0,8 - 1 x In	Electrical life (415Vac)	10.000 cycles
Magnetic regulation	Fixed - 2.080 A	Mechanical life	10.000 cycles
Neutral protection	Non protetto	Betriebstemperatur	-5°C +65°C
Total power loss	48.12 W	Lagertemperatur	-20° +65°
Rated short-circuit current making capacity (Icm)	-	Gewicht (kg)	1.9
Rated short-time withstand current for 0,3s (Icw)	-	Breite	140 mm
I <sub>dn</sub> regulation	0,03 - 0,1 - 0,3 - 0,5 - 1 - 3 A	Höhe	165 mm
DT regulation	0 - 60 - 200 - 400 - 700 ms	Tiefe	68 mm

#### SERVICE BREAKING CAPACITY (ICU)

SERVICE BREAKING CAPACITY (ICU)		RATED BREAKING CAPACITY (ICS)	
220/240Vac	35 kA	220/240Vac	27 kA
400/415Vac	25 kA	400/415Vac	19 kA
440Vac	15 kA	440Vac	12 kA
525Vac	10 kA	525Vac	7,5 kA
690Vac	-	690Vac	-
250Vdc	-	250Vdc	-

### Abmessungen

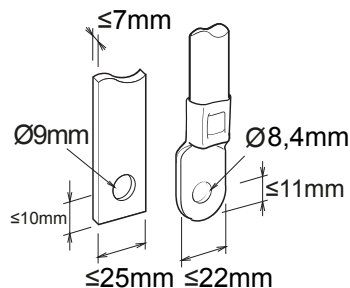



Produktdatenblatt

GWD9557

Baureihe MSX

Normen / Richtlinien

