




The transponder card holder unit allows the recognition of cards with RFID-MIFARE® transponder technology (use cards from the Gewiss catalogue). Card recognition is reported to the GW-HOST hotel access control and management software.

The device is equipped with 2 inputs for potential-free contacts and 2 NO relay outputs for SELV circuits. The inputs can be used to detect the status of sensors or to send on/off and toggle commands, dimming commands (1 or 2 buttons), shutter commands, sequence commands, scenario commands, short/long press commands; the pulse counter function is also available. The outputs can control generic loads on, off, timed on, with flashing. The device implement advanced logical functions and the "Virtual holder" function.

| | | | |
|---|--|---|--|
| Categoría | Transponder card holder unit MIFARE® | Color | Negro |
| Material | Front plate in technopolymer (included) | Instalación | Flush mounting on 3-modules rectangular (GW24403, GW24403PM), round (GW24234, GW24234PM) or square (GW24231) boxes |
| Alimentación | SELV: 12-24 Vac 50/60Hz, 12-32 Vdc | Current absorbed by power supply | 30 mA a 24 V dc |
| Interface | KNX TP1 | Current absorbed by KNX bus (mA) | Max 10 mA a 29 V |
| Tecnología | Trasponder RFID-MIFARE® | N. canales de salida | 2 |
| Contactos de salida | Max switching voltage 30Vdc / 24Vac Max switching current 5A(AC1) 1A (AC3) | N. canales de entrada | 2 |
| Tensión entrada | Potential free | Regleta de cableado | De tornillo |
| Capacidad de apriete cable flexible (mm²) | Max. 1,5 | Capacidad de apriete cable rígido (mm²) | Max. 1,5 |
| Temperatura de funcionamiento | -5 ÷ +45 °C | Humedad relativa (no condensación) | Max 90% |
| Temperatura de almacenaje | -5 ÷ +55 °C | Connection to the KNX bus | KNX bus terminal |
| Dimensiones BxHxP (mm) | 110,0x78,0x12,1 | Grado de protección | IP20 (montaje en placa) |
| Norma de referencia | Directive RED 2014/53/UE; Directive RoHS 2011/65/EU + 2015/863; EN 63044-3; EN 63044-5-1; EN 63044-5-2; EN 300 330; EN 301 489-3; EN IEC 63000 | | |

DIMENSIONAL

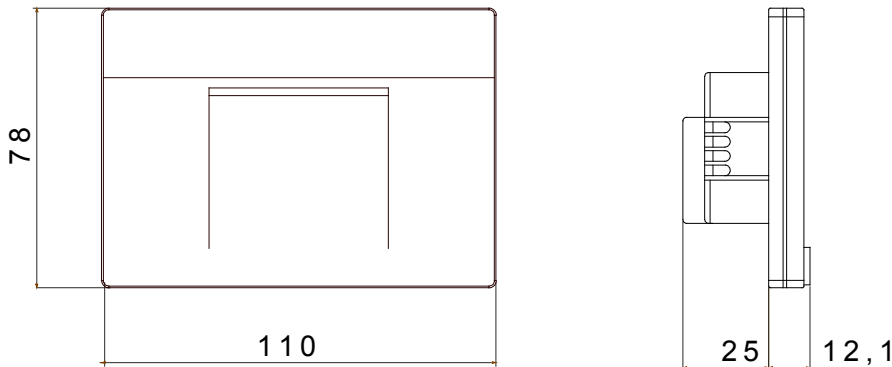

SIMBOLOGÍA TÉCNICA

IP

IP20 (montaje en placa)

MARCAS/APROBACIONES

