



Descripción Interruttore automatico scatolato
 Código MSX 400
 N° polos 4P
 Corriente nominal 400 A
 Disparador Elettromeccanico

ELECTRICAL CHARACTERISTICS

Norma de referencia	IEC/EN 60947-2
Categoría de uso	A
Frecuencia nominal (Hz)	50 / 60
Rated operating voltage (Ue)	690 Vac - 250 Vdc
Tensión nominal de tensión soportada (Uimp)	8 kV
Categoría de sobretensiones	IV
Tensión de aislamiento (Ui)	800 V
Thermal regulation	0,63 - 0,8 - 1 x In
Magnetic regulation	6 - 8 - 10 - 12 x In
Neutral protection	100% x Ir
Total power loss	89.59999999999999 W
Rated short-circuit current making capacity (Icm)	-
Rated short-time withstand current for 0,3s (Icw)	-
Idn regulation	-
DT regulation	-

SERVICE BREAKING CAPACITY (ICU)

220/240Vac	85 kA
400/415Vac	50 kA
440Vac	45 kA
525Vac	30 kA
690Vac	20 kA
250Vdc	40 kA


MECHANICAL CHARACTERISTICS

Ejecución	Fisso - Rimovibile
DIN rail mounting	No
Accessorabile con comando motore	Si
Compatible interlock	Lever - Cable
Terminals supplied	Delantero FC
Posición de montaje	Cualquier
Upline/downline power supply	Si
Electrical life (415Vac)	4.500 cicli
Mechanical life	15.000 cicli
Temperatura de empleo	-5°C +65°C
Temperatura de almacenaje	-20° +65°
Peso (kg)	5.6
Ancho	185 mm
Altura	260 mm
Profundidad	103 mm

RATED BREAKING CAPACITY (ICS)

220/240Vac	85 kA	220/240Vac	85 kA
400/415Vac	50 kA	400/415Vac	50 kA
440Vac	45 kA	440Vac	45 kA
525Vac	30 kA	525Vac	30 kA
690Vac	20 kA	690Vac	15 kA
250Vdc	40 kA	250Vdc	40 kA

DIMENSIONAL

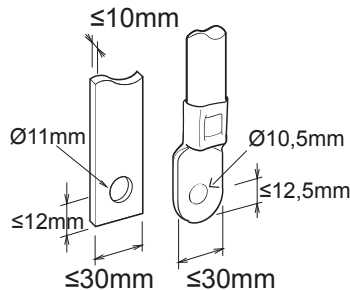



Ficha Técnica Producto

GWD9367

Gama MSX

MARCAS/APROBACIONES

