




Description Interruttore automatico scatolato  
Code MSX 400  
Nombre de pôles 3P  
Courant nominal 400 A  
Déclencheur Elettromeccanico

| ELECTRICAL CHARACTERISTICS                        |                      | MECHANICAL CHARACTERISTICS        |                    |
|---|----------------------|-----------------------------------|--------------------|
| Norme   | IEC/EN 60947-2       | Exécution                         | Fisso - Rimovibile |
| Catégorie d'utilisation                           | A                    | DIN rail mounting                 | Non                |
| Fréquence nominale (Hz)                           | 50 / 60              | Accessoriabile con comando motore | Si                 |
| Rated operating voltage (Ue)                      | 690 Vac - 250 Vdc    | Compatible interlock              | Lever - Cable      |
| Tension nominale tenue à l'impulsion (Uimp)       | 8 kV                 | Terminals supplied                | FC avant           |
| Catégorie de surtension                           | IV                   | Position de montage               | Tout               |
| Tension d'isolement (Ui)                          | 800 V                | Upline/downline power supply      | Si                 |
| Thermal regulation                                | 0,63 - 0,8 - 1 x In  | Electrical life (415Vac)          | 4.500 cicli        |
| Magnetic regulation                               | 6 - 8 - 10 - 12 x In | Mechanical life                   | 15.000 cicli       |
| Neutral protection                                | -                    | Température d'utilisation         | -5°C +65°C         |
| Total power loss                                  | 67.2 W               | Température de stockage           | -20° +65°          |
| Rated short-circuit current making capacity (Icm) | -                    | Poids (kg)                        | 4.3                |
| Rated short-time withstand current for 0,3s (Icw) | -                    | Largeur                           | 140 mm             |
| I <sub>dn</sub> regulation                        | -                    | Hauteur                           | 260 mm             |
| DT regulation                                     | -                    | Profondeur                        | 103 mm             |
| SERVICE BREAKING CAPACITY (ICU)                   |                      | RATED BREAKING CAPACITY (ICS)     |                    |
| 220/240Vac  | 85 kA                | 220/240Vac                        | 85 kA              |
| 400/415Vac  | 50 kA                | 400/415Vac                        | 50 kA              |
| 440Vac  | 45 kA                | 440Vac                            | 45 kA              |
| 525Vac  | 30 kA                | 525Vac                            | 30 kA              |
| 690Vac  | 20 kA                | 690Vac                            | 15 kA              |
| 250Vdc  | 40 kA                | 250Vdc                            | 40 kA              |

### DIMENSIONS

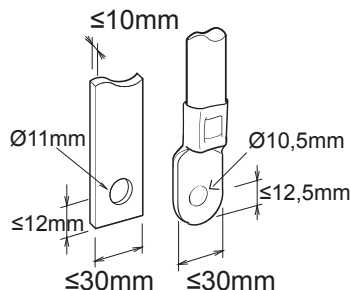



Fiche produit

**GWD9365**

Gamme MSX

NORMES ET HOMOLOGATIONS

