





The transponder card reader unit allows the recognition of cards with RFID-MIFARE® transponder technology (use cards from the Gewiss catalogue). Card recognition is reported to the GW-HOST hotel access control and management software.

The device is equipped with 2 inputs for potential-free contacts and 2 NO relay outputs for SELV circuits. The inputs can be used to detect the status of sensors or to send on/off and toggle commands, dimming commands (1 or 2 buttons), shutter commands, sequence commands, scenario commands, short/long press commands; the pulse counter function is also available. The outputs can control generic loads on, off, timed on, with flashing. The device implement advanced logical functions and the "Virtual holder" function.

קטגוריה	Transponder card reader unit MIFARE®	צבע	טיטניום
Material	Front plate in technopolymer (included)	התקנה	Flush mounting on 3-modules rectangular (GW24403, GW24403PM), round (GW24234, GW24234PM) or square (GW24231) boxes
ספק כוח	SELV: 12-24 Vac 50/60Hz, 12-32 Vdc	Current absorbed by power supply	30 mA a 24 V dc
ממשקים	KNX TP1	Current absorbed by KNX bus (mA)	Max 10 mA a 29 V
טכנולוגיה	Trasponder RFID-MIFARE®	מס' יציאה ערוצים	2
יציאה	Max switching voltage 30Vdc / 24Vac	מס' כניסה	2
מגעים	Max switching current 5A(AC1) 1A (AC3)	ערוצים	
כניסה מתח	Potential free	מהדקי חיווט	עם בורג
יכולת הידוק מהדקים (ממ"ר) כבלים תקועים	1.5 מ'קס	יכולת הידוק מהדקים (ממ"ר) כבלים קשיחים	1.5 מ'קס
פועל טמפרטורה	-5 ÷ +45 °C	(ללא עיבוי) לחות יחסית	Max 90%
טמפרטורת אחסון	-5 ÷ +55 °C	Connection to the KNX bus	KNX bus terminal
x גובהא מידות אורך (מ"מ) עומק	110,0x78,0x12,1	IP דרגה	IP20 (with plate fitted)
סטנדרט	Directive RED 2014/53/UE; Directive RoHS 2011/65/EU + 2015/863; EN 63044-3; EN 63044-5-1; EN 63044-5-2; EN 300 330; EN 301 489-3; EN IEC 63000		

DIMENSIONAL

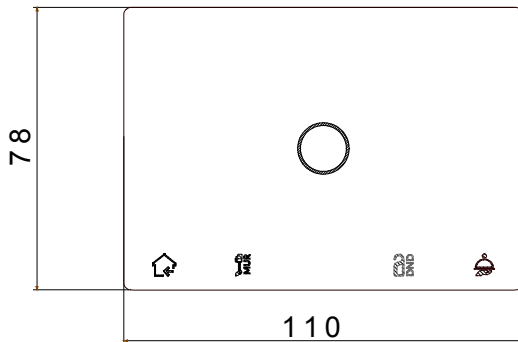

TECHNICAL SYMBOLOGY

IP

IP20 (with plate fitted)

STANDARDS/APPROVALS

