


The distribution board for construction sites type Q-BOX are designed to withstand the effects of wear, impact and the stress caused by atmosph. They come in pre-wired versions fitted with interlocked socket-outlets (with or without a fuse-holder) up to 63A, or socket-outlets type IEC 309.. The wired versions are also equipped with accessories like the emergency push-button, lockable doors, stainless steel tear-proof cable-fastening hooks, and built-in transportation handles on the upper part of the board. To ensure the best possible positioning on the construction site, 68 Q-BOX ACS boards can be surface-mounted, floor-mounted or fitted on poles.

סוג	Q-BOX 6 ACS	סוג לוח	מחווט
צבע	תכלת	x גובהא מידות חיצוניות אורך (מ"מ) עומק	914x821x400
(ק"ג)משקל	31	לפי התקנים	EN 61439-4 (ACS)
מאפיינים	עמידות לאולטרה-סגול (EN 62208)	IP	IP55
זעזוע התנגדות	IK10	בדיקת תיל ליהט	650 °C
לחץ תרמי עם כדור	70 °C	class	II
ספק כוח	פס צבירה	מס' של קטבים	3P+N+E
הספק ניתן לאספקה (kW)	17	מפסק ראשי	1RCBO 32A 4P 6 kA 0,03A - דגם AC
הגנה על מעגלים	MCB	מספר שקעים	6
שקע 2P+E	3	שקע 3P+E	2
16A - IB		16A - IB	
שקע 3P+N+E	1	לחץ חירום	ן
16A - IB			
קוד חשמלי	139		

### DIMENSIONAL

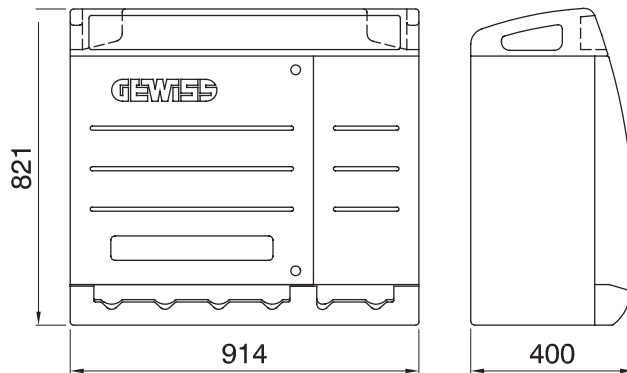


### TECHNICAL SYMBOLOGY



**IP**  
IP55

**IK**  
IK10

**GWT**  
650 °C



### STANDARDS/APPROVALS

