




The widest range of flush-mounting switchboards and distribution boards available on the market today. Seven families designed to offer solutions in the residential and advanced tertiary sectors, also available in Halogen Free material. Versions from 2 to 72 modules, degrees of protection from IP40 to IP55 and specific versions also for plasterboard. Furthermore, the offer includes Multimedia Enclosures in compact (36 modules) and complete (54 modules) versions, both compliant with what is suggested by the CEI 306-2 guide.

Klasa Izolacji	II (zgodnie z normami IEC 61140)	Kolor	Czerny toner
Śred. zewn. LxHxD (mm)	248x195x107	Ochrona IP	IP40
Montaż	Obudowy do montażu podtynkowego	Moc rozpraszalna (W)	19
Odporność na wstrząsy	IK08	Prąd wyjściowe	400 V
Drzwiczki Kolor	Przezroczysty przydymiony	Liczba modułów EN 50022	8+1/2
Prąd roboczy	125 A	Próba rozżarzoną drutem	650 °C
Do ścian	Murowany	Temperatura robocza	-15 ÷ +60°C
Rodzaj materiału	Bezhalogenowe zgodnie z normą EN 50267-2-2	Electrocod	-
Twardość kulkowa	70 °C	Norma	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49
Izolacja wyjściowe	750 V	Maks. montowalna Bloki zaciskowe	1 x 8 modułów

DIMENSIONAL

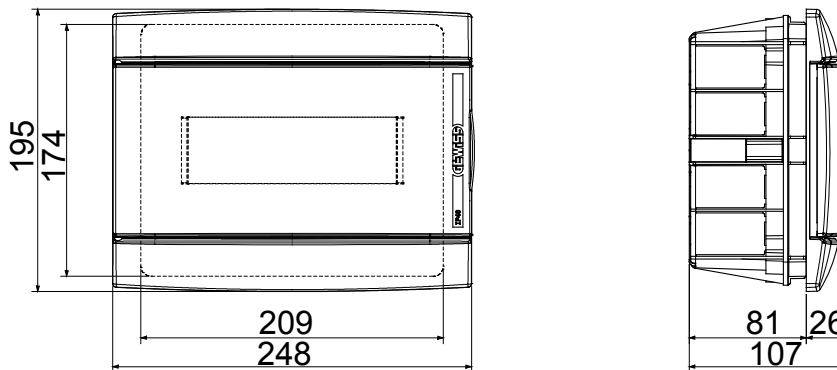

TECHNICAL SYMBOLOGY



STANDARDS/APPROVALS

