



Flush-mounting auxiliary touch module with one command.

Two touch areas on the front, this product can be used in combination with the auxiliary wired inputs of the following devices of the Chorusmart range: connected commands, connected 1- channel On/Off actuator, connected movement sensors, TOUCH and EVO commands, or as a wired command for a connected 2-channel ZigBee interface.

The device must be completed with one of the ICE Touch plates available. Inside the package of the plates is a sheet of interchangeable icons to customize the control symbol.

Descriere	Auxiliary touch 1-command module	Alimentare electrică	100 ÷ 240 V c.a. - 50/60 Hz
Nr. module	1	Nr. canale de intrare	-
Comandă locală	Via 2 frontal touch areas (must be completed with ICE Touch plate)	Tensiune canal intrare auxiliară	-
Temperatura de stocare	-25 ÷ +70 °C	Nr. canale de ieșire	1
Temperatura de lucru	-5 ÷ +45 °C	Contacte ieșire	-
Umiditate relativă (necondensată)	Max. 93%	Lămpi cu halogen incandescent de 240 V c.a.	-
Semnalizare cu lumină frontală	LED albastru	Lămpi LED de 240 V c.a.	-
Borne de cablare	Conținut	Sarcini pilotate de la transformatoare electronice 240 V c.a.	-
Capacitate de strângere borne cabluri torsadate (mm <sup>2</sup> )	Max 1,5	Lămpi fluorescente de 240 V	-
Capacitate de strângere a bornelor cabluri solide (mm <sup>2</sup> )	Max 1,5	Controlul sarcinii	-
Context	Dry indoor places	Acoustic signalling element	Buzzer
Grad IP	IP20 (with plate fitted)	Standard	2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000

### DIMENSIONAL

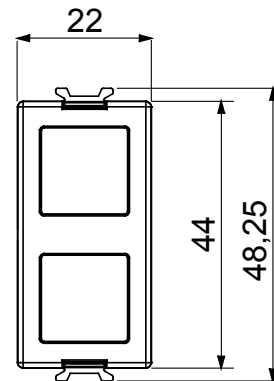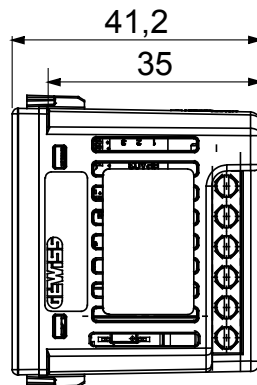

### TECHNICAL SYMBOLOGY

## IP

IP20 (with plate fitted)

### STANDARDS/APPROVALS

