




Flush-mounting auxiliary touch module with two commands. Two axial touch areas on the front; this product can be used in combination with the auxiliary wired inputs of the following devices of the Chorusmart range: connected commands, connected 1- channel On/Off actuator, connected movement sensors, TOUCH and EVO commands, or as a wired command for a connected 2-channel ZigBee interface. The device must be completed with one of the ICE Touch plates available. Inside the package of the plates is a sheet of interchangeable icons to customize the control symbol.

Descriere	Auxiliary touch 2-commands module	Alimentare electrică	100 ÷ 240 V c.a. - 50/60 Hz
Nr. module	1	Nr. canale de intrare	-
Comandă locală	Via 2 frontal touch areas (must be completed with ICE Touch plate)	Tensiune canal intrare auxiliară	-
Temperatura de stocare	-25 ÷ +70 °C	Nr. canale de ieșire	2
Temperatura de lucru	-5 ÷ +45 °C	Contacte ieșire	-
Umiditate relativă (necondensată)	Max. 93%	Lămpi cu halogen incandescent de 240 V c.a.	-
Semnalizare cu lumină frontală	LED albastru	Lămpi LED de 240 V c.a.	-
Borne de cablare	Conținut	Sarcini pilotate de la transformatoare electronice 240 V c.a.	-
Capacitate de strângere borne cabluri torsadate (mm <sup>2</sup> )	Max 1,5	Lămpi fluorescente de 240 V	-
Capacitate de strângere a bornelor cabluri solide (mm <sup>2</sup> )	Max 1,5	Controlul sarcinii	-
Context	Dry indoor places	Acoustic signalling element	Buzzer
Grad IP	IP20 (with plate fitted)	Standard	2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000

### DIMENSIONAL

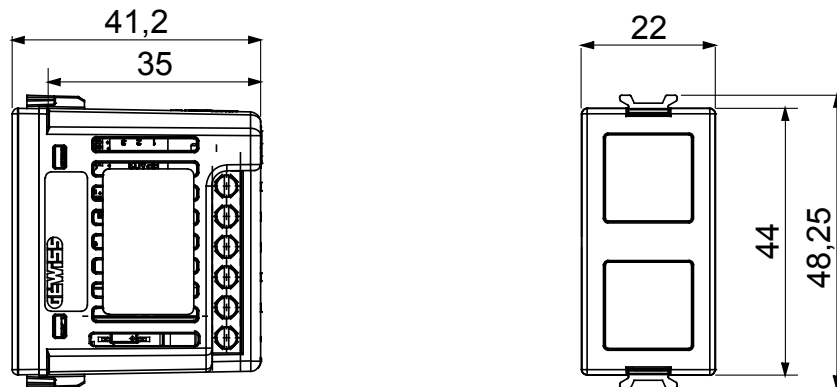

### TECHNICAL SYMBOLOGY

**IP**

IP20 (with plate fitted)

### STANDARDS/APPROVALS

