


Flush-mounting touch dimmer module. Two touch areas on the front for switching the connected load ON and OFF (short press) or for regulating the brightness (long press). The device must be completed with one of the ICE Touch plates available. Inside the package of the plates is a sheet of interchangeable icons to customize the control symbol. The device has N°3 DIP-switches, located on the back of the device, for feature configuration.

Descriere	Dimmer touch	Alimentare electrică	100 ÷ 240 V c.a. - 50/60 Hz
Nr. module	1	Nr. canale de intrare	2
Comandă locală	Via 2 frontal touch areas (must be completed with ICE Touch plate)	Tensiune canal intrare auxiliară	100 ÷ 240 V c.a. - 50/60 Hz
Temperatura de stocare	-25 ÷ +70 °C	Nr. canale de ieșire	1
Temperatura de lucru	-5 ÷ +45 °C	Umiditate relativă (necondensată)	Max. 93%
Lămpi cu halogen incandescent de 240 V c.a.	4 ÷ 150 W	Semnalizare cu lumină frontală	LED albastru
Lămpi LED de 240 V c.a.	4 ÷ 150W (max 5 lamps)	Borne de cablare	Conținut
Sarcini pilotate de la transformatoare electronice 240 V c.a.4 ÷ 150 VA (240 V ac)		Capacitate de strângere borne cabluri torsadate (mm²)	Max 1,5
Lămpi fluorescente de 240 V		Capacitate de strângere a bornelor cabluri solide (mm²)	Max 1,5
Controlul sarcinii	Bord de fugă	Context	Dry indoor places
Acoustic signalling element	Buzzer	Grad IP	IP20 (with plate fitted)
Standard	2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000		

DIMENSIONAL

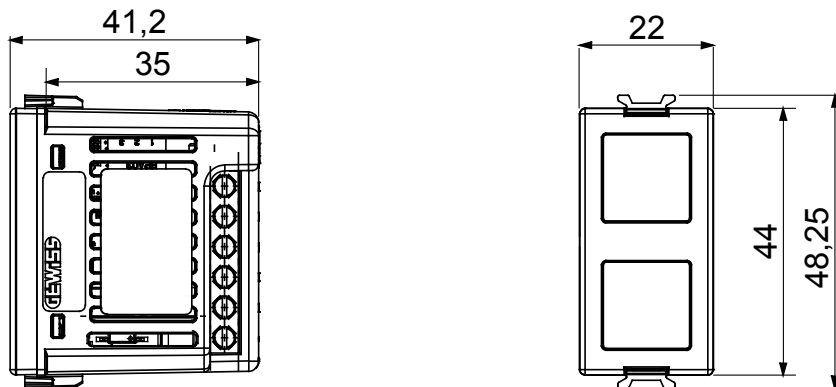

TECHNICAL SYMBOLOGY

IP

IP20 (with plate fitted)

STANDARDS/APPROVALS

