
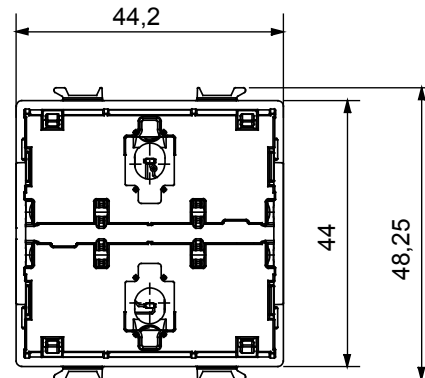


Flush-mounting axial auxiliary module with two commands. Two axial push-buttons on the front; this product can be used in combination with the auxiliary wired inputs of the following devices of the Chorusmart range: connected commands, connected 1- channel On/Off actuator, connected movement sensors, EVO commands, or as a wired command for a connected 2-channel ZigBee interface. The device must be completed with one of the front buttons key available.

Descriere	Comandă axială auxiliară cu 2 canale	Contacte ieșire	n. 2 x 1A (AC1)
Alimentare electrică	100 ÷ 240 V c.a. - 50/60 Hz	Nr. module	2
Nr. canale de ieșire	2	Standard	2014/35/EU (LVD), 2011/65/EU + 2015/863 (RoHS), EN 60669-1, EN IEC 63000
Temperatura de lucru	-5 ÷ +45 °C	Umiditate relativă (necondensată)	Max. 93%
Borne de cablare	Conținut	Capacitate de strângere borne cabluri torsadate (mm ²)	Max 1,5
Capacitate de strângere a bornelor cabluri solide (mm ²)	Max 1,5	Categorie	Comandă axială auxiliară cu 2 canale
Nr. canale de intrare	-	Grad IP	IP20 (cu buton)
Lămpi cu halogen incandescent de 240 V c.a.	-	Lămpi LED de 240 V c.a.	-
Sarcini pilotate de la transformatoare electronice 240 V c.a.	-	Culoare LED	Albastru
Comandă locală	Prin 2 butoane frontale (pentru a finaliza cu tasta buton)	Controlul sarcinii	-
Material	Tehnopolimer		

DIMENSIONAL

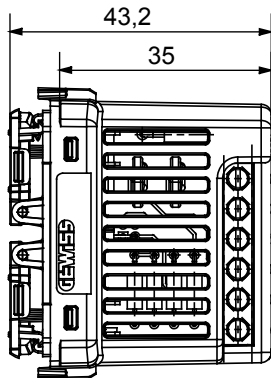

TECHNICAL SYMBOLOGY

IP

IP20 (cu buton)

STANDARDS/APPROVALS

