
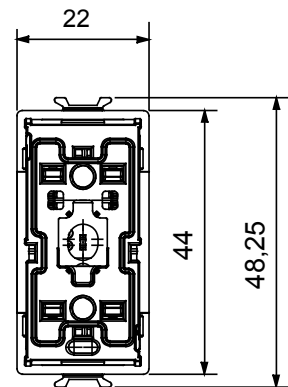


Flush-mounting axial auxiliary module with one command. An axial push-buttons on the front; this product can be used in combination with the auxiliary wired inputs of the following devices of the Chorusmart range: connected commands, connected 1- channel On/Off actuator, connected movement sensors, EVO commands, or as a wired command for a connected 2-channel ZigBee interface. The module with 1 auxiliary axial command can also be used to directly command small resistive or weakly inductive loads such as ringers and buzzers (max. 10VA);. The device must be completed with one of the front buttons key available.

Descriere	Comandă axială auxiliară cu 1 canal	Alimentare electrică	100 ÷ 240 V c.a. - 50/60 Hz
Nr. module	1	Nr. canale de intrare	-
Comandă locală	Prin intermediul butonului frontal (pentru a finaliza cu tasta buton)	Tensiune canal intrare auxiliară	-
Temperatura de stocare	-25 ÷ +70 °C	N. of LED input channels	1
Temperatura de lucru	-5 ÷ +45 °C	LED input channels voltage	100 ÷ 240 V c.a. - 50/60 Hz
Umiditate relativă (necondensată)	Max. 93%	Nr. canale de ieșire	1
Semnalizare cu lumină frontală	LED albastru	Contacte ieșire	1A (AC1)
Borne de cablare	Conținut	Lămpi cu halogen incandescent de 240 V c.a.	-
Capacitate de strângere borne cabluri torsadate (mm <sup>2</sup> )	Max 1,5	Lămpi LED de 240 V c.a.	-
Capacitate de strângere a bornelor cabluri solide (mm <sup>2</sup> )	Max 1,5	Sarcini pilotate de la transformatoare electronice 240 V c.a.	-
Context	Dry indoor places	Lămpi fluorescente de 240 V	-
Grad IP	IP20 (cu buton)	Controlul sarcinii	-
Standard	2014/35/EU (LVD), 2011/65/EU + 2015/863 (RoHS), EN 60669-1, EN IEC 63000		

## DIMENSIONAL

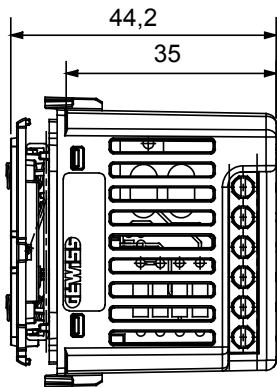

## TECHNICAL SYMBOLOGY

### IP

IP20 (cu buton)

## STANDARDS/APPROVALS

