





Led decorative recessed luminaire with die-cast aluminum body and adjustable polycarbonate shield, available in white, aluminum, gold and bronze version. Installable on panels with a minimum thickness of 5mm and a maximum of 20mm. Suitable for indoor installation, built-in power supply, IP20 protection degree and good impact resistance.

Cerere	Intern	Rezistență mecanică	IK06
Tensiune	220 - 240 V/ 50 - 60 Hz	Alimentarea sistemului	11.5 W
Greutate (kg)	0.5	Lampă	LED
Culoare	Aur	Fluxul nominal (lm)	1400
Puterea luminoasă (lm)	1100	Grad IP	IP20
Clasa de izolație	II	Tip driver	LED driver curent constant
Garanție	2 ani	Nr. de lămpi	1
Temperatura de culoare	3000 K (CRI>80)	Tipul sursei de lumină	LED - Nu poate fi înlocuit
Clasa de eficiență a LED-urilor integrate	A++ / A++	Electrocod	2419
Durată DE VIAȚĂ LED (L80B10)	45000 h		

#### DIMENSIONAL

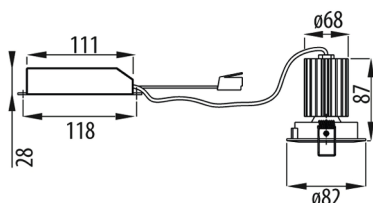

#### PHOTOMETRIC DISTRIBUTION

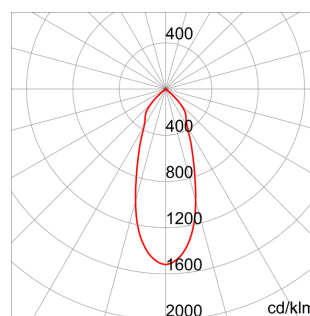

#### TECHNICAL SYMBOLOGY



IK  
IK06



IP  
IP20



CONSTANT  
CURRENT  
DRIVER

#### STANDARDS/APPROVALS

