





Recessed modular fixture suitable for interior lighting in offices and environments for the tertiary. Provided with microprismatized PMMA screen, it is the ideal solution for workstations with high visual comfort. Can also be installed in ceiling and suspended by dedicated accessories kit.

Cerere	Intern	Instalare	Carcase cu montare la nivel
Dimensiuni (mm)	600 x 600	Rezistență mecanică	IK04
Tensiune	220/240 V - 50/60 Hz - Independentă	Alimentarea sistemului	26 W
Greutate (kg)	3.1	Lampă	LED
Culoare	Alb	Puterea luminoasă (lm)	2790
Grad IP	IP20 - IP40	Clasa de izolație	II
Tip driver	LED driver	Temperatură de funcționare	-25 +40 °C
UGR	<19	Garanție	5 ani
Temperatura de culoare	4000 K (CRI>80)	Clasa de eficiență a LED-urilor integrate	A++ / A++
Electrocod	2419	Durată DE VIAȚĂ LED (L70B30)	50000 h

#### DIMENSIONAL

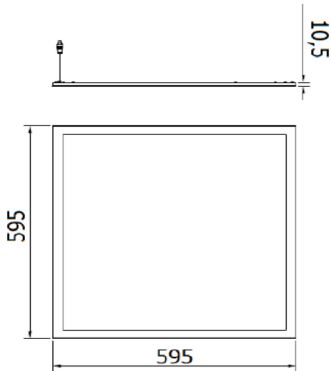

#### PHOTOMETRIC DISTRIBUTION

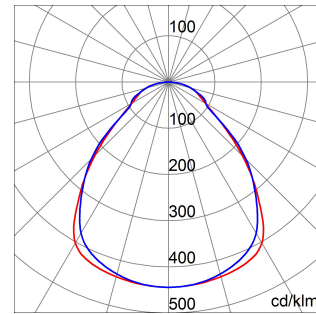

#### TECHNICAL SYMBOLOGY



IK  
IK04



IP  
IP20 - IP40



#### STANDARDS/APPROVALS

