


Flush-mounting auxiliary touch module with two commands. Two axial touch areas on the front; this product can be used in combination with the auxiliary wired inputs of the following devices of the Chorusmart range: connected commands, connected 1- channel On/Off actuator, connected movement sensors, TOUCH and EVO commands, or as a wired command for a connected 2-channel ZigBee interface. The device must be completed with one of the ICE Touch plates available. Inside the package of the plates is a sheet of interchangeable icons to customize the control symbol.

Tanım	Auxiliary touch 2-commands module	Besleme ünitesi	100 ÷ 240 V ac - 50/60 Hz
Modül sayısı	1	Giriş kanalı sayısı	-
Yerel kontrol	Via 2 frontal touch areas (must be completed with ICE Touch plate)	Auxiliary input channel voltage	-
Depolama sıcaklığı	-25 ÷ +70 °C	Çıkış kanalı kanallar	2
Kullanım sıcaklığı	-5 ÷ +45 °C	Çıkış kontakları	-
Bağıl nem (yoğuşmasız)	Maks %93	240 V ac Incandescent-halogen lamps	-
Front light signaling	Mavi led	240 V ac LED lamps	-
Kablolama terminalleri	Vidalı	Loads piloted from electronic transf. 240 V ac	-
Terminal sıkıştırma kapasitesi esnek kablolar (mm <sup>2</sup> )	Maks. 1,5	240 V Floresan lambalar	-
Terminal sıkıştırma kapasitesi sert kablolar (mm <sup>2</sup> )	Maks. 1,5	Yükleme kontrolü	-
Bağlam	Dry indoor places	Acoustic signalling element	Buzzer
IP derecesi	IP20 (with plate fitted)	Standart	2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000

### DIMENSIONAL

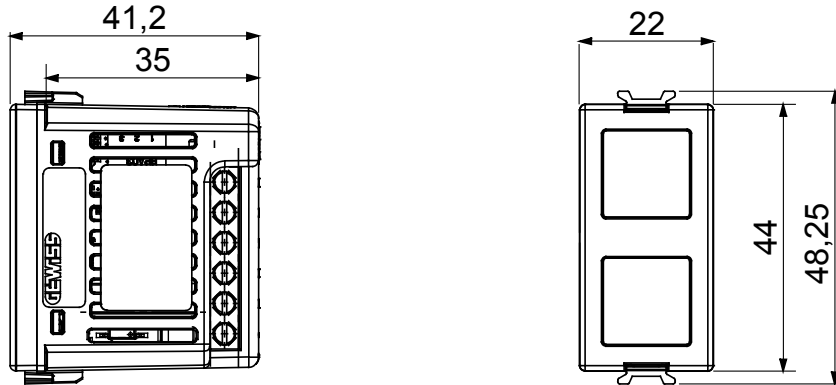

### TECHNICAL SYMBOLOGY

## IP

IP20 (with plate fitted)

### STANDARDS/APPROVALS

