



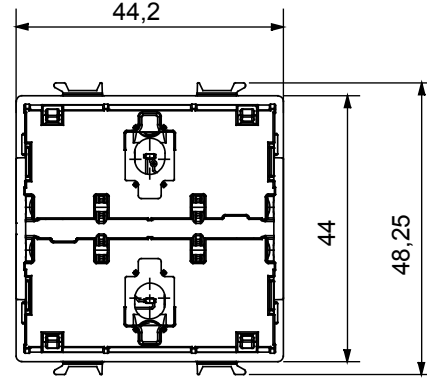

Flush-mounting axial auxiliary module with two commands. Two axial push-buttons on the front; this product can be used in combination with the auxiliary wired inputs of the following devices of the Chorusmart range: connected commands, connected 1- channel On/Off actuator, connected movement sensors, EVO commands, or as a wired command for a connected 2-channel ZigBee interface. The device must be completed with one of the front buttons key available.

Tanım	2 kanallı yardımcı eksenal kontrol	Çıkış kontaktarı	n. 2 x 1A (AC1)
Besleme ünitesi	100 ÷ 240 V ac - 50/60 Hz	Modül sayısı	2
Çıkış kanalı kanallar	2	Standart	2014/35/EU (LVD), 2011/65/EU + 2015/863 (RoHS), EN 60669-1, EN IEC 63000
Kullanım sıcaklığı	-5 ÷ +45 °C	Bağıl nem (yoğuşmasız)	Maks %93
Kablolama terminalleri	Vidalı	Terminal sıkıştırma kapasitesi esnek kablolar (mm <sup>2</sup> )	Maks. 1,5
Terminal sıkıştırma kapasitesi sert kablolar (mm <sup>2</sup> )	Maks. 1,5	Kategori	2 kanallı yardımcı eksenal kontrol
Giriş kanalı sayısı	-	IP derecesi	IP20 (with button key)
240 V ac Incandescent-halogen lamps	-	240 V ac LED lamps	-
Loads piloted from electronic transf. 240 V ac	-	LED colour	Mavi
Yerel kontrol	ön basmalı düğme aracılığıyla (düğme tuşuyla tamamlamak için)	Yükleme kontrolü	-
Malzeme	Teknopolimer		

### DIMENSIONAL

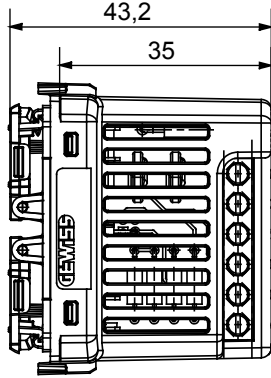

### TECHNICAL SYMBOLOGY

## IP

IP20 (with button key)

### STANDARDS/APPROVALS

