


Flush-mounting touch dimmer module. Two touch areas on the front for switching the connected load ON and OFF (short press) or for regulating the brightness (long press). The device must be completed with one of the ICE Touch plates available. Inside the package of the plates is a sheet of interchangeable icons to customize the control symbol. The device has N°3 DIP-switches, located on the back of the device, for feature configuration.

Tanım	Daha sönük dokunuş	Besleme ünitesi	100 ÷ 240 V ac - 50/60 Hz
Modül sayısı	1	Giriş kanalı sayısı	2
Yerel kontrol	Via 2 frontal touch areas (must be completed with ICE Touch plate)	Auxiliary input channel voltage	100 ÷ 240 V ac - 50/60 Hz
Depolama sıcaklığı	-25 ÷ +70 °C	Çıkış kanalı kanallar	1
Kullanım sıcaklığı	-5 ÷ +45 °C	Bağıl nem (yoğuşmasız)	Maks %93
240 V ac Incandescent-halogen lamps	4 ÷ 150 W	Front light signaling	Mavi led
240 V ac LED lamps	4 ÷ 150W (max 5 lamps)	Kablolama terminalleri	Vidalı
Loads piloted from electronic transf. 240 V ac	4 ÷ 150 VA (240 V ac)	Terminal sıkıştırma kapasitesi esnek kablolar (mm ²)	Maks. 1,5
240 V Floresan lambalar	-	Terminal sıkıştırma kapasitesi sert kablolar (mm ²)	Maks. 1,5
Yükleme kontrolü	Arka kenar	Bağlam	Dry indoor places
Acoustic signalling element	Buzzer	IP derecesi	IP20 (with plate fitted)
Standart	2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000		

DIMENSIONAL

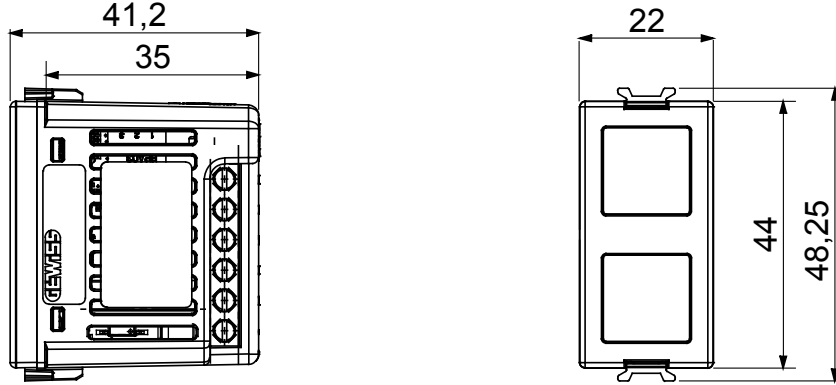

TECHNICAL SYMBOLOGY

IP

IP20 (with plate fitted)

STANDARDS/APPROVALS

