




Watertight plates IP55 System range for rectangular (3 and 4 modules) flush mounting boxes. Watertight plates self-supporting for the installation of System range devices. Ergonomic membrane, opening facilitated by a comfortable handle. IP55 degree guaranteed with closed lid and watertight plate mounted on smooth and waterproof walls, without grooves.

Tanım	4 m	Renk Çerçeve	Gri RAL 7035
Bitiş	Parlak	Malzeme	Teknopolimer
IP derecesi	IP55 (with closed lid)	Kapak	Zarlı
Membrane color için	Şeffaf	Sıva altı montaj kutusu için	Rectangular 4 modules
Screw material	2 screws (included)	Vida tipi	6/32 x 18 mm
Conta	Galvanizli çelik	Dahili kaide	kendi kendine yeten
Bilyeli termo sıcaklık	Vulcanized expanded rubber	Akkor Tel Deneyi:	650 °C
Çalıştırma sıcaklığı	70 °C	Standart	EN 60669-1
Maximum opening angle lid	-25 +60 °C	UV resistance	Yes (ISO 4892-2)
	100°	Elektrokod	0110

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Limited resistance	Resistant	Resistant	Resistant	Limited resistance	Not resistant	Not resistant	Not resistant	Limited resistance	Resistant

DIMENSIONAL

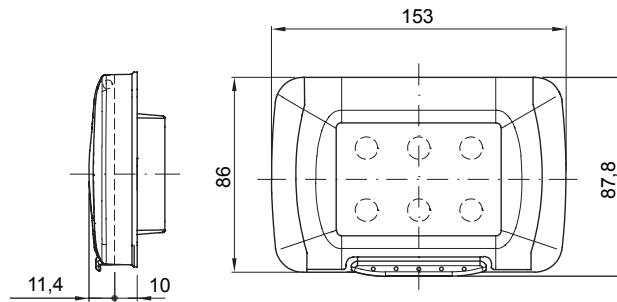

TECHNICAL SYMBOLOGY

IP

IP55 (with closed lid)

650 °C

70 °C



-25 +60 °C

STANDARDS/APPROVALS

