




Wide range of surface-mounting and flush-mounting boxes for domestic ranges with high mechanical robustness and accessories supplied: dividers, junction elements, mortarguard shield, etc. Completing the range, the distribution outlet boxes for floor-mounting installations can be personalised in terms of capacity, external design finish, and internal fittings (they take both System range components and DIN rail devices).

Hayır. boşluklar	8 m (4+4)	IP derecesi	IP40
Tür	For brick walls	Akkor Tel Deneyi:	650 °C
Kategori	Yerel aralık için	Bilyeli termo sıcaklık	70 °C
Standartlarla uyum	EN 60670-1 (CEI 23-48)	Dış boyut LxHxD (mm)	131x129x53
Malzeme	GW PLAST Technopolymer	Tespit kaideleri aks mesafesi	108.5 mm
Halogen Free	EN 60754-2 uyarınca halojen Free dir	Cable entries	4 x Ø 20/25/32 + 4 x Ø 20/25 + 4 x Ø 25/32 cut-outs
Renk	Orange RAL 2001	Type of cut-outs	Aletle çıkarılabilir
Kurulum sıcaklığı	-15 +60 °C		

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Not resistant	Not resistant	Limited resistance	Limited resistance	Not resistant	Not resistant	Not resistant	Limited resistance	Limited resistance	Limited resistance


DIMENSIONAL

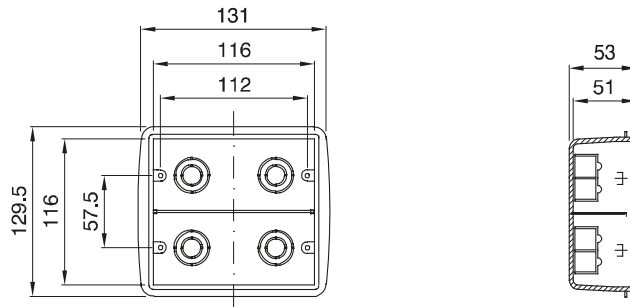

TECHNICAL SYMBOLOGY

GWT

650 °C



70 °C

HF

EN 60754-2 uyarınca halojen Free dir

STANDARDS/APPROVALS

