



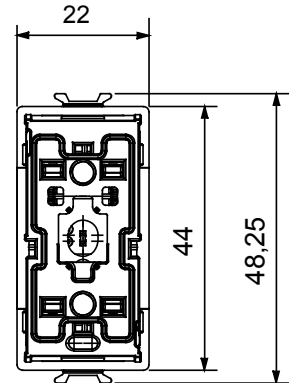

Flush-mounting axial one-way switch module. An axial push-buttons on the front for switching an ON/OFF load (bistable/momentary function) or a timed ON load via an output contact with potential. The device must be completed with the front buttons key available. The device has N°3 DIP-switches, located on the back of the device, for feature configuration.

|   |  |  |                           |
|---|--|--|---------------------------|
| Tanım   | Axial one-way switch module  | Besleme ünitesi                                | 100 ÷ 240 V ac - 50/60 Hz |
| Modül sayısı  | 1  | Giriş kanalı sayısı                            | 2                         |
| Yerel kontrol                                       | ön basmalı düğme aracılığıyla (düğme tuşuyla tamamlamak için)  | Auxiliary input channel voltage                | 100 ÷ 240 V ac - 50/60 Hz |
| Depolama sıcaklığı                                  | -25 ÷ +70 °C   | N. of LED input channels                       | -                         |
| Kullanım sıcaklığı                                  | -5 ÷ +45 °C  | LED input channels voltage                     | -                         |
| Bağıl nem (yoğuşmasız)                              | Maks %93   | Çıkış kanalı kanallar                          | 1                         |
| Front light signaling                               | Mavi led   | Çıkış kontaktarı                               | 1 Yok 5A (AC1) 240 V ac   |
| Kablolama terminalleri                              | Vidalı   | 240 V ac Incandescent-halogen lamps            | Max 1000 W                |
| Terminal sıkıştırma kapasitesi esnek kablolar (mm²) | Maks. 1,5  | 240 V ac LED lamps                             | Max 100 W (max 5 lamps)   |
| Terminal sıkıştırma kapasitesi sert kablolar (mm²)  | Maks. 1,5  | Loads piloted from electronic transf. 240 V ac | Max 250 VA                |
| Bağlam  | Dry indoor places  | 240 V Floresan lambalar                        | Max 120 W (max 6 lamps)   |
| IP derecesi   | IP20 (with button key)   | Yükleme kontrolü                               | -                         |
| Standart  | 2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000 |  |                           |

## DIMENSIONAL

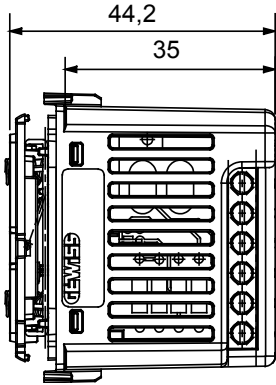

## TECHNICAL SYMBOLOGY

### IP

IP20 (with button key)

## STANDARDS/APPROVALS

