



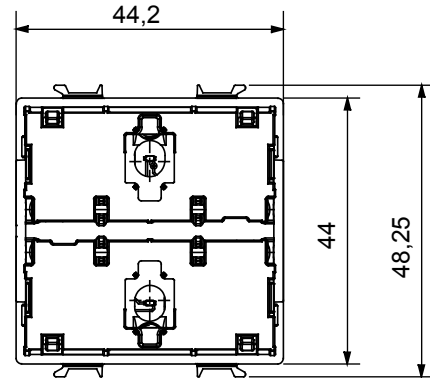

Flush-mounting axial dimmer module. Two axial push-buttons on the front for switching the connected load ON and OFF (short press) or for regulating the brightness (long press). The device must be completed with one of the front buttons key available. The device has N°3 DIP-switches, located on the back of the device, for feature configuration.

Tanım	Axial dimmer module	Besleme ünitesi	100 ÷ 240 V ac - 50/60 Hz
Modül sayısı	2	Giriş kanalı sayısı	2
Yerel kontrol	ön basmalı düğme aracılığıyla (düğme tuşuyla tamamlamak için)	Auxiliary input channel voltage	100 ÷ 240 V ac - 50/60 Hz
Depolama sıcaklığı	-25 ÷ +70 °C	N. of LED input channels	-
Kullanım sıcaklığı	-5 ÷ +45 °C	LED input channels voltage	-
Bağıl nem (yoğuşmasız)	Maks %93	Çıkış kanalı kanallar	1
Front light signaling	Mavi led	Çıkış kontakları	-
Kablolama terminalleri	Vidalı	240 V ac Incandescent-halogen lamps	4-150 W
Terminal sıkıştırma kapasitesi esnek kablolar (mm <sup>2</sup> )	Maks. 1,5	240 V ac LED lamps	4 ÷ 150W (max 5 lamps)
Terminal sıkıştırma kapasitesi sert kablolar (mm <sup>2</sup> )	Maks. 1,5	Loads piloted from electronic transf. 240 V ac	4 ÷ 150 VA (240 V ac)
Bağlam	Dry indoor places	240 V Floresan lambalar	-
IP derecesi	IP20 (with button key)	Yükleme kontrolü	Arka kenar
Standart	2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000		

### DIMENSIONAL

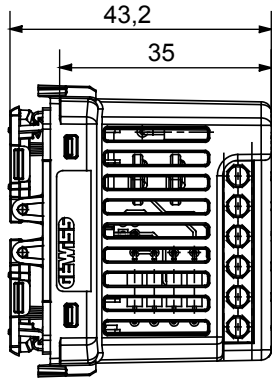

### TECHNICAL SYMBOLOGY

**IP**

IP20 (with button key)

### STANDARDS/APPROVALS

