



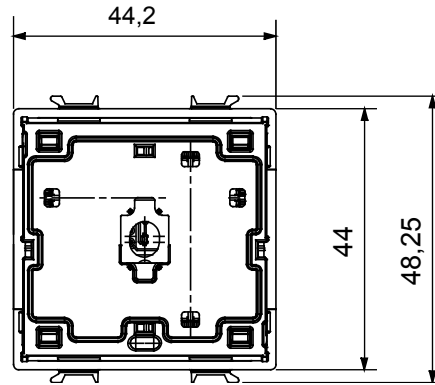

Flush-mounting axial auxiliary module with one command. An axial push-buttons on the front; this product can be used in combination with the auxiliary wired inputs of the following devices of the Chorusmart range: connected commands, connected 1- channel On/Off actuator, connected movement sensors, EVO commands, or as a wired command for a connected 2-channel ZigBee interface. The module with 1 auxiliary axial command can also be used to directly command small resistive or weakly inductive loads such as ringers and buzzers (max. 10VA);. The device must be completed with one of the front buttons key available.

Tanım	1 kanallı yardımcı eksenel komut	Besleme ünitesi	100 ÷ 240 V ac - 50/60 Hz
Modül sayısı	2	Giriş kanalı sayısı	-
Yerel kontrol	Ön basmalı düğme aracılığıyla (düğme tuşuyla tamamlamak için)	Auxiliary input channel voltage	-
Depolama sıcaklığı	-25 ÷ +70 °C	N. of LED input channels	1
Kullanım sıcaklığı	-5 ÷ +45 °C	LED input channels voltage	100 ÷ 240 V ac - 50/60 Hz
Bağıl nem (yoğuşmasız)	Maks %93	Çıkış kanalı kanallar	1
Front light signaling	Mavi led	Çıkış kontaktları	1A (AC1)
Kablolama terminalleri	Vidalı	240 V ac Incandescent-halogen lamps	-
Terminal sıkıştırma kapasitesi esnek kablolar (mm <sup>2</sup> )	Maks. 1,5	240 V ac LED lamps	-
Terminal sıkıştırma kapasitesi sert kablolar (mm <sup>2</sup> )	Maks. 1,5	Loads piloted from electronic transf. 240 V ac	-
Bağlam	Dry indoor places	240 V Floresan lambalar	-
IP derecesi	IP20 (with button key)	Yükleme kontrolü	-
Standart	2014/35/EU (LVD), 2011/65/EU + 2015/863 (RoHS), EN 60669-1, EN IEC 63000		

### DIMENSIONAL

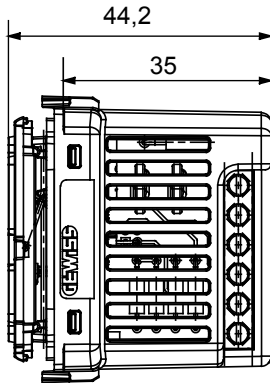

### TECHNICAL SYMBOLOGY

## IP

IP20 (with button key)

### STANDARDS/APPROVALS

