


Flush-mounting touch switch module. Two touch areas on the front for switching an ON/OFF load (bistable/momentary function) or a timed ON load via an output contact with potential. The device must be completed with one of the ICE Touch plates available. Inside the package of the plates is a sheet of interchangeable icons to customize the control symbol. The device has N°3 DIP-switches, located on the back of the device, for feature configuration.

Tanım	Tek yönlü anahtara dokunur	Besleme ünitesi	100 ÷ 240 V ac - 50/60 Hz
Modül sayısı	1	Giriş kanalı sayısı	2
Yerel kontrol	Via 2 frontal touch areas (must be completed with ICE Touch plate)	Auxiliary input channel voltage	100 ÷ 240 V ac - 50/60 Hz
Depolama sıcaklığı	-25 ÷ +70 °C	Çıkış kanalı kanallar	1
Kullanım sıcaklığı	-5 ÷ +45 °C	Çıkış kontaktları	1 Yok 5A (AC1) 240 V ac
Bağıl nem (yoğuşmasız)	Maks %93	240 V ac Incandescent-halogen lamps	Max 1000 W
Front light signaling	Mavi led	240 V ac LED lamps	Max 100 W (max 5 lamps)
Kablolama terminalleri	Vidalı	Loads piloted from electronic transf. 240 V ac	Max 250 VA
Terminal sıkıştırma kapasitesi esnek kablolar (mm²)	Maks. 1,5	240 V Floresan lambalar	Max 120 W (max 6 lamps)
Terminal sıkıştırma kapasitesi sert kablolar (mm²)	Maks. 1,5	Yükleme kontrolü	-
Bağlam	Dry indoor places	Acoustic signalling element	Buzzer
IP derecesi	IP20 (with plate fitted)	Standart	2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000

DIMENSIONAL

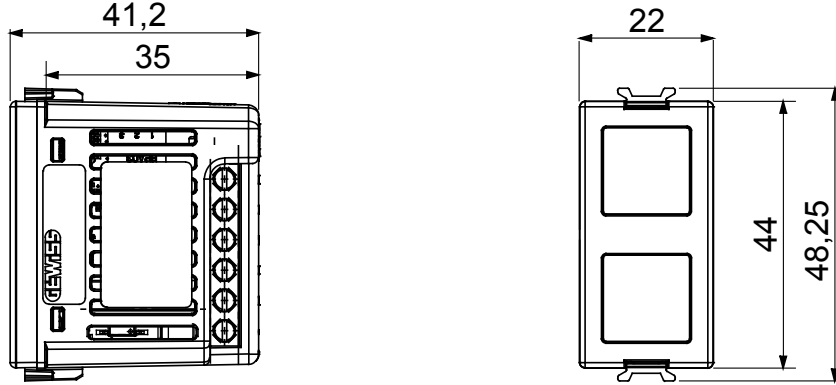

TECHNICAL SYMBOLOGY

IP

IP20 (with plate fitted)

STANDARDS/APPROVALS

